



Revision Notes.				
R1 -				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -



- NOTES:**
1. ALL EDGES TO BE DE-BURRED.
 2. BRACKET COATING = BLACK EPD.
 3. MATERIAL SHOULD BE 2MM THICK MILD STEEL.
 4. 1x M4x8MM BUTTON HEAD HEX SOCKET SCREW (NOT SHOWN) TO BE INCLUDED.
 5. M4 SCREW MUST PASS THROUGH Ø4.5MM HOLE AFTER POWDER COAT.
 6. INTENDED FOR USE WITH VBV-750 AND VBV-770 TYPE MONITORS.
 7. BRIGADE ELECTRONICS ACCEPTS NO RESPONSIBILITY FOR ANY DAMAGE TO PARTS CAUSED BY FAILURE TO USE CORRECT SCREW.
 8. FOR PRODUCT LABEL AND PACKAGING DETAILS REFER TO MASTER BOM.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

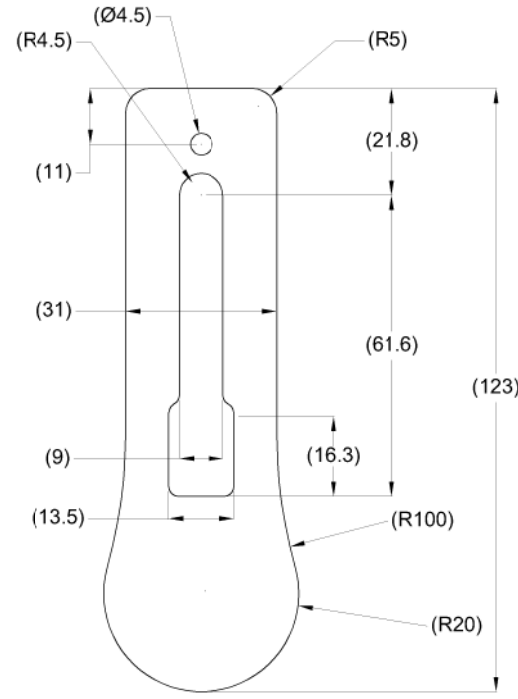

Assembly PI Approval W. CLARKE	Approved by B. CHILDS	Checked by W. BEAZLEY	Drawn by A. FOSTER
Angle of Projection 	Units mm	Scale N/A	Released 01/09/20
Status RELEASED	Assembly Ref BKT-VBV-BZ		
Part No 6240	BE-004410-00-20		