

Revision Notes:			
1. FERRITE ADDED TO POWER CABLE	Checked By: JN	Approved By: DK	Date Released: 11.07.11
2. FERRITE DETAIL ADDED	Checked By: JN	Approved By: SM	Date Released: 23.09.11

VIEW A



3 PIN MALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	BLACK	GND
2	RED	BUZZER POWER
3	WHITE	BUZZER SIGNAL

VIEW B






2 PIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	BLACK	GND
2	RED	SENSOR SIGNAL


NOTES:

1. PCB REVISION LEVEL: PCB-10015-00.
2. SOFTWARE VERSION: conert10hex
3. DIMENSIONS IN MM.
4. ON START UP THE ECU WILL BEEP ONCE FOR ONE FAULTY SENSOR, TWICE FOR TWO FAULTY SENSORS ETC.
5. ECU HOUSING IS ABS PLASTIC.
6. ECU FINISH IS TEXTURED BLACK PLASTIC, SILKSCREEN SHOULD BE WHITE.
7. SENSOR ENTRY POINTS IF NOT USED MUST BE FILLED WITH A BLANKING GROMMET.
8. THIS ECU MUST BE FITTED INSIDE A VEHICLE.
9. REFER TO DRAWING BE-001073-01-10 FOR PRODUCT LABEL.
10. REFER TO DRAWING BE-001564-00-11 FOR BATCH CODE LABEL.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVISED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

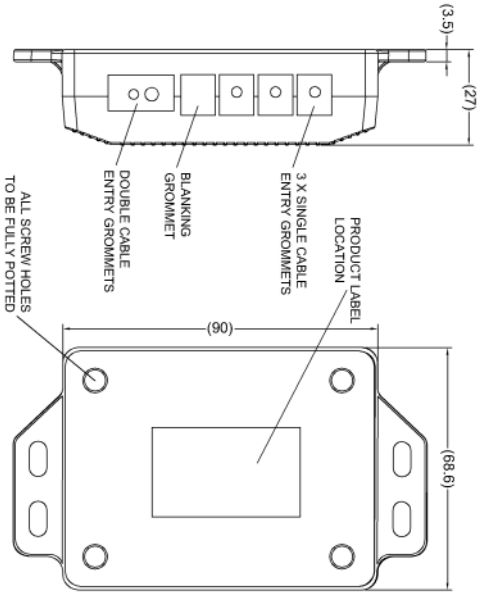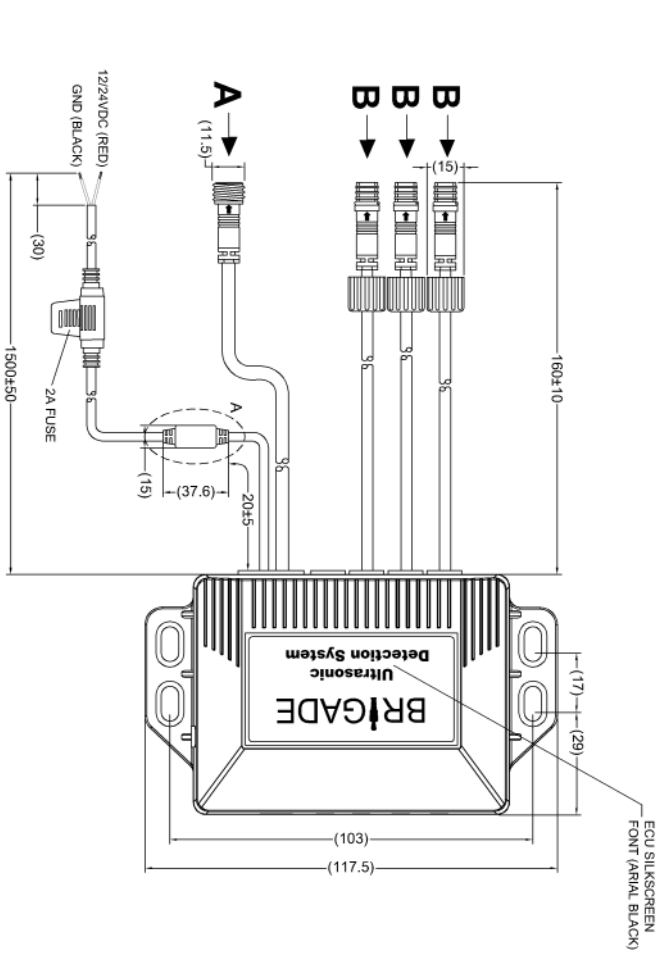

DIP SWITCH CONFIGURATION

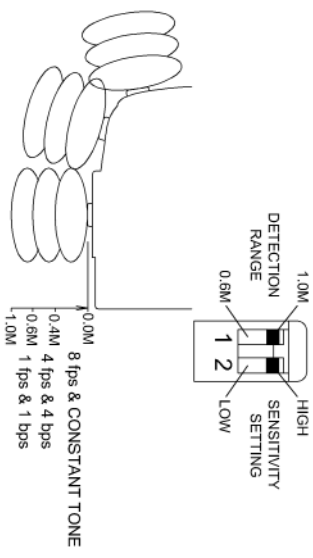

Assembly PI Approval		Checked by		Drawn by	
LEE QIG - 19.07.2011		M.POTTER		M.BUTLER	
Angle of Projection	Third Angle	Units	Scale	Released	Assembly Ref
		mm	N/A	01/08/2011	CEC-10015-40
Status	RELEASED	Stock Code	#3714	CS-3000-ECU	BE-001545-02-11