



VIEW A



PIN #	WIRE COLOUR	DESCRIPTION
1	NOT USED	NO CONNECTION
2	BLACK	GND
3	RED	+1224V
4	WHITE	CA1 VIEW ONLY
5	BLUE	CA2 VIEW ONLY
6	BROWN	SPLIT VIEW

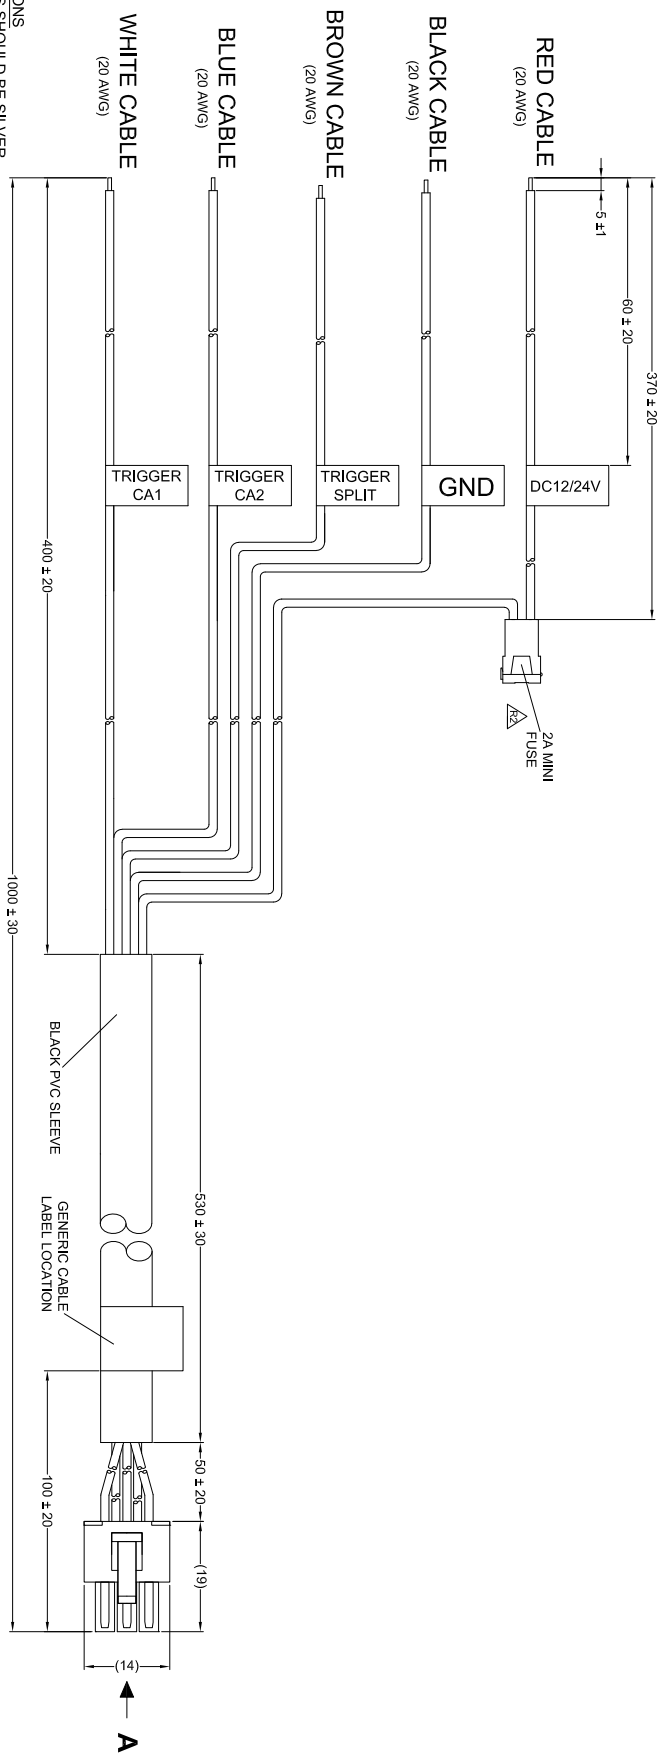

- SPECIFICATIONS**
- 1) ALL LABELS SHOULD BE SILVER.
 - 2) ALL INK SHOULD BE PERMANENT BLACK.
 - 3) FONT USED ON LABELS SHOULD BE ARIAL BLACK.
 - 4) ALL TEXT PRINTED SHOULD BE 4MM.
 - 5) STRIPED ENDS SHOULD BE TINNED.
 - 6) PVC 45P USED FOR SLEEVE.
 - 7) FUSE HOLDER PHYSICAL APPEARANCE MAY CHANGE ALTHOUGH FUNCTION AND RATING MUST REMAIN THE SAME.

- NOTES:**
1. CABLE TO BE HELD NEATLY TOGETHER BY TWIST TIE.
 2. PIN CONFIGURATION AS SPECIFIED IN DRAWING (DISREGARD PIN NUMBERS MOULDED ON TO CONNECTOR).
 3. MAXIMUM POSSIBLE RESISTANCE PERMITTED FOR CABLE IS 1.2Ω.
 4. CABLE TO BE SUPPLIED IN A SUITABLE PRESS SEAL BAG WHEN SUPPLIED AS A SPARE PART.
 5. FOR MANUFACTURING CONTROLS PLEASE REFER TO ASSEMBLY PLANT DRAWING #SV243-3 REVISION 1.0.
 6. FOR CABLE LABEL REFER TO LATEST REVISION OF GENERIC CABLE LABEL DRAWING BE-001500-XX-11.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

Revision Notes

R1 - LABEL DETAIL UPDATED	Drawn: BRAR	Checked: JINEMWAN	Approved: DKERAI	Date: 14/12/2010
R2 - FUSE HOLDER CHANGED TO MINI BLADE TYPE WITH COVER, NOTE 7 ADDED TO SPECIFICATIONS. (REF ECR CR-A368)	Drawn: MBUTLER	Checked: RBATES	Approved: B JOHN	Date: 20/07/15



<p>Angle of Projection</p> <p>Third Angle</p>	<p>Assembly Pl Approval</p> <p>YILING ZHANG (20/10/15)</p>	<p>Approved by</p> <p>DKERAI</p>	<p>Checked by</p> <p>RBATES</p>	<p>Drawn by</p> <p>B.CHILDS</p>
	<p>Status</p> <p>RELEASED</p>	<p>Units</p> <p>mm</p>	<p>Scale</p> <p>N/A</p>	<p>Released</p> <p>26/03/10</p>
<p>Part No</p> <p>3333</p>		<p>SS-002 CA</p>		<p>BE-001035-02-10</p>

1 2 3 4 5 6 7 8

Frame V3