


Revision Notes.				
R1 -				
APA: -	Drawn: -	Checked: -	Approved: -	Date: -


**VIEW A**



**5 PIN M12 CODE A  
MALE MATING FACE**

PIN #	WIRE COLOUR	DESCRIPTION
1	GREEN	VIDEO -
2	WHITE	VIDEO +
3	BLACK	GROUND
4	RED	POWER
5	BROWN	COMMS



**VIEW B**



**5 PIN M12 CODE A  
FEMALE MATING FACE**

PIN #	WIRE COLOUR	DESCRIPTION
1	GREEN	VIDEO -
2	WHITE	VIDEO +
3	BLACK	GROUND
4	RED	POWER
5	BROWN	COMMS

**VIEW A-A**

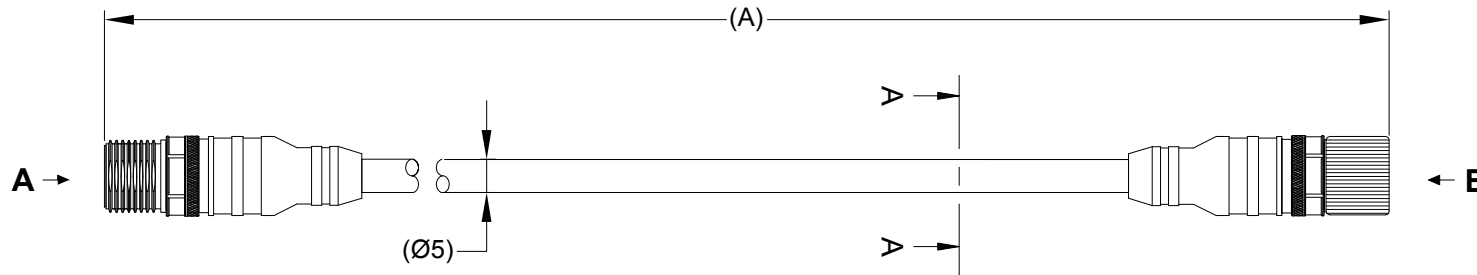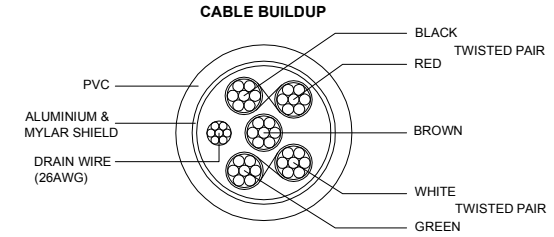

MODEL	PART #	LENGTH "A"	TOLERANCE
ASL360-L120	4333	20000	± 100
ASL360-L115	4334	15000	± 100
ASL360-L110	4335	1000	± 100
ASL360-L1025	4336	2500	± 50

**NOTES.**

- FOR MANUFACTURING CONTROL FULL SPECIFICATION REFER TO ASSEMBLY PLANT DRAWING IN DOCUMENT 0644\_6s1e
- INTERNAL CABLES SHOULD BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS
- ENSURE CONNECTORS ARE INSULATED WITH SELF AMALGAMATING TAPE

**PROPRIETARY NOTICE**

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

**BRIGADE**<sup>®</sup>  
www.brigade-electronics.com

Assembly Pl Approval NOT REQUESTED	Approved by S.MATTHEWS	Checked by B.CHILDS	Drawn by M.POTTER
Angle of Projection 	Units mm	Scale N/A	Released 21/02/13
	Status RELEASED	Assembly Ref 0644_6s1e	
	Part No SEE TABLE	ASL360-L1XXX BE-002329-00-13	