




VIEW A



SECTION Z-Z

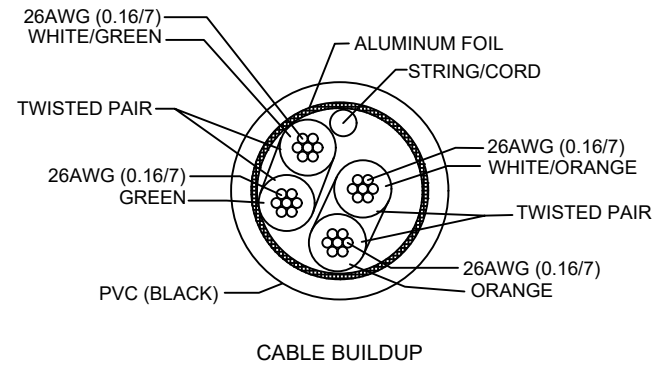

VIEW B




PIN #	WIRE COLOUR	DESCRIPTION
1	N/C	N/C
2	WHITE/ORANGE	TX+
3	N/C	N/C
4	ORANGE	TX-
5	N/C	N/C
6	WHITE/GREEN	RX+
7	N/C	N/C
8	GREEN	RX-

PIN #	WIRE COLOUR	DESCRIPTION
1	WHITE/ORANGE	TX+
2	ORANGE	TX-
3	WHITE/GREEN	RX+
4	N/C	NC
5	N/C	N/C
6	GREEN	RX-
7	N/C	N/C
8	N/C	N/C

- NOTES:
 1. INTERNAL CABLES SHOULD BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS
 2. HEATSHRINK TO BE FULLY SHRUNK AND SECURE TO CABLE
 3. FOR LABEL AND PACKAGING DETAILS REFER TO MASTER BOM.
 4. ANY CUSTOMER MODIFICATION OF THIS PRODUCT CAUSING SUBSEQUENT FAILURE IS NOT A LIABILITY OF BRIGADE ELECTRONICS PLC.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

Sheet 1 of 1	Assembly Pl Approval TIAN HU 18/08/2025	Approved by A. KING	Checked by I. MULAYIM	Drawn by D.HYSENI
Customer Approval -	Angle of Projection Third Angle	Units mm	Scale N/A	Released 20/08/25
 brigade-electronics.com		Status RELEASED	VBV-360-RJ45-CA	
		Part No 8323	BE-005048-00-25	