
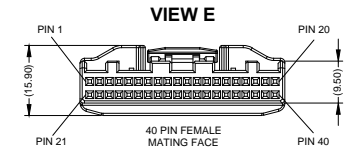





- 22 AWG THICKNESS WIRE
 ENDS HALF-CASTOFF
- HEAT SHRINK
- IDENTIFICATION CABLE LABELS
- BLUE CABLE (LABELLED REAR GEAR)
 - ORANGE CABLE (LABELLED FLASHER LEFT)
 - GREEN CABLE (LABELLED FRONT DEFAULT)
 - BROWN CABLE (LABELLED FLASHER RIGHT)
 - YELLOW CABLE (LABELLED V BATT)
 - RED CABLE (LABELLED ACC)
 - BLACK CABLE (LABELLED GND)

'VIEW E' CONNECTION MATRIX

PIN NUMBER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
LEFT CAM	-	-	-	-	-	-	-	-	-	-	-	-	6	3	-	-	-	-	-	-
RIGHT CAM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6	3	-	-	-	-
REAR CAM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6	3	-	-
FRONT CAM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6	3
CVBS	-	-	-	-	-	-	-	-	2	1	-	-	-	-	-	-	-	-	-	-
CVBS-RV	-	-	-	-	-	-	-	-	-	-	2	1	-	-	-	-	-	-	-	-
UART	-	-	-	-	-	-	-	-	-	-	2	1	-	-	-	-	-	-	-	-
KEY BOX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CABLES	BLACK	-	-	RED	BROWN	ORANGE	BLUE	GREEN	BLACK	WHITE	BLACK	WHITE	WHITE	GREEN	WHITE	GREEN	WHITE	GREEN	WHITE	GREEN
DESCRIPTION	GROUND	-	-	IGN 12-24V + DC	FLASHER RIGHT	FLASHER LEFT	REVERSE GEAR	FRONT DEFAULT	CVBS	CVBS	CVBS-RV	CVBS-RV	LEFT CAM	LEFT CAM	RIGHT CAM	RIGHT CAM	REAR CAM	REAR CAM	FRONT CAM	FRONT CAM

PIN NUMBER	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
LEFT CAM	-	-	-	-	-	-	-	-	-	-	-	-	6	2	-	-	-	-	-	-
RIGHT CAM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6	2	-	-	-	-
REAR CAM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6	2	-	-
FRONT CAM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6	2
CVBS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CVBS-RV	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
UART	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
KEY BOX	-	-	-	4	3	2	1	-	-	-	-	-	-	-	-	-	-	-	-	-
CABLES	YELLOW	-	-	BLACK	WHITE	GREEN	RED	RED	WHITE	BLACK	-	-	BLACK	RED	BLACK	RED	BLACK	RED	BLACK	RED
DESCRIPTION	12-24V DC	-	-	KEY BOX	KEY BOX	KEY BOX	KEY BOX	KEY BOX	UART	UART	UART	-	LEFT CAM	LEFT CAM	RIGHT CAM	RIGHT CAM	REAR CAM	REAR CAM	FRONT CAM	FRONT CAM



NOTES
 1. HEAT SHRINK LABELING IS FREE TO MOVE ON CABLE AND CONTROLLED BY MANUFACTURE
 2. FOR GENERIC CABLE LABEL REFER TO LATEST REVISION OF DRAWING BE-002644-XX-13.
 3. ALL STRIPPED CABLES ARE 22 AWG.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPRIORATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
 www.brigade-electronics.com

Assembly PI Approval Y.J. LEE 20/04/15	Approved by B.CHILDS	Checked by M.POTTER	Drawn by P.MISSEN
Angle of Projection Third Angle	Units mm	Scale N/A	Released 20/04/15
Status RELEASED	Part No 4486A	Assembly Ref BN360-10H-01	Part No BE-003089-00-15