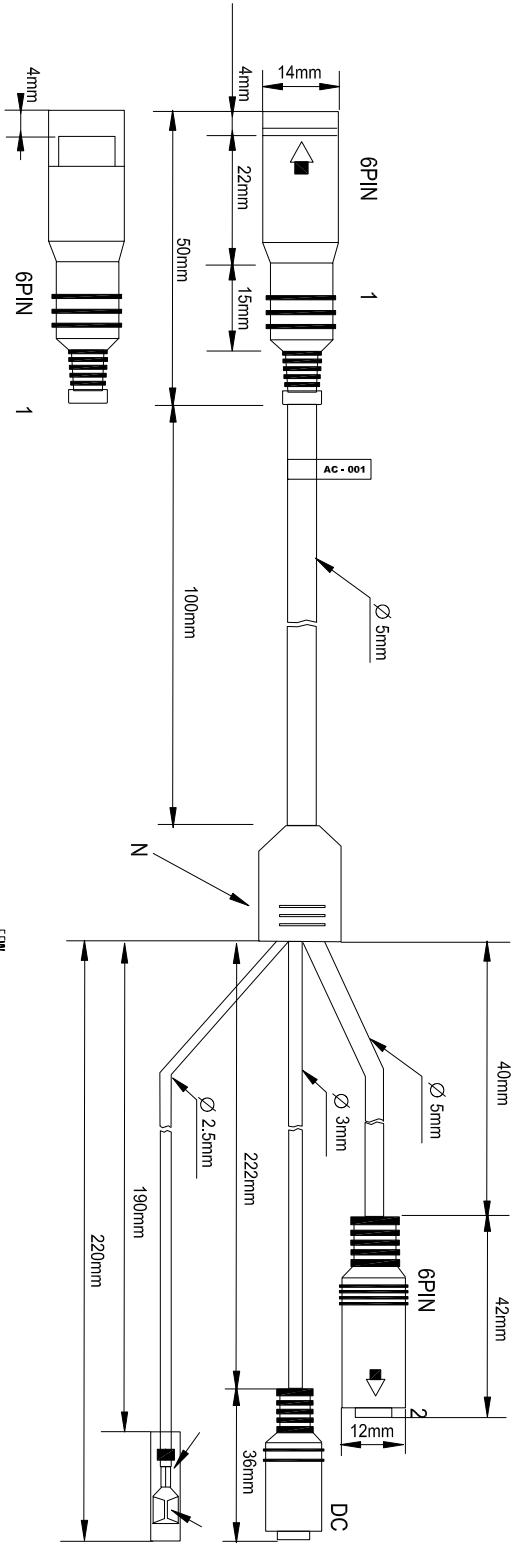


CONNECTION METHOD

6PIN 1	1	3	5	4 (GREEN)
6PIN 2	6	1	4	3
DC		OK		2.
BLUE WIRE		OK		

SPECIFICATIONS

- 1) ALL LABELS SHOULD BE SLIVER.
- 2) ALL INK SHOULD BE PERMANENT BLACK.
- 3) FONT USED ON LABELS SHOULD BE AERIAL BLACK.
- 4) ALL TEXT PRINTED SHOULD BE 4MM.
- 4) ALL CABLES SHOULD BE AT LEAST 26AWG.
- 5) ALL STRIPED ENDS SHOULD BE TINNED.
- 6) ALL UNITS ARE MEASURED IN MM.
- 7) CAMERA CONNECTOR GUIDE MUST LINE UP WITH ARROW.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS PLC, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS PLC.

MANUFACTURING NUMBER: EW211-1				RELEASED MODEL NUMBER: AC-001			
Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference		
Designed by DKERAL	Checked by	Approved by - date		File name AS	Date 28/08/04	Scale N/A	
BRIGADE ELECTRONICS PLC				AC-001__(1850)			
BE-000318-00-05				Edition A	Sheet 1/1		