


Revision Notes:
 1. CONNECTOR DETAIL REVISED AND NOTES UPDATED.

Drawn: R.B | Checked: G.P | Approved: S.M | Date: 31/01/13


VIEW A
HOOK



4 PIN MALE HOOK AND LOCK MATING FACE


PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	RED	+12V
3	WHITE	AUDIO
4	BLACK	GND

VIEW B



4 PIN MINI DIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	NOT USED	N/C
3	WHITE	AUDIO
4	RED	+12V
5	SHIELD	GND

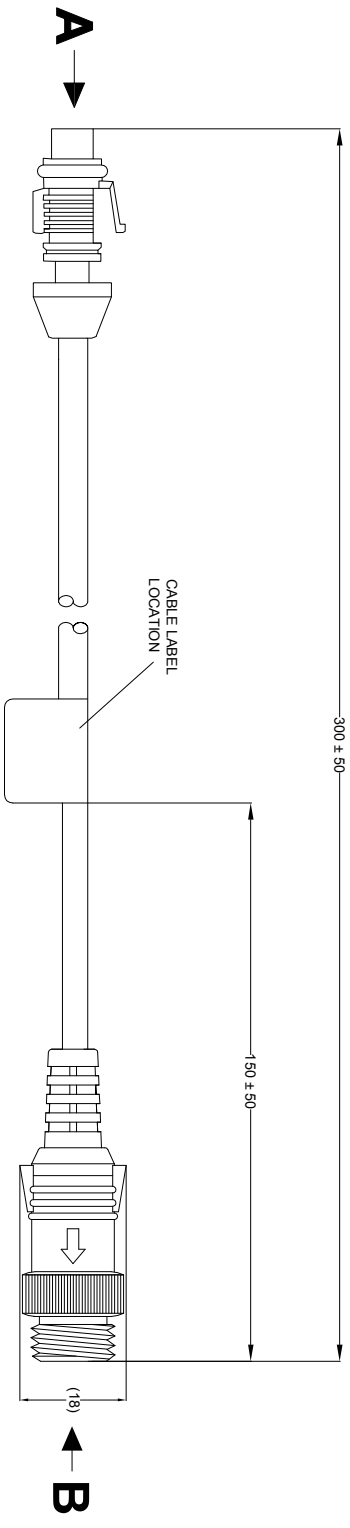

NOTES:

- 1) ENSURE ARROWS LINE UP WITH LOCATING LUG ON CONNECTOR.
- 2) CABLE MUST BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS.
- 3) CABLE COLOURS ARE SUBJECT TO CHANGE.
- 4) FOR CABLE LABEL REFER TO GENERIC CABLE LABEL DRAWING BE-001500-XX-11
- 5) MAXIMUM POSSIBLE RESISTANCE PERMITTED 1.0Ω
- 6) FOR MANUFACTURING CONTROLS PLEASE REFER TO ASSEMBLY PLANT DRAWING 5HN 415 AV (AC-003)

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly Pt Approval 	Approved by	Checked by	Drawn by
	Units	Scale	Released
Angle of Projection	mm	N/A	28/04/08
Third Angle	Status	Released	Assembly Ref
	RELEASED		5HN 415 AV (AC-003)
Part No	AC-003		
1908	BE-000552-01-08		