



VIEW A

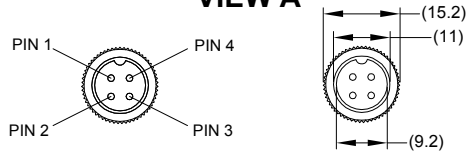

4 PIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12V
2	BLACK/SHIELD	GND
3	WHITE	AUDIO
4	YELLOW	VIDEO


VIEW B

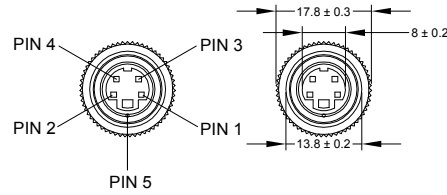

4 PIN MINI DIN FEMALE MATING FACE



PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	RED	+12V
3	N/A	N/C
4	WHITE	AUDIO
CASE	BLACK/SHIELD	GND

CABLE BINDING SPECIFICATION

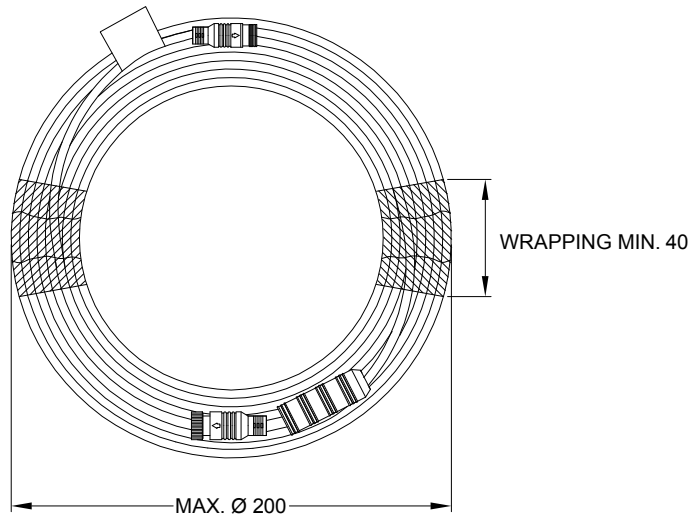

VIEW A-A

CABLE BUILDUP

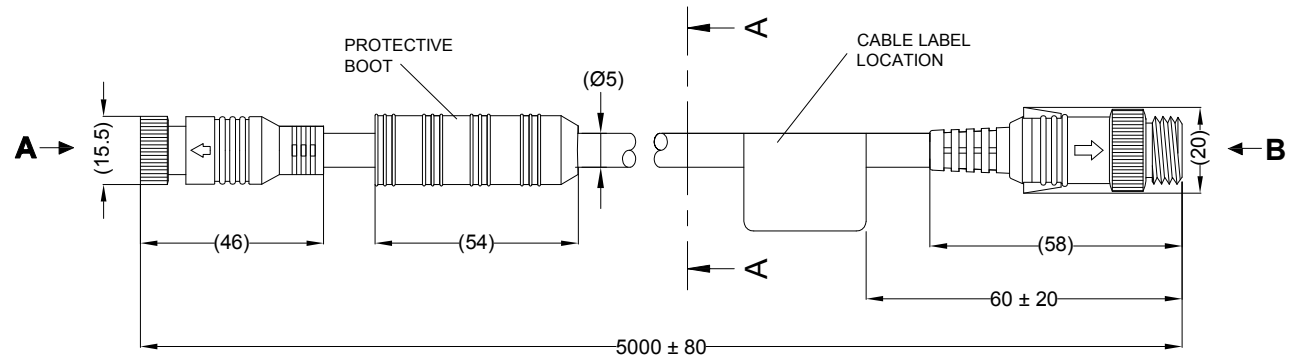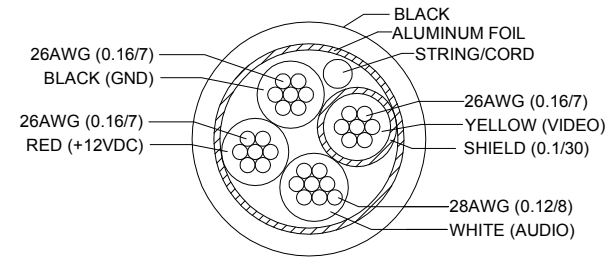

NOTES:

1. CABLE MUST BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS
2. PROTECTIVE BOOT SHOULD BE WITHIN 200MM OF CONNECTOR A.
3. ENSURE PROTECTIVE BOOT IS USED IN INSTALLATION.
4. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF BE-002144-XX-12.
5. FOR GENERIC CABLE LABEL DETAIL REFER TO LATEST REVISION OF BE-001500-XX-11.
6. MAXIMUM POSSIBLE RESISTANCE PERMITTED 2.3Ω.
7. CABLE TO BE PROVIDED IN A SUITABLE ADEQUATELY SIZED BAG WITH GIFTBOX LABEL AFFIXED TO THE CENTRE.
8. FOR MANUFACTURING CONTROLS PLEASE REFER TO ASSEMBLY PLANT DRAWING #SV136-5 REVISION 1.1.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
www.brigade-electronics.com

Assembly Pl Approval J. LAM 08/12/15	Approved by S.MATTHEWS	Checked by L.PILLAY	Drawn by B.CHILDS
Angle of Projection 	Units mm	Scale N/A	Released 09/12/15
Status RELEASED	Part No 5049	AC-014(5m)	
Third Angle		BE-003266-00-15	