



Revision Notes			
R1 - DRAWING TITLE REVISED			
APPA: -	Drawn:-	Checked: DDKERALI	Approved: S.MATTHEWS Date: 19/03/09
R2 - PIN OUT DETAIL ON CONNECTOR B REVISED	Drawn:-	Checked: -	Approved: - Date: -
APPA: -	Drawn:-	Checked: -	Approved: - Date: -
R3 - CABLE DIMENSIONS REVISED, FRAME UPDATED, DRAWING RE-DRAWN.	Drawn:-	Checked: -	Approved: - Date: -
APPA: -	Drawn:-	Checked: -	Approved: - Date: -
R4 - PIN TABLE CORRECTED, CABLE BUILDUP ADDED. AS PER 01535.	Drawn:-	Checked: -	Approved: - Date: -
APPA: X.HUANG	Drawn: RBATES	Checked: B.CHILDS	Approved: G.PULTH Date: 12/09/13



13 PIN FEMALE
MATING FACE





6-PIN MINI DIN MALE
MATING FACE



VIEW A PIN #	1	2	3	4	5	6	7	8	9	10	11	12	13	CASE
VIEW B PIN #	5	2	/	/	/	/	/	/	/	/	/	/	/	3
COLOUR	RED	BROWN	/	/	/	/	/	/	/	/	/	/	/	ORANGE
FUNCTION	+12/24V	TRIGGER 3	/	/	/	/	/	/	/	/	/	/	/	VIDEO

VIEW A-A

CABLE BUILDUP

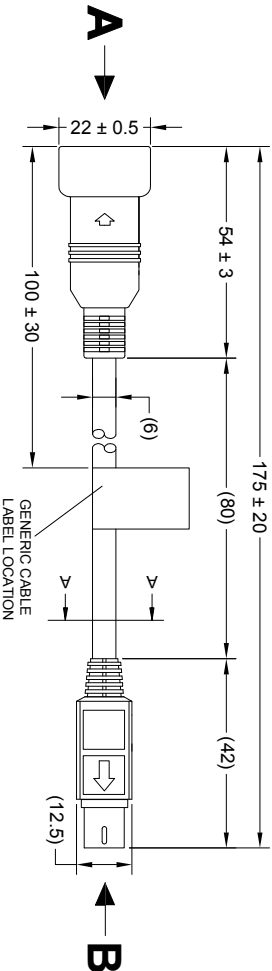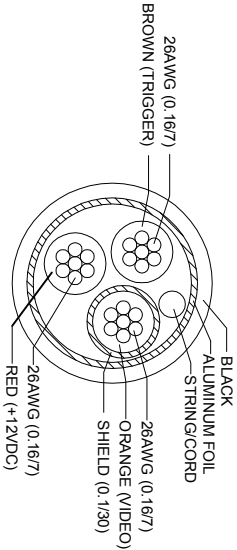


- NOTES:
1. ENSURE ARROWS LINE UP WITH LOCATING LUG ON CONNECTOR.
 2. CABLE MUST BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS
 3. FOR GENERIC CABLE LABEL REFER TO LATEST REVISION OF DRAWING BE-001500-XX10.
 4. FOR MANUFACTURING CONTROLS PLEASE REFER TO ASSEMBLY PLANT DRAWING #SV165-6 REVISION 1.4.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
www.brigade-electronics.com



Third Angle

Part No 2930		Approved by S.MATTHEWS		Checked by DKERALI		Drawn by MBUTLER	
Status RELEASED		Units mm	Scale N/A	Released 31/07/08	Assembly Ref -		
AC-022							
BE-000632-04-08							