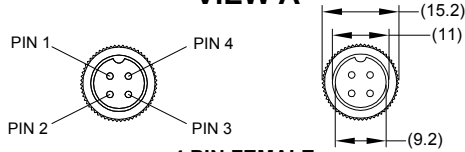
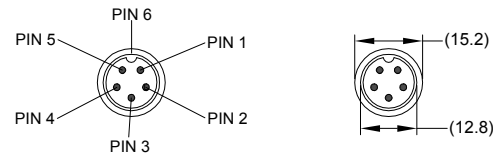


VIEW A

4 PIN FEMALE
MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12V
2	BLACK/SHIELD	GND
3	WHITE	AUDIO
4	YELLOW	VIDEO

VIEW B

5 PIN MALE
MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	THIN RED	+12V
2	THICK RED	12/24V SHUTTER POWER
3	WHITE	AUDIO
4	YELLOW	VIDEO
5	BLACK/SHIELD	GND
CASE	BLACK/SHIELD	GND

Revision Notes.

R1 - TYPE OF FUSE CHANGED

APA: - Drawn:- Checked:M.BUTLER Approved:D.KERAI Date: 31/03/11

R2 - VIEW "A" PINOUT TABLE UPDATED

APA: - Drawn:- Checked:M.BUTLER Approved:D.KERAI Date: 05/05/11

R3 - MOLDED CONNECTOR ADDED.


APA: - Drawn:- Checked:L.BRAR Approved:D.KERAI Date: 23/11/11

R4 - 4 AND 5 PIN MATING FACES AND TABLES UPDATED.

APA: X.HUANG Drawn:R.BATES Checked:B.CHILDS Approved:G.PLITH Date: 26/06/13

R5 - MOULDED CONNECTOR CORRECTED TO REFLECT PRODUCT AS PER Q1767.

APA: Y.ZHANG Drawn:R.BATES Checked:B.CHILDS Approved:B.JOHN Date: 04/12/15

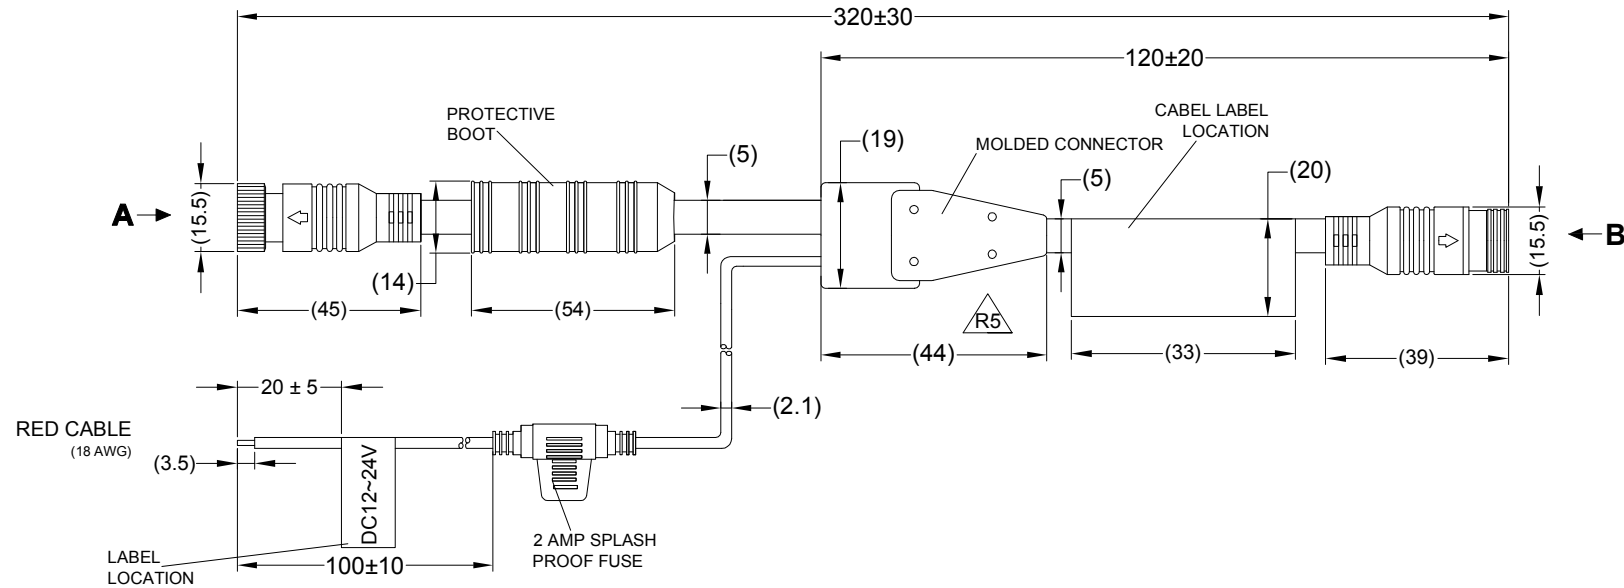


NOTES:

- ENSURE ARROWS LINE UP WITH LOCATING LUG ON CONNECTOR.
- CABLE MUST BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS.
- PROTECTIVE BOOT SHOULD BE WITHIN 100MM OF CONNECTOR "A".
- ENSURE PROTECTIVE BOOT IS USED IN INSTALLATION.
- CONNECTOR "B" SHOULD BE BROWN.
- CONNECTOR "A" SHOULD BE BLACK.
- FOR CABLE LABEL REFER TO DRAWING: BE-001500-XX-11.
- FOR MANUFACTURING CONTROLS PLEASE REFER TO ASSEMBLY PLANT DRAWING #SV348-3 REVISION 1.3.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
www.brigade-electronics.com

Assembly Pl Approval SHADOW	Approved by D.KERAI	Checked by M.BUTLER	Drawn by J.NEWMAN
Angle of Projection  Third Angle	Units mm	Scale N/A	Released 23/03/11
Status DRAFT	AC-035		
Part No 3702	BE-001442-05-11		