


Revision Notes.				
R1 -				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -

CHANGES FROM BASE PRODUCT AC-24-12(001) (4235) TO AC-24-12(007) (4762)


- CHANGE:
1. REPLACE 4 PIN MALE MINI DIN CONNECTOR WITH OVER MOULDED 4 CORE CABLE.
 2. TE CRIMP TERMINALS ADDED.
 3. APPLY AC-24-12(007) CBL-LBL OVER MODEL NUMBER AND PART NUMBER ON AC-24-12(001) CBL-LBL.
 4. REPLACE AC-24-12(001) GB-LBL WITH AC-24-12(007) GB-LBL.
 5. INSTALLATION GUIDE AC-24-12(007)-IG (4841) ADDED.

- OPERATION:
1. NO AUDIO.

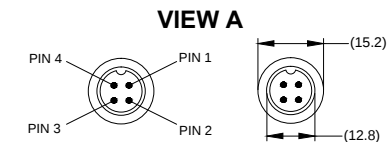

**4 PIN MALE
MATING FACE**

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12v
2	BLACK/SHIELD	GND
3	WHITE	N/C
4	YELLOW	VIDEO

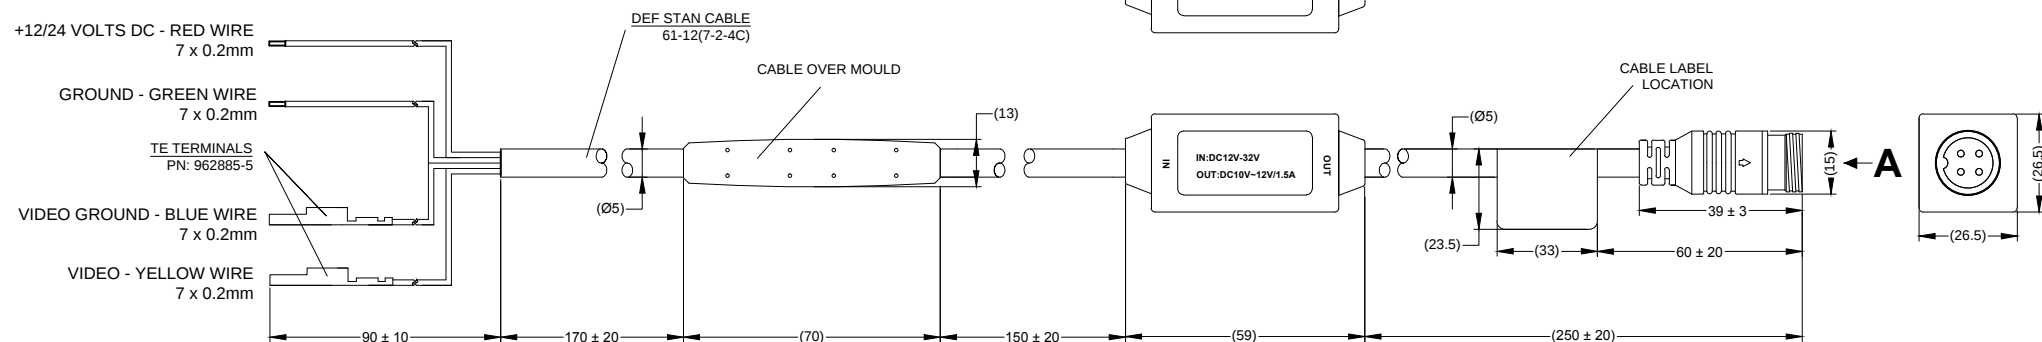


NOTES:

1. FOR CABLE LABEL REFER TO LATEST REVISION OF DRAWING BE-003028-XX-14 & BE-1500-XX-11.
2. FOR GIFT BOX LABEL REFER TO LATEST REVISION OF DRAWING BE-003027-XX-14.
3. 24Vdc TO 12Vdc VOLTAGE REGULATOR ENCASED IN MOLDED BLOCK.
4. MAXIMUM OUTPUT CURRENT 1.5 AMPS.
5. ARROW MUST LINE UP WITH CONNECTOR LUG.
6. COMPATIBLE WITH IVECO IVECONNECT VEHICLES. REFER TO MANUFACTURERS GUIDELINES FOR OTHER MODELS.
7. WIRE JOINTS MUST BE INDIVIDUALLY COVERED WITH HEAT SHRINK.
8. SHIELD MUST BE COVERED WITH HEAT SHRINK.
9. POWER SUPPLY MUST BE FUSED AT SOURCE.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
www.brigade-electronics.com

Assembly PI Approval S.ATTWOOD 23/12/14		Approved by B.JOHN		Checked by M.POTTER		Drawn by P.MISSEN	
Angle of Projection 		Units mm	Scale N/A	Released 02/01/15		Assembly Ref -	
Third Angle		Status RELEASED		AC-24-12(007)			
		Part No 4762		BE-003026-00-14			