


Revision Notes.				
R1 -				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -


VIEW A-A

CABLE BUILDUP

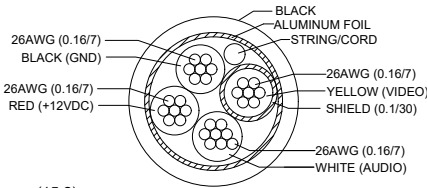


VIEW B-B

CABLE BUILDUP

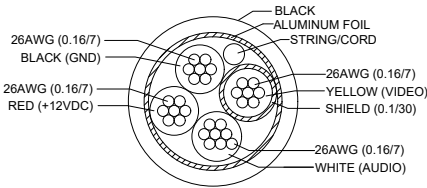


VIEW C-C

CABLE BUILDUP

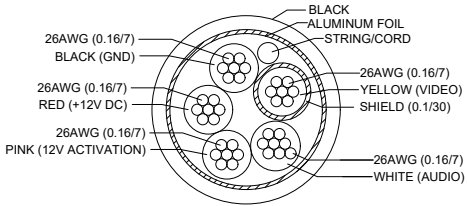


VIEW A

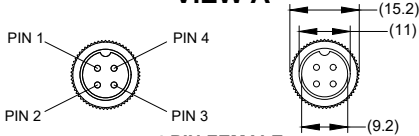


4 PIN FEMALE
MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12V DC
2	BLACK/SHIELD	GND
3	WHITE	AUDIO
4	YELLOW	VIDEO

D-D




VIEW B

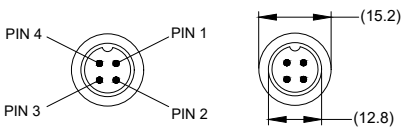

4 PIN MALE
MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12V DC
2	BLACK/SHIELD	GND
3	WHITE	AUDIO
4	YELLOW	VIDEO

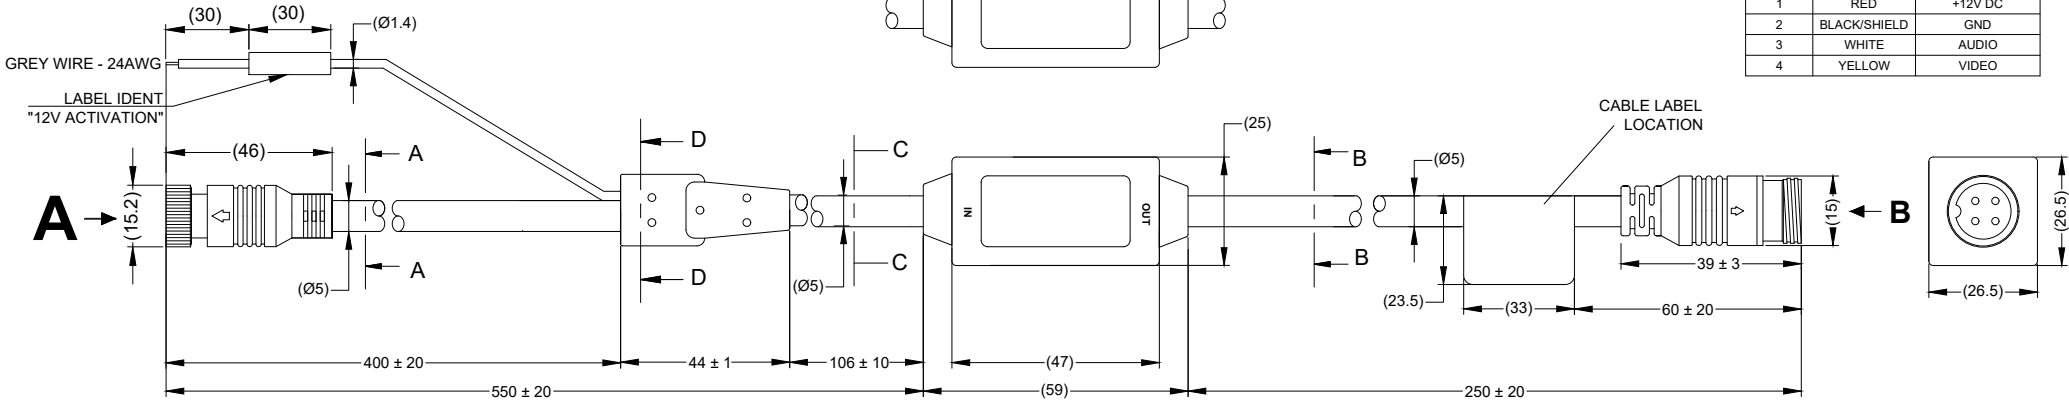

NOTES:

- FOR PRODUCT LABEL AND PACKAGING DETAILS REFER TO MASTER BOM.
- MAXIMUM OUTPUT CURRENT 2 AMPS.
- ARROW MUST LINE UP WITH CONNECTOR LUG.
- "12V ACTIVATION WIRE" TO BE STRIPPED 5 ± 1, WITH SOLDER PLATED TIPS.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
www.brigade-electronics.com

Assembly PI Approval J.LAM 26/10/2021	Approved by S.LAVER 26/01/2022	Checked by J. STEWART	Drawn by S. LAVAL
Angle of Projection	Units mm	Scale N/A	Released 26/01/2022
Third Angle	Status RELEASED	AC-24-12(018)	
	Part No 7018	BE-004607-00-21	