


Product Specification



Brigade Model Number: AC-H014(5M)
Part Number: 5635

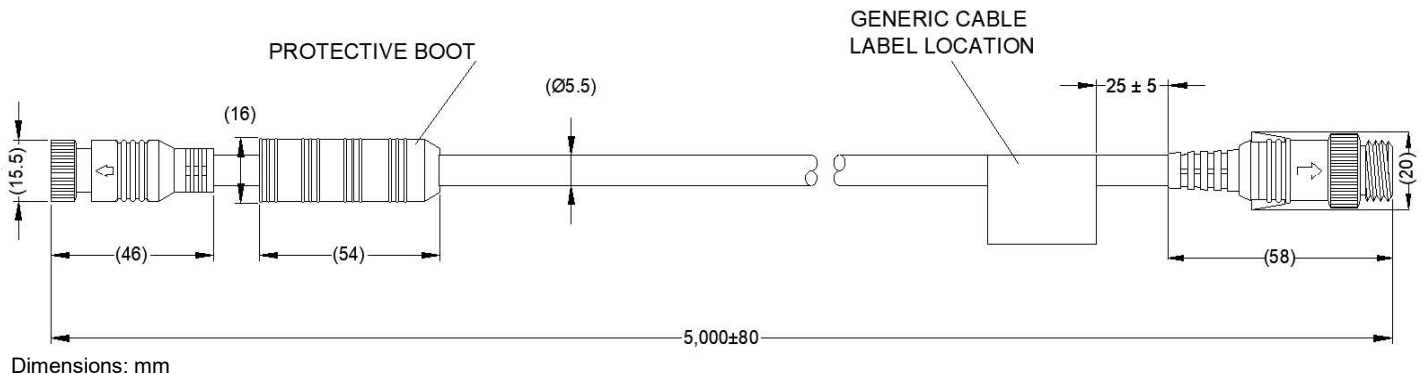

Environmental Specifications:

- IP rating: IP68 and IP69K
- Operating temperature: -30°C to +70°C
- Storage temperature: -40°C to +85°C

Approved Standards:

- E-Mark (UNECE Regulation 118 Rev 02)
- Elements of ISO 14572:2011 / ISO 6722:2011
- Ingress protection - (ISO 20653:2013)
- RoHS2
- WEEE

Technical Specifications:

- Cable resistance: <1Ω
- Screening resistance: <1Ω
- Maximum DC operating voltage: 60V (DC)
- Minimum bending radius: 4.2mm
- Cable thickness: Ø5.5mm

Technical Specifications Continued...

- Insulation breakdown: max. 2kV for 3s
- Cable length: 5 meters
- Cores type: 26AWG
- Screening type: Overall Cable: Aluminium Foil
Video Wire: Braided Wire
- Weight: 220 grams
- Outside insulator material: PVC
- Colour: Black
- Connection type: VBV female to BE female

Features:

- Extension cable for Brigade's high definition CMS.
- Connects an Elite camera to a Select cable.
- Combines an adapter cable together with a 5m long cable.
- Cable for use with non-shutter camera.
- Backwards compatible with Brigade's CVBS Elite camera range.

Package Contents:

1x AC-H014(5M) - Cable