



Revision Notes:			
1. REMOVED FROM SPECIFICATION - LINE UP WITH ARROWS			
Checked By: JIN	Approved By: DK	Date Released: 11/1/12	

VIEW A



PIN #	WIRE COLOUR	DESCRIPTION
1	RED	12/24 Vdc
2	GREEN	TRIGGER 1
3	WHITE	TRIGGER 2
4	BLACK	GROUND

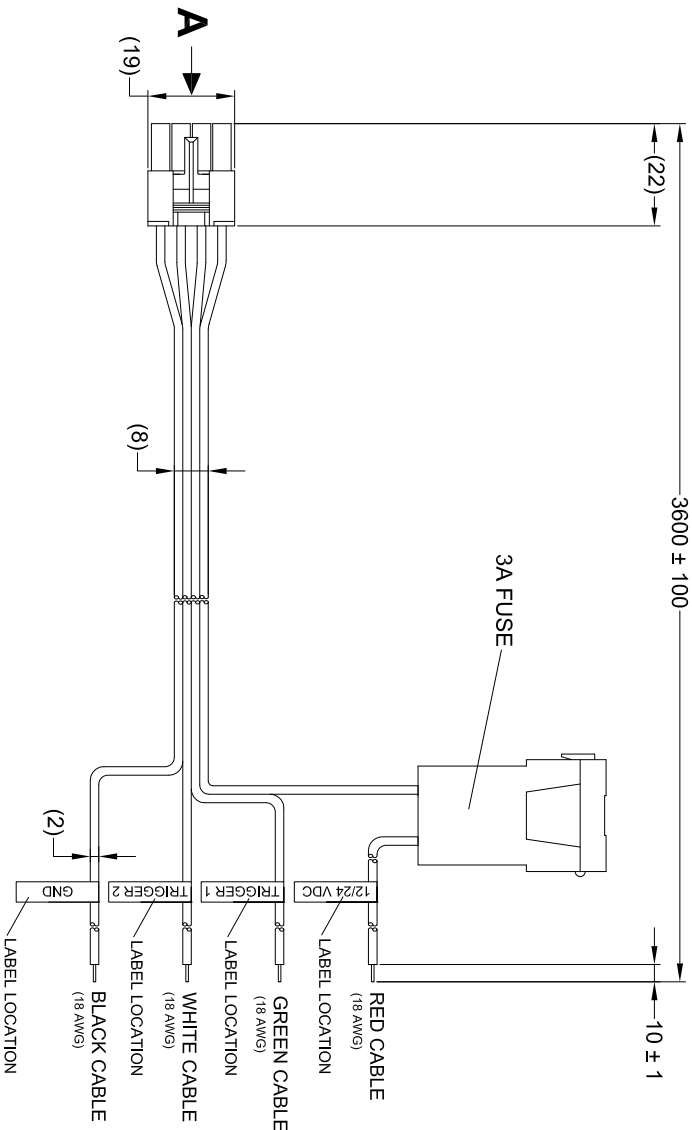


SPECIFICATIONS

- 1) ALL LABELS SHOULD BE SILVER.
- 2) ALL INK SHOULD BE PERMANENT BLACK.
- 3) FONT USED ON LABELS SHOULD BE ARIAL BLACK.
- 4) ALL TEXT PRINTED SHOULD BE 4MM.
- 5) ALL STRIPED ENDS SHOULD BE TINNED.
- 6) CABLE TO BE HELD TOGETHER NEATLY WITH TWIST TIE.

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
www.brigade-electronics.com



Third Angle

Assembly PI Approval		Approved by		Checked by		Drawn by	
AKIM		DKERAI		JINEMMAN		MBUTLER	
Angle of Projection		Units		Scale		Released	
		mm		N/A		14./10./11	
		Status					
		RELEASED				BE-8XXXM-PC	
		Stock Code				BE-000937-00-09	