


Revision Notes.				
R1 -				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -

VIEW A





13 PIN FEMALE
MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	PINK	CA2 VIDEO
2	LIGHT BLUE	CA2 12VDC
3	BROWN	CA1 TRIGGER
4	ORANGE	CA2 AUDIO
5	YELLOW	CA1 VIDEO
6	PURPLE	CA1 12VDC
7	DARK BLUE	CA2 TRIGGER
8	GREEN	CA1 AUDIO
9	WHITE	CA2 9VDC**
10	CYAN	CA1 9VDC**
11	GREY	N/C
12	BLACK/SHIELD	GROUND
13	RED	12/24VDC
14	OUTER SHIELD	GROUND

**9VDC IS ONLY SUPPLIED WHEN THE MONITOR
IS PUT IN SHUTTER MODE VIA THE OSD MENU.


VIEW B

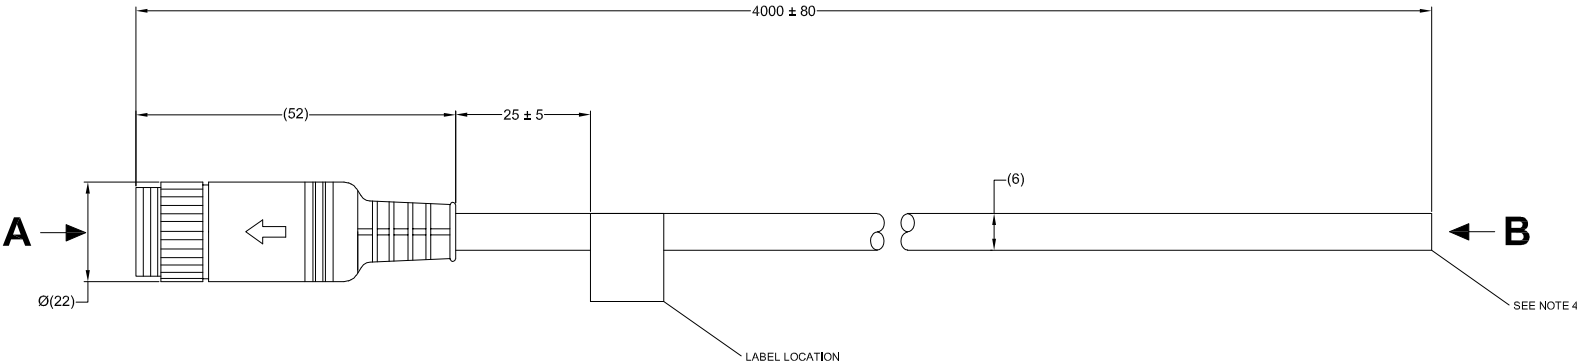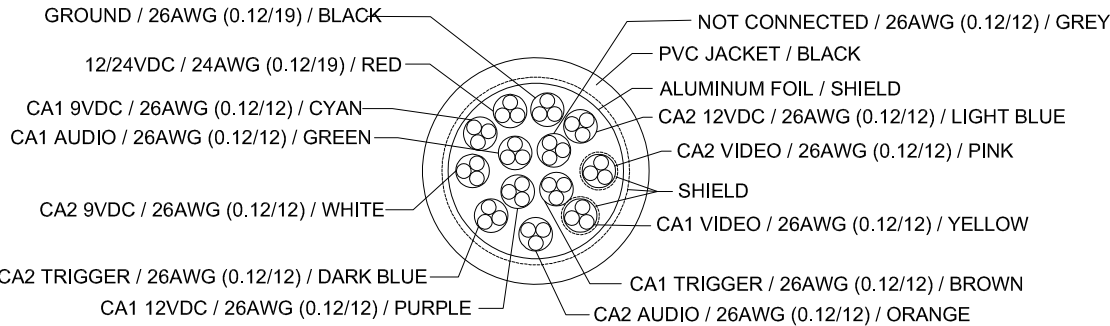

- NOTES:
- FOR PACKAGING AND LABELLING DETAILS REFER TO MASTER BOM
 - ANY CUSTOMER MODIFICATION OF THIS PRODUCT CAUSING SUBSEQUENT FAILURE IS NOT A LIABILITY OF BRIGADE ELECTRONICS PLC
 - CONNECTOR GUIDES MUST LINE UP WITH ARROW
 - CABLES SHOULD BE ONE CONTINUOUS LENGTH
 - CABLE TO BE CUT FLUSH AT 4000mm WITH NO PROTRUDING WIRES

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
www.brlgade-electonlcs.com

Assembly Pl Approval T.CHOI 11/09/19	Approved by B.CHILDS	Checked by A.FOSTER	Drawn by W SINDEN
Angle of Projection 	Units mm	Scale N/A	Released 11/09/19
Status RELEASED	BE-970WM-STCA(4.0)		
Part No 5535	BE-003865-00-18		