

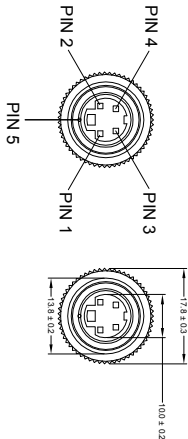


VIEW A

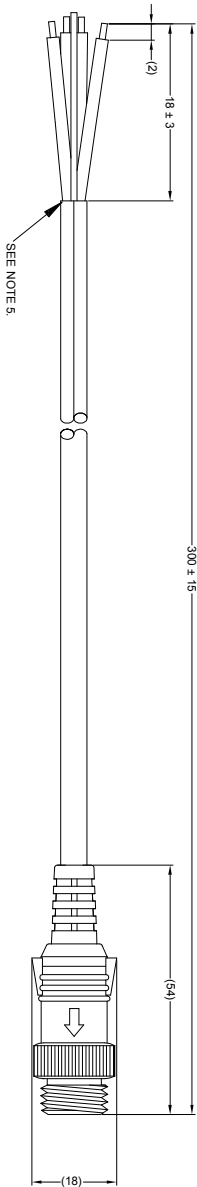

4 PIN MINI DIN FEMALE
MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	RED	+12V
3	BLUE	ADD. FUNCTION
4	WHITE	AUDIO
5	SHIELD	GND

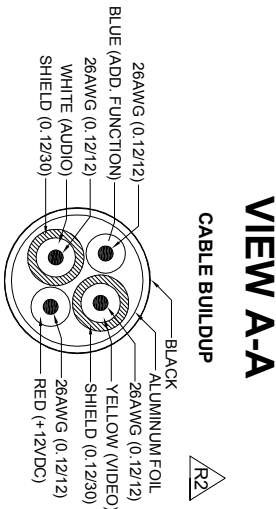

SEE NOTE 5.

TO
CAMERA

NOTES:

- CABLE JOINT IS TO BE MADE WATERPROOF DURING INSTALLATION.
- INTERNAL CABLE CORES MUST BE ONE CONTINUOUS LENGTH.
- INTERNAL CORES **NOT USED** MUST BE ISOLATED.
- STRIPED ENDS MUST BE TINNED WITH SOLDER.
- DO NOT** HEATSHRINK WHERE THE CABLE SPLITS.
- CABLE SHIELDS SHOULD BE TWISTED TOGETHER AND TINNED WITH SOLDER.
- ANY CUSTOMER MODIFICATION OF THIS PRODUCT CAUSING SUBSEQUENT FAILURE IS NOT A LIABILITY OF BRIGADE ELECTRONICS PLC.#
- ALL INTERNAL CABLE CORES ARE 26AWG.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

Revision Notes.

R1 - CHANGED MODE NAME FROM BE-L1003(SG) TO BE-L1003(SM) AND UPDATED FRAME.

AP#:	Drawn:-	Checked:R BUTLER	Approved: S MATTHEWS	Date: 31/07/13	
R2	PINOUT TABLE UPDATED, CABLE BUILDUP ADDED AS PER ECR CR-A204.				
AP#:	TICHOI	Drawn: RBATES	Checked: B CHILDS	Approved: GPLTH	Date: 24/04/14

BRIGADE
www.brigade-electronics.com

Assembly PI Approval T:CHOI - 16/01/13		Approved by	Checked by	Drawn by MBUTLER
Angle of Projection		Units mm	Scale N/A	Released 00/00/00
Third Angle		Status RELEASED	BE-L1003(SM)	
Part No #3576		BE-001378-02-10		