



Revision Notes.				
R1 -				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -

EXAMPLE LABELS



LABEL FOR REFERENCE ONLY

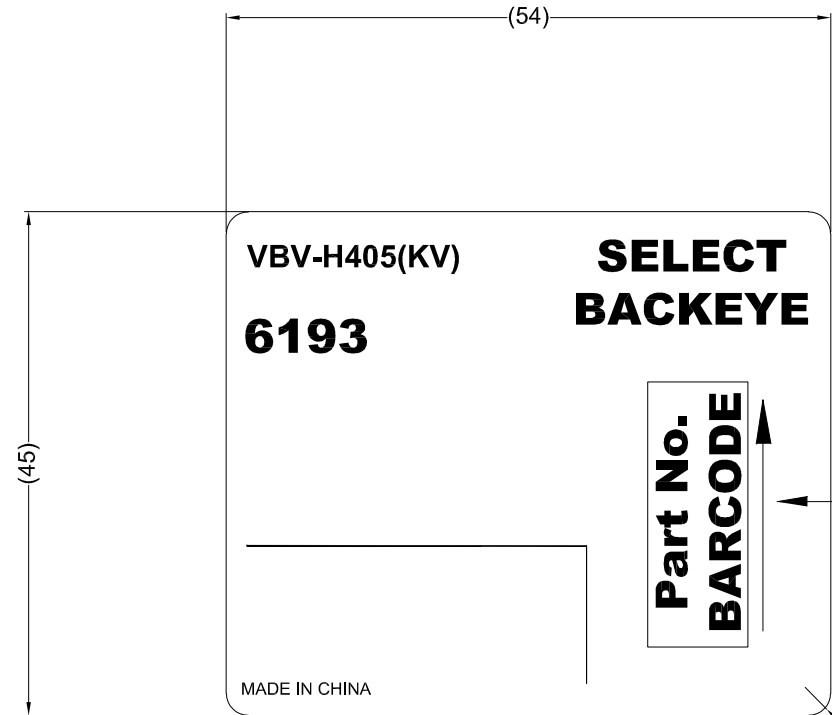

BOX FOR LOCATION REFERENCE ONLY, DO NOT PRINT.


4 x(R2.00)

BARCODE SPECIFICATION:
CODE: 128 STANDARD
DENSITY: 0.363 CHARS/CM
X DIMENSION: 0.25 MM
CODE SET: AUTO

- NOTES:
- 1. INK SHOULD BE PERMANENT BLACK.
 - 2. LABEL SHOULD BE WHITE.
 - 3. FONT TO BE ALWAYS "ARIAL".
 - 4. REFER TO BARCODE SPECIFICATIONS FOR BARCODES.
 - 5. FONT SIZES CAN BE SHRUNK TO FIT THE TEXT IN TO THE SPACE.
 - 6. ALL PRINTED PRODUCT APPROVALS MUST HAVE VALID CERTIFICATION PREFERABLY IN BRIGADES NAME.

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
www.brigade-electronics.com

Assembly Pl Approval J. GREEN		Approved by R. PENTLEY		Checked by J. TYRRELL		Drawn by A. FOSTER	
Angle of Projection  Third Angle		Units mm	Scale N/A	Released 10/11/20		Assembly Ref -	
		Status RELEASED		VBV-H405(KV) GB-LBL			
		Part No N/A		BE-004389-00-20			