


# Product Specification

Brigade Model Number: BE-201C

Brigade Stock Code: #2086A

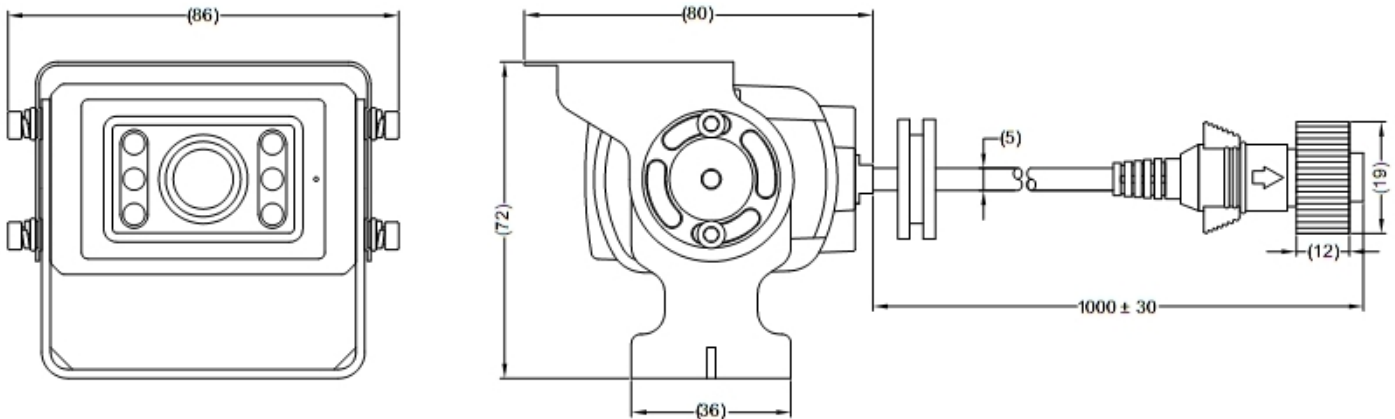

Dimensions: mm

## Product Specification

### Environmental Specifications:

- Shock Rating: 100 G
- Vibration Rating: 20 G
- Camera IP Rating: IP68
- Connector IP Rating: IP67
- Operating Temperature: -30° to +80°C
- Storage Temperature: -40° to +90°C

### Approved Standards:

- CE
- RoHS
- WEEE
- HALT
- ISO 20653: 2006 (IP Testing)

### Technical Specifications:

- Operating Voltage: 12 Vdc
- Current Consumption: ≤200mA
- Power Consumption: ≤2.4 Watts
- Imaging Devices: CCD - 1/3" SHARP  
DSP - SHARP
- TV System: NTSC
- Picture Elements: 512 (H) x 492(V)
- Visual Resolution: 380 TV Lines
- Signal to Noise Ratio: TBD
- Required Illumination: 0 Lux (IR LED's ON)
- Illumination Distance: 5 Meters

### Technical Specifications Continued...

- Video Output: 1.0 Vp-p / 75Ω
- Viewing Angle: 108° (H), 75° (V), 146° (D)
- Weight: Approx. 350 Grams
- Length of Cable: 1000mm ± 30
- Overall Dimensions: 86mm (W) x 80mm (D) x 72mm (H)
- Casing Material: Die cast Aluminium
- View: Mirror/Normal
- Finish: Black Sand Coating

### Features:

- Back Light Compensation
- Automatic White Balance
- Automatic IRIS
- 6x High Power Infrared LEDs
- Integrated Heater (<+10°C)
- BE Type Connector
- High Quality SHARP CCD & DSP

### Package Contents:

- 1 x (BE-201C-C) Camera
- 1 x (BE-X0XC-BKT) Bracket
- 1 x (BE-X0XC-SS) Sunshield
- 1 x (BE-2XXC-FIX) Fixing Pack
- 1 x (BEX0XC-IG) Instruction Guide