


### VIEW A



### 4 PIN FEMALE MATING FACE


PIN #	WIRE COLOUR	DESCRIPTION
1	THIN RED	+12V
2	BLACK	GND
3	WHITE	AUDIO
4	YELLOW	VIDEO

### VIEW B



### 5 PIN MALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	THIN RED	+12V
2	THICK RED	+12/24V
3	WHITE	AUDIO
4	YELLOW	VIDEO
5	BLACK	GND

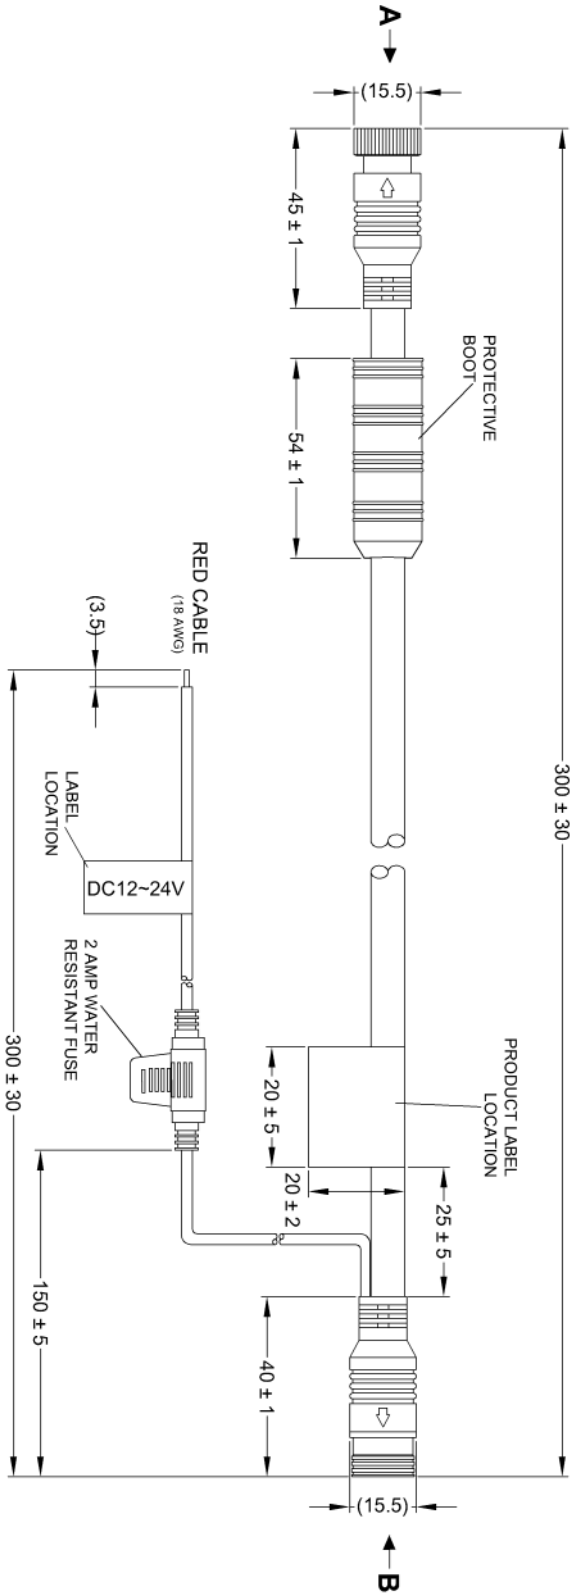

#### NOTES:

1. DIMENSIONS IN MM.
2. ENSURE ARROWS LINE UP WITH LOCATING LUG ON CONNECTOR.
3. CABLE MUST BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS.
4. PROTECTIVE BOOT SHOULD BE WITHIN 100MM OF CONNECTOR "A".
5. ENSURE PROTECTIVE BOOT IS USED IN INSTALLATION.
6. CABLE COLOURS ARE SUBJECT TO CHANGE.
7. CONNECTOR "B" SHOULD BE BROWN.

PROPRIETARY NOTICE  
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS PLC AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATE BY OTHERS EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS PLC.

Rev/No	Revision note	Date	Signature	Checked
1.	TYPE OF FUSE CHANGED.	31/03/'11	DK	MB
2.	VIEW 'A' PIN OUT UPDATED.	05/05/'11	DK	MB

ASSEMBLY PLANT REF: #348-3

Item/rel	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Designed by JHEVHAN		Checked by MBUTLER	Date 22/03/2011
		Approved by - DKERAM	Scale N/A
<b>BRIGADE ELECTRONICS</b>		<b>AC-035 (#3702)</b>	
		Edition A	
		Sheet 1/1	