


## MONITOR - BE-455M

### Features:

- Two camera inputs
- Integral speaker with volume control
- Automatic "screen on" when reversed gear engaged
- Camera one/camera two selector button
- Mirror and normal switch
- 5G shock resistance
- Brightness control
- Night time dim switch
- Contrast control
- Sun shield (clip-on)

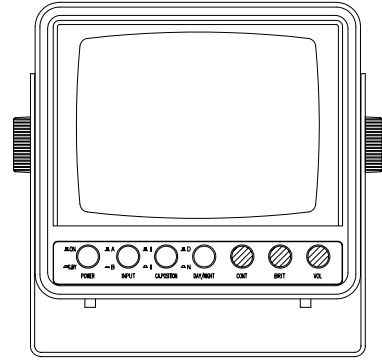


### Specification:

- Picture Tube: 5.5" Monochrome screen
- Viewing angle: 90° degrees(V), 110° degrees(H)
- Power source: 11-30vdc
- Current consumption: 1.5 ampers
- Sensitivity: 0.1 lux
- Power consumption: 12W maximum
- TV System: CCIR
- Picture image: Factory preset to reverse image
- Operating temperature: -20° to +55°C
- Weight: 1.96 kg (including mounting bracket)
- Dimensions: (WxHxD)mm: 154 x 140 x 190.5

## CAMERA - BE-455C

### Features:

- 10G shock resistance
- Integral microphone
- Extra-wide field of view
- Waterproof (IP67)

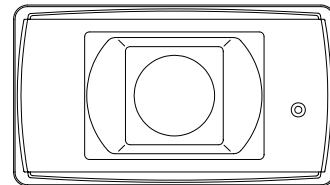

### Specification:

- Power source: 12 vdc (from monitor)
- Field of view: 110° horizontal, 90° vertical
- Pick-up element: 1/3" CCD, 270,000 pixels
- Minimum illumination: 0.1 lux
- Power consumption: 1.5 W
- Operating Temperature: -20°C to +50°C
- Weight: 0.23kg
- Dimensions: 68 x 38.2 x 51

## CABLE

CMC-20 20m Camera Cable

REVISIONS				PROPRIETARY NOTICE		BRIGADE ELECTRONICS PLC			
REV	DESCRIPTION	DATE	APPROVED	THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS PLC, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS PLC.		BE-455 FULL SYSTEMS			
A	RELEASED	20/02/04	D.KERAI			SIZE	STOCK CODE:	DWG NO BE-SP-00006-00-04	REV A
						SHEET 1 OF 1			