


Product Specification

Brigade Model Number: **BE-856GM Monitor**
 Brigade Stock Code: **BE-856GM (#3756)**

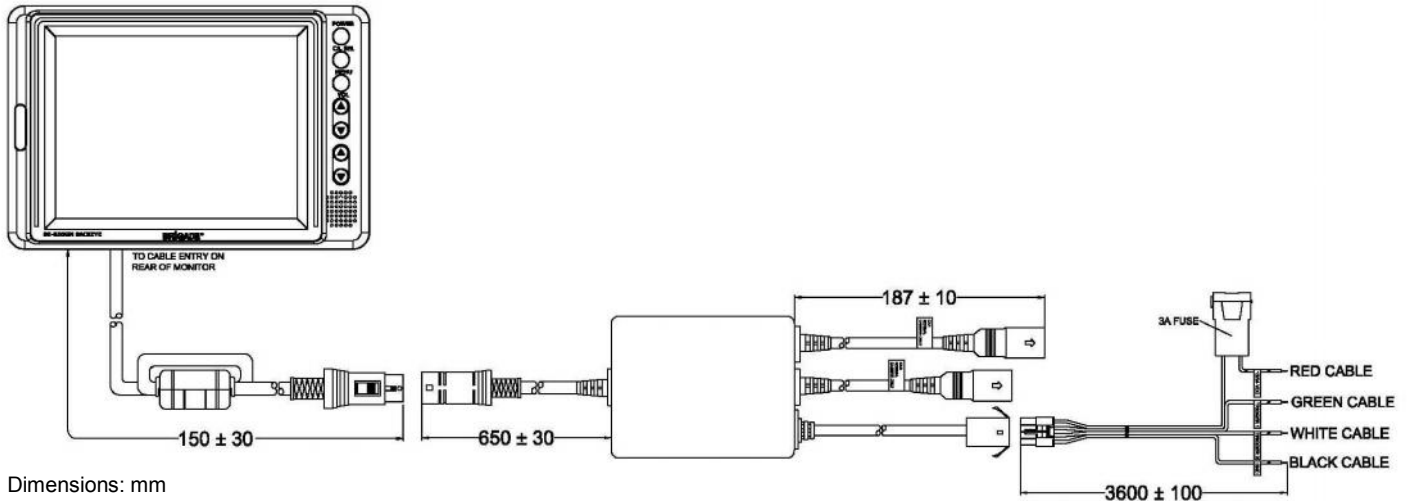

Dimensions: mm

Product Specification

Environmental Specifications:

- Shock Rating: 50 G
- Vibration Rating: 10 G
- Monitor IP Rating: N/A
- Connector IP Rating: N/A
- Operating Temperature: -40° to +70°C
- Storage Temperature: -40° to +80°C

Approved Standards:

- CE
- FCC
- RoHS
- WEEE
- 2006/28/EC
- ISO 13766:2006
- ISO 16750
- HALT
- E-Mark Regulation 10 Revision 04

Technical Specifications:

- Operating Voltage: 10~32 Vdc
- Current Consumption: ≤ 0.9A @ 12 Vdc
- Power Consumption: ≤ 11 Watts @ 12Vdc
- TV System: PAL / NTSC
- Panel Size: 5.6"
- Resolution: 640 x (RGB) x 480
- Contrast Ratio: 500:1
- Brightness: 350 cd/m²
- Viewing Angle: 50(T), 70(B), 70(L), 70(R)
- Number of Video Inputs: 2 Camera
- Number of Triggers In: 2
- Number of Triggers Out: None
- Shutter Function on Channels: None
- Tilt Function on Channels: None

Technical Specifications Continued...

- Cable Thickness:
 - Power Cables: 18 AWG
 - Trigger Cables: 18 AWG
- Speaker: 8Ω @ 0.2 Watts
- Weight: Approx. 500 Grams
- Video Input: 1.0 Vp-p / 75Ω
- Length of Cable:
 - Monitor Pigtail: 150mm
 - Cable Adapter: 900mm
 - Power Cable: 3600mm
- Overall Dimensions: (Without Sunshield)
 - 172mm (W) x 32mm (D) x 114.5mm (H)
- Casing Material: ABS XR401
- Colour: Dark Grey Spray

Features:

- Auto Daylight/Night Sensor
- 2 x Camera Inputs
- On Screen Display Menu (OSD)
- Backlit Control Buttons
- Built in speaker
- Electronic Distance Markers (Including Vertical Line)
- 1x Universal Mounting Bracket
- High resolution digital LCD panel
- LED Backlight (Up to 20,000 hours)
- 6 different OSD language options

Package Contents:

- 1x Monitor
- 1x Instruction Guide
- 1x Bracket & Screws
- 1x Sunshield
- 1x Cable Adapter
- 1x Power Cable

