



Revision Notes.		
1. FUSE CHANGED FROM 7.5A TO 5A.		
Checked By: MB	Approved By: DK	Date Released: 04/05/12

VIEW A



8-PIN MOLEX MALE MATING FACE

PIN#	COLOUR	DESCRIPTION
1	RED	12/24VDC
2	GREEN	TRIGGER 1
3	WHITE	TRIGGER 2
4	BROWN	TRIGGER 5
5	BLACK	GROUND
6	YELLOW	TRIGGER 4
7	BLUE	TRIGGER 3
8	ORANGE	SPEED PULSE

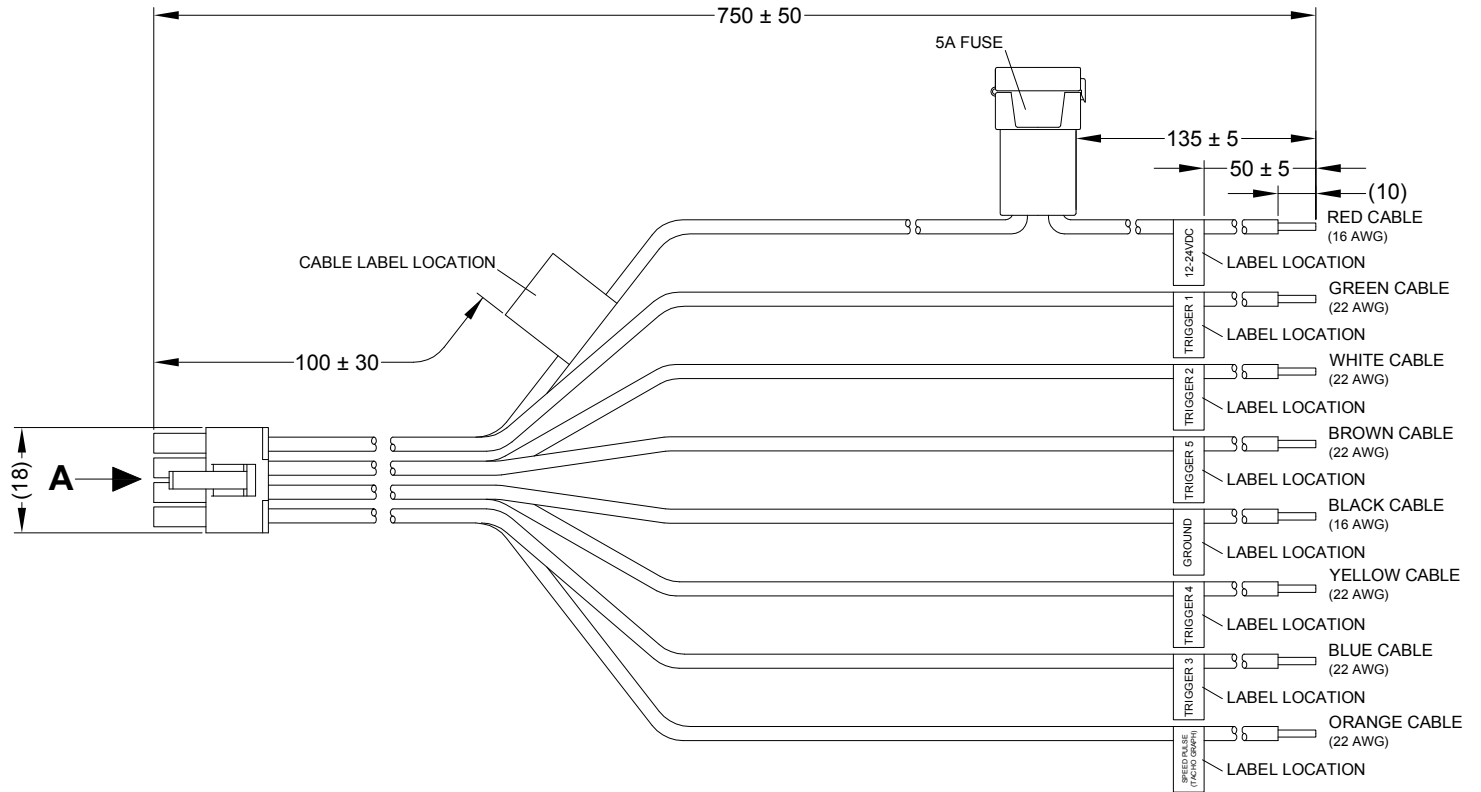

NOTES:

- CONNECTOR SPECIFICATION:
 HOUSING PART No#: 5557 - 08R
 TERMINAL PART No#: 5556T
 WAFER PART No#: 5569 - 08A1
- CABLE TO BE SUPPLIED COILED NEATLY AND HELD TOGETHER WITH A TWIST TIE.
- LABEL FONTS SHOULD BE ARIAL.
- LABEL INK SHOULD BE PERMANENT BLACK.
- FOR CABLE LABEL REFER TO LATEST REVISION OF DRAWING BE-001960-XX-12.

Assembly Pl Approval SHIN JUNG IL - 04/05/12	Approved by D.KERAI	Checked by L.BRAR	Drawn by J.NEWMAN
Angle of Projection 	Units mm	Scale N/A	Released 22/03/12
	Status RELEASED	Assembly Ref 5HN962005	
	Stock Code 3939	BE-865DDM-CA	
		BE-001699-01-11	

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE[®]
 www.brigade-electronics.com