Revision Notes.				
R1 - DISTANCE OF FERRITE FROM MONITOR CHANGED.				
APA: T.CHOI (04/12/13)	Drawn: M.BUTLER	Checked: R.BATES	Approved: B.JOHN	Date: 04/12/13
R2 - MONITOR SOFTWARE UPGRADED TO VERSION "7WEDSB_BG_V2.0.4_150210".				
APA: T.CHOI (05/03/15)	Drawn: M.BUTLER	Checked: R.BATES	Approved: D.WALLIN	Date: 05/03/15

VIEW A



13 PIN FEMALE
MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	THIN PINK	CAM 2 VIDEO
2	THIN SKY BLUE	CAM 2 +12V OUT
3	THIN BROWN	CAM 1 TRIGGER
4	THIN ORANGE	CAM 2 AUDIO
5	THIN YELLOW	CAM 1 VIDEO
6	THIN VIOLET	CAM 1 +12V OUT
7	THIN BLUE	CAM 2 TRIGGER
8	THIN GREEN	CAM 1 AUDIO
9	THIN GREY	CAM 2 ADD. FUNC.
10	LIGHT GREEN	CAM 1 ADD. FUNC.
11	WHITE	GND (SHIELD)
12	BLACK	GND (SHIELD)
13	THICK RED	+12/24V
CASE	SHIELD	GND (SHIELD)

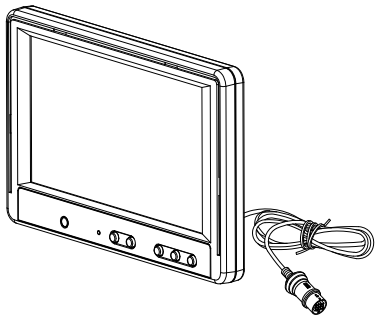

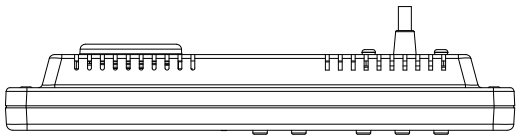

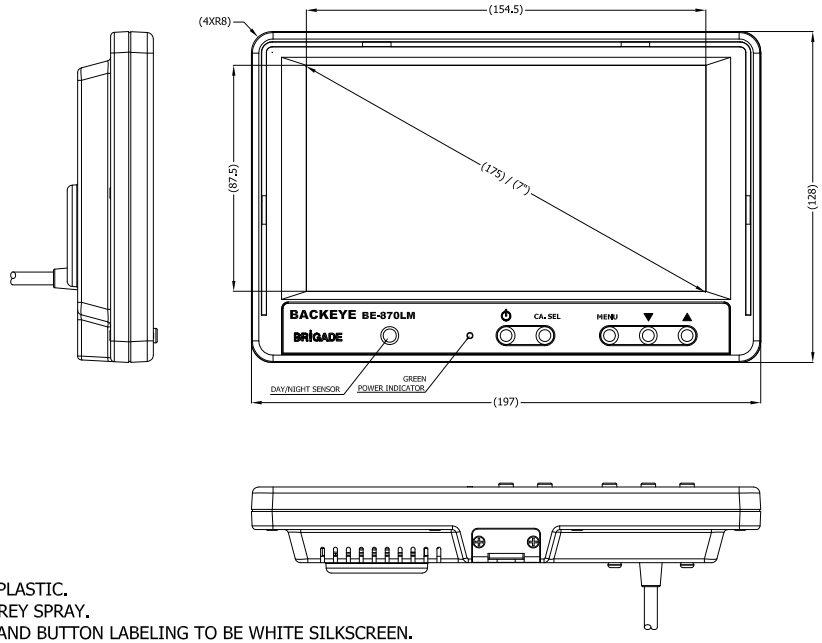

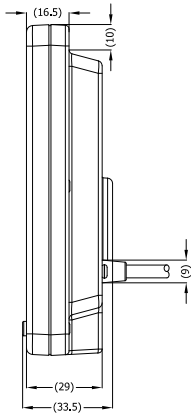

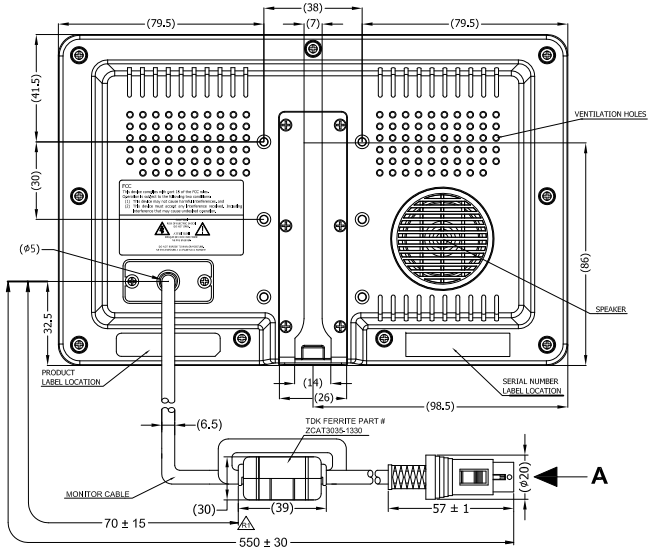

NOTES:
1. MATERIAL: ABS PLASTIC.
2. FINISH: DARK GREY SPRAY.
3. BRIGADE LOGO AND BUTTON LABELING TO BE WHITE SILKSCREEN.
4. REFER TO PRODUCT SPECIFICATIONS FOR MORE DETAILS.
5. THE FONT APPLIED TO THE BUTTONS MUST BE ARIAL FONT AND SIZE 7PT.
6. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002680-00-13.
7. FOR PRODUCT SERIAL NUMBER LABEL REFER TO LATEST REVISION OF DRAWING BE-001655-XX-11.
8. FIRMWARE VERSION "7WEDSB_BG_V2.0.4_150210" TO BE PRELOADED TO THE MONITOR DURING MANUFACTURE.⚠
9. FERRITE SPECIFICATION: 100Ω @ 25MHz, 200Ω @ 100MHz.

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
www.brigade-electronics.com

Assembly PI Approval	Approved by	Checked by	Drawn by
TROY CHOI (07/11/13)	B.JOHN	R.BATES	M.BUTLER

Angle of Projection	Units	Scale	Released	Assembly Ref
Third Angle	mm	N/A	07/11/13	-

Status	
RELEASED	BE-870LM-M
Part No 3142A	BE-002682-02-13

FrameV3