


Revision Notes.				
-				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -


VIEW A

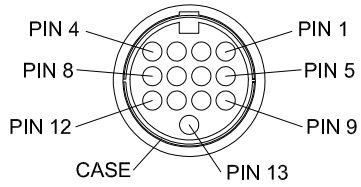

13 PIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	THIN PINK	CAM 2 VIDEO
2	THIN SKY BLUE	CAM 2 +12V OUT
3	THIN BROWN	CAM 1 TRIGGER
4	THIN ORANGE	CAM 2 AUDIO
5	THIN YELLOW	CAM 1 VIDEO
6	THIN VIOLET	CAM 1 +12V OUT
7	THIN BLUE	CAM 2 TRIGGER
8	THIN GREEN	CAM 1 AUDIO
9	THIN GREY	CAM 2 ADD. FUNC.
10	THIN L. GREEN	CAM 1 ADD. FUNC.
11	THIN WHITE	GND
12	BLACK / SHIELD	GND (SHIELD)
13	THICK RED	+12/24VDC
CASE	BLACK / SHIELD	GND (SHIELD)

VIEW B

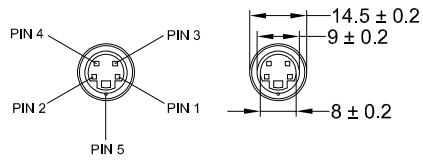


4 PIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	RED	12VDC
3	BLUE	ADD. FUNCTION
4	WHITE	AUDIO
CASE	SHIELD	GROUND

CHANGES FROM BASE PRODUCT BE-870LM-CA (3143B) TO BE-870LM-CA(NPL) (6003)

CHANGE: 1. BE-870LM-CA CBL-LBL REPLACED WITH BE-870LM-CA(NPL) CBL-LBL.
 OPERATION: 1. SAME AS BASE PRODUCT.

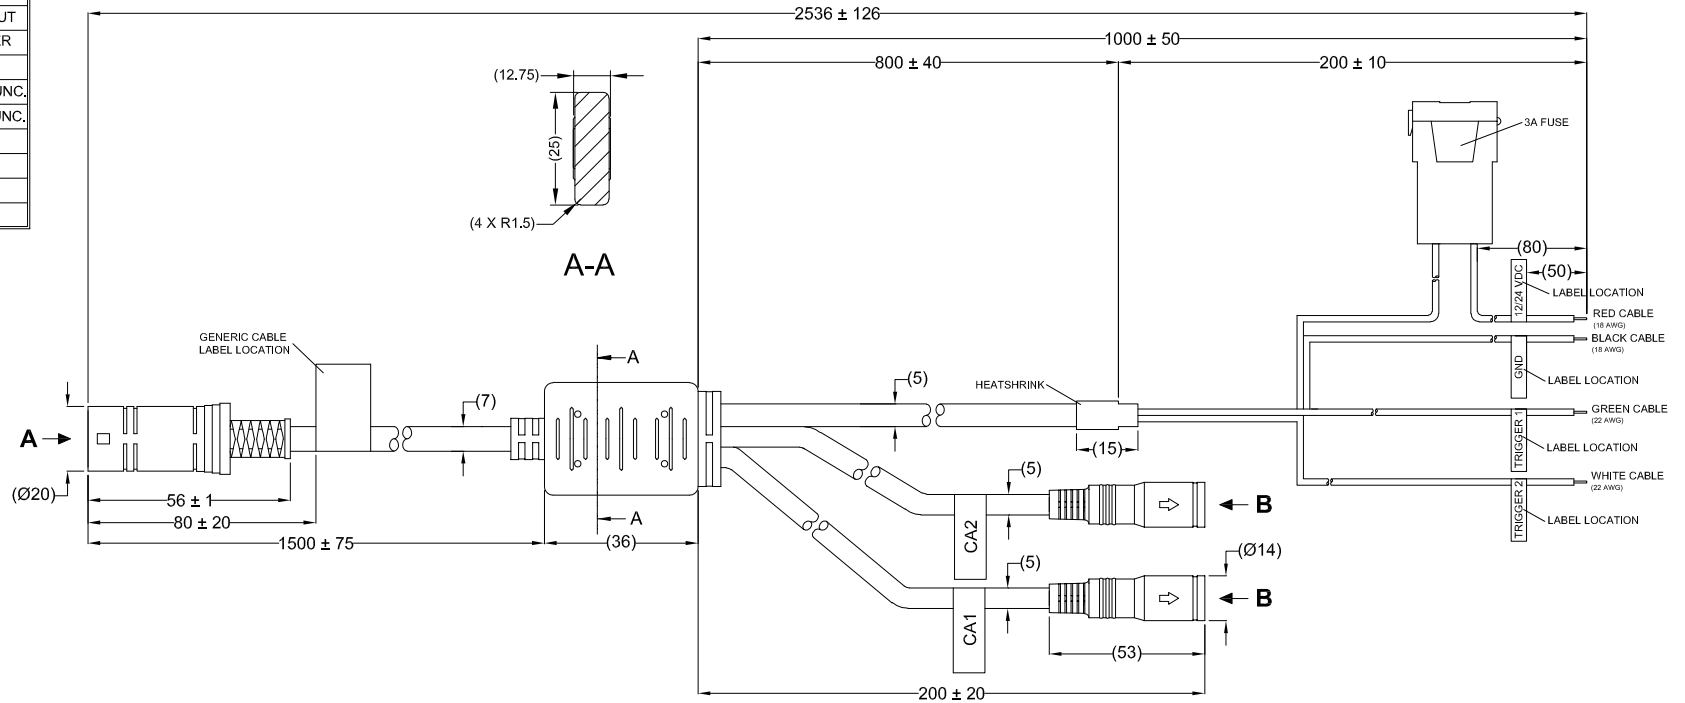

NOTES:

1. ACTUAL FUSE HOLDER MAY VARY ALTHOUGH SPECIFICATION MUST REMAIN THE SAME.
2. CABLE IDENTIFICATION LABELS MUST BE SILVER WITH BLACK INK AND CONTAINS DETAILS SPECIFIED ON THIS DRAWING.
3. FONT SIZES CAN BE SHRUNK TO FIT THE TEXT INTO THE SPACE.
4. CABLE LABEL TO BE FOLDED IN HALF AROUND CABLE IN THE POSITION SPECIFIED ON THE DRAWING.
5. ENSURE ARROWS LINE UP WITH LOCATING LUG ON CONNECTOR.
6. FOR PRODUCT LABEL AND PACKAGING DETAILS REFER TO MASTER BOM.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
www.brigade-electronics.com

Assembly Pl Approval T. CHOI	Approved by B. CHILDS	Checked by J. TYRRELL	Drawn by A. FOSTER
Angle of Projection 	Units mm	Scale N/A	Released 17/12/19
	Status RELEASED	BE-870LM-CA(NPL)	
	Part No 6003	BE-004273-00-19	