




| | | | | |
|--|--------------|----------------------|--------------------|----------------|
| Revision Notes | | | | |
| R1 - Updated power cable label detail as per ECR CR-A572 | | | | |
| APA: Y.ZHANG | Drawn:SLAVER | Checked:D.RICHARDSON | Approved:R.PENTLEY | Date: 21/11/17 |

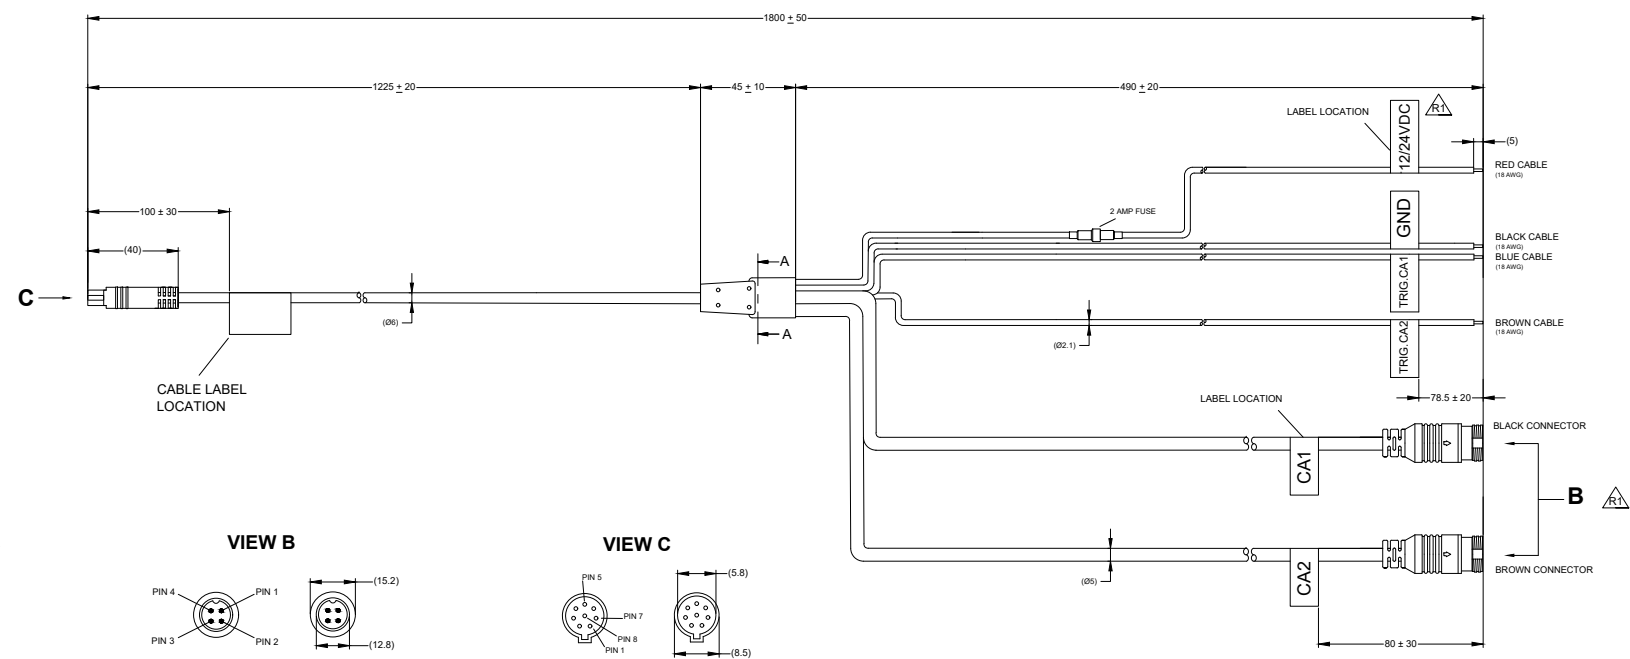

VIEW A-A




VIEW B



| PIN | WIRE COLOUR | DESCRIPTION |
|-----|-------------|-------------|
| 1 | RED | POWER |
| 2 | BLACK | GND |
| 3 | WHITE | N/A |
| 4 | YELLOW | VIDEO |

VIEW C



| PIN | WIRE COLOUR | DESCRIPTION |
|-----|-------------|-------------|
| 1 | BLACK | GND |
| 2 | RED | POWER |
| 3 | BROWN | TRIGGER 2 |
| 4 | WHITE | CA2 POWER |
| 5 | YELLOW | CA2 VIDEO |
| 6 | GREEN | CA1 POWER |
| 7 | BLUE | TRIGGER 1 |
| 8 | GREY | CA1 VIDEO |

- NOTES:
1. ENSURE ARROWS LINE UP WITH LOCATING LUG ON CONNECTOR.
 2. FOR CABLE LABEL DETAILS REFER TO MASTER BOM.
 3. FUSE HOLDER FITTED WITH 2A FUSE.
 4. BARE ENDS TO BE STRIPPED, TWISD AND TINNED TO 5MM.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



| | | | |
|--|-----------------------|-------------------------------|----------------------|
| Assembly Pl Approval Y.ZHANG 15/06/17 | Approved by B.JOHN | Checked by R.BATES | Drawn by S.LAVER |
| Angle of Projection Third Angle | Units mm | Scale N/A | Released 22/06/17 |
| | Status RELEASED | Assembly Ref - VBV-243M-CA | |
| | Part No 5325 | BE-003704-01-17 | |