


VIEW A



VIEW B



VIEW C



VIEW D



VIEW E



PS#	WIRE COLOR	DESCRIPTION
1	RED	1-10-3200C
2	BROWN/WHITE	TRIGGER 2
3	YELLOW/WHITE	TRIGGER 5
4	L.PINK/BLACK	TRIGGER 5
5	BLACK	CALC/CA 1-200C
6	WHITE	CA 1-200C
7	BLUE/WHITE	TRIGGER 1
8	ORANGE/BLACK	TRIGGER 4
9	PINK/BLACK	CA AND FUNCTION
10	GREEN/BLACK	CALC AND TRIGGER
11	CORNER	ALV GROUND OUT
12	PURPLE/WHITE	SPEED PULSE
13	BLUE/BLACK	CA 1-200C
14	GREEN/BLACK	NO CONNECTION
15	GREEN/BLACK	TRIGGER 3
16	RED (SHIELD)	CA ALVIO
17	BROWN (SHIELD)	CA ALVIO
18	BLUE (SHIELD)	CA ALVIO
19	YELLOW (SHIELD)	CA ALVIO
20	ORANGE (SHIELD)	CA ALVIO
21	WHITE (SHIELD)	CALVARD
22	GRAY (SHIELD)	CALVARD
23	BLACK (SHIELD)	CA ALVIO
24	GRAY (SHIELD)	CA ALVIO
25	BLACK (SHIELD)	ALV ALVIO IN
26	CASINO (SHIELD)	GROUND

PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	RED	+5VZ
3	BLUE	ADD. FUNCTION
4	WHITE	AUDIO
5	SHIELD	GND

PA#	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	RED	*12V
3	BLUE	N/C
4	WHITE	AUDIO
5	SHIELD	END

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	VIDEO OUT SIGNAL
2	SHIELD	GROUND

PIN #	WIRE COLOUR	DESCRIPTION
1	WHITE	AUDIO IN SIGNAL
2	SHIELD	GROUND

VIEW F





PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO IN SIGNAL
2	SHIELD	GROUND

NOTES:


1. ACTUAL FUSE HOLDER MAY VARY ALTHOUGH SPECIFICATION MUST REMAIN THE SAME.
2. FOR CABLE LABEL REFER TO GENERIC CABLE LABEL DRAWING BE-001960-XX-12.
3. INDUCTOR CHOKE COIL 1.2mh TO BE PRE MOULDED ONTO POWER CABLE.
4. CABLE IDENTIFICATION LABELS MUST BE SILVER WITH BLACK INK AND CONTAINS DETAILS SPECIFIED ON THIS DRAWING.
5. FONT SIZES CAN BE SHRUNK TO FIT THE TEXT INTO THE SPACE.
6. CABLE LABEL TO BE FOLDED IN HALF AROUND CABLE IN THE POSITION SPECIFIED ON THE DRAWING.
7. ANY CUSTOMER MODIFICATION OF THIS PRODUCT CAUSING SUBSEQUENT FAILURE IS NOT A LIABILITY OF BRIGADE ELECTRONICS PLC.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

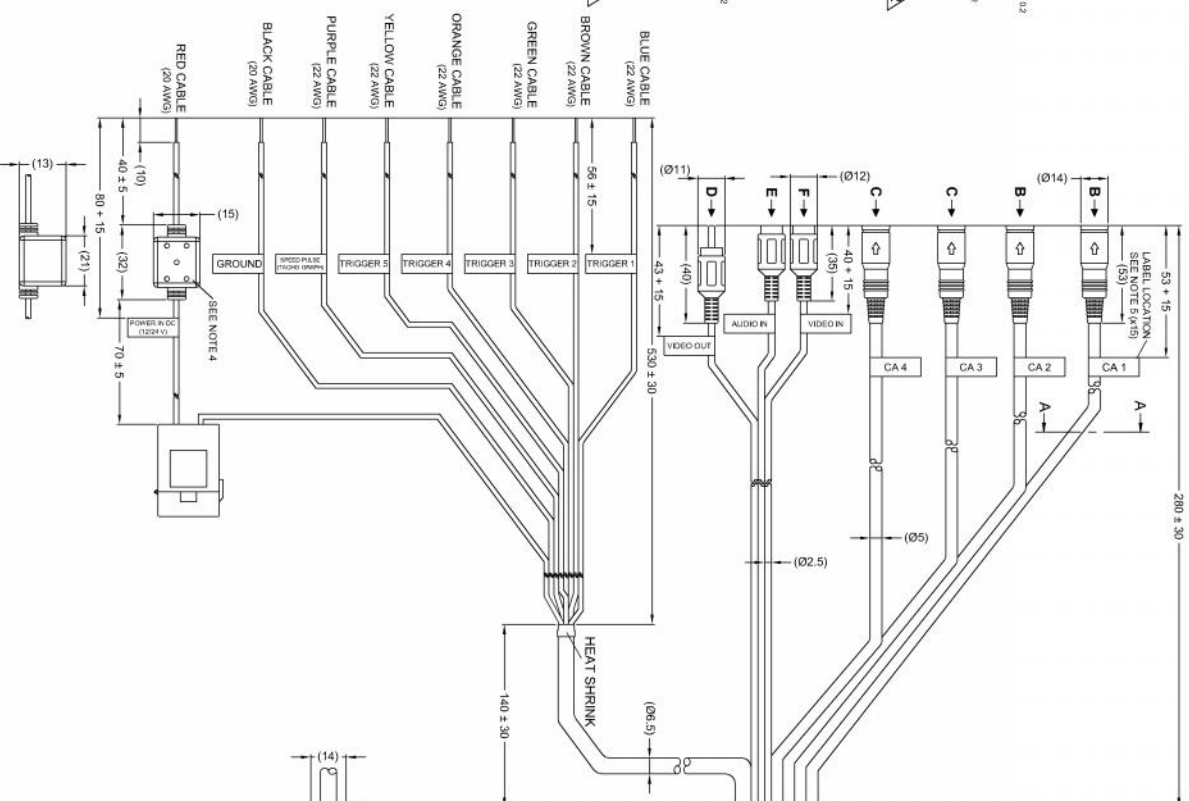

VIEW A-A

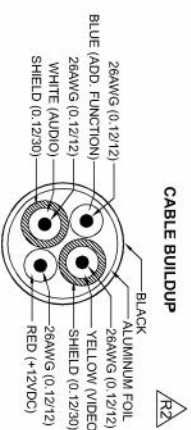

Revision Notes:			
R1 - CABLE TOLERANCES UPDATED, NOTES REVISED, VIEW D & E REVISED, VIEW F ADDED.			
APAs -	Drawn:-	Checked:R.CHILDS	Approved: S.MATTHEWS Date: 20/11/12
R2 - VIEW B AND C PINPOINTS UPDATED, CABLE BUILDUP ADDED, AS PER EIR CR-A204.			
APAs - T.CHOI	Drawn: R.BATES	Checked: R.CHILDS	Approved: G.LUTHI Date: 24/04/14

BRIGADE®
www.brigade-electronics.com

Assembly 1st Approval T.CHOI 22/11/12	Approved by S.MATTHEWS	Checked by B.CHILDS	Drawn by M.BUTLER
Units mm	Scale N/A	Released 21/11/12	Assembly Ref SHN065LIP
Angle of Projection 	Status RELEASED	BE-970WFM-CA	
Third Angle 	Part No 4086	BE-001898-02-12	