




VIEW A



VIEW B



VIEW C



VIEW D



YELLOW PHONO MALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	VIDEO OUT SIGNAL
2	SHIELD	GROUND

VIEW E



WHITE PHONO FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	WHITE	AUDIO IN SIGNAL
2	SHIELD	GROUND

VIEW F



YELLOW PHONO FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO IN SIGNAL
2	SHIELD	GROUND

25 PIN DIN FEMALE MATING FACE


PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+10-32VDC
2	BROWN/WHITE	TRIGGER 2
3	YELLOW/BLACK	TRIGGER 5
4	L-PURPLE/BLACK	CA4/CA3 +12VDC
5	BLACK	GROUND
6	WHITE	CA2 +12VDC
7	BLUE/WHITE	TRIGGER 1
8	ORANGE/BLACK	TRIGGER 4
9	PINK/BLACK	CA1 ADD. FUNCTION
10	L-GREEN/BLACK	CA2 ADD. FUNCTION
11	ORANGE	AUX VIDEO OUT
12	PURPLE/WHITE	SPEED PULSE
13	L-BLUE/BLACK	CA1 +12VDC
14	GRAY/BLACK	NO CONNECTION
15	GREEN/BLACK	TRIGGER 3
16	RED (SHIELD)	CA3 AUDIO
17	BROWN (SHIELD)	CA2 VIDEO
18	BLUE (SHIELD)	CA2 AUDIO
19	L-GREEN (SHIELD)	CA1 VIDEO
20	PURPLE (SHIELD)	CA1 AUDIO
21	WHITE (SHIELD)	CA3 VIDEO
22	GRAY (SHIELD)	CA4 VIDEO
23	GREEN (SHIELD)	CA4 AUDIO
24	BLACK (SHIELD)	AUX AUDIO IN
25	YELLOW (SHIELD)	AUX VIDEO IN
26	CASING (SHIELD)	GROUND

4 PIN MINI DIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	RED	+12V
3	BLUE	ADD. FUNCTION
4	WHITE	AUDIO
5	SHIELD	GND

4 PIN MINI DIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	RED	+12V
3	BLUE	N/C
4	WHITE	AUDIO
5	SHIELD	GND


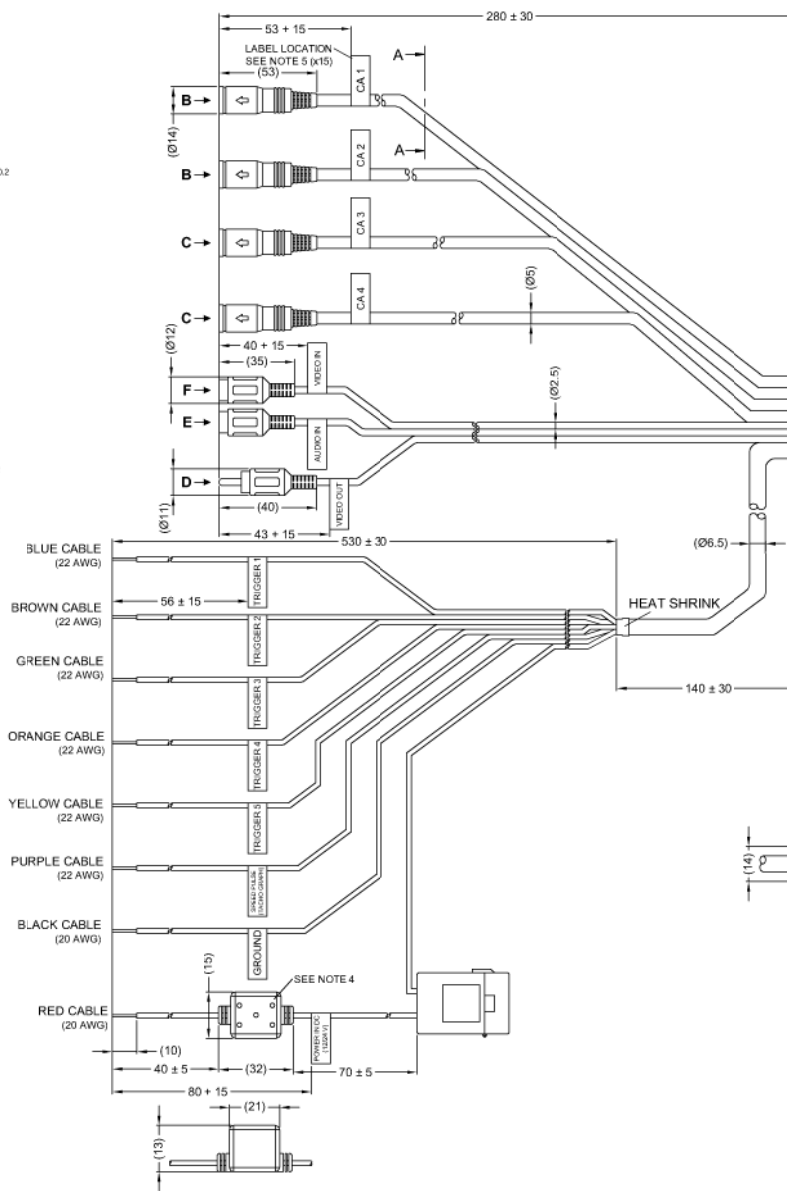


Revision Notes.

APA: -	Drawn: -	Checked: -	Approved: -	Date: -
--------	----------	------------	-------------	---------


CHANGES FROM BASE PRODUCT BE-970WFM-CA (4086) TO BE-970WFM-CA(NPL) (6011)

CHANGE: 1. BE-970WFM-CA CBL-LBL REPLACED WITH BE-970WFM-CA(NPL) CBL-LBL.
OPERATION: 1. SAME AS BASE PRODUCT.

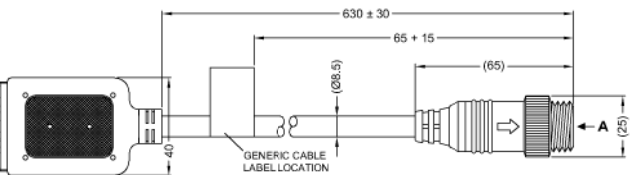

VIEW A-A

CABLE BUILDUP

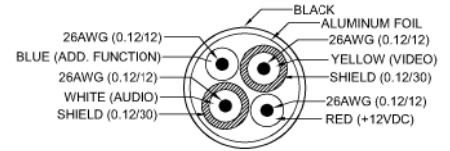

- NOTES:
1. ACTUAL FUSE HOLDER MAY VARY ALTHOUGH SPECIFICATION MUST REMAIN THE SAME.
 2. CONNECTOR GUIDES MUST LINE UP WITH ARROW.
 3. INDUCTOR CHOKE COL 1.2mH TO BE PRE MOULDED ONTO POWER CABLE.
 4. CABLE IDENTIFICATION LABELS MUST BE SILVER WITH BLACK INK AND CONTAINS DETAILS SPECIFIED ON THIS DRAWING.
 5. FONT SIZES CAN BE SHRUNK TO FIT THE TEXT INTO THE SPACE.
 6. CABLE LABEL TO BE FOLDED IN HALF AROUND CABLE IN THE POSITION SPECIFIED ON THE DRAWING.
 7. FOR PRODUCT LABEL AND PACKAGING DETAILS REFER TO MASTER BOM.

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS. AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly Pl Approval T. CHOI	Approved by B. CHILDS	Checked by J. TYRRELL	Drawn by A. FOSTER
Angle of Projection 	Units mm	Scale N/A	Released 17/12/19
Status RELEASED	BE-970WFM-CA(NPL)		
Part No 6011	BE-004279-00-19		