


Product Specification

Brigade Model Number: BE-970WM
Brigade Stock Code: (#3351)

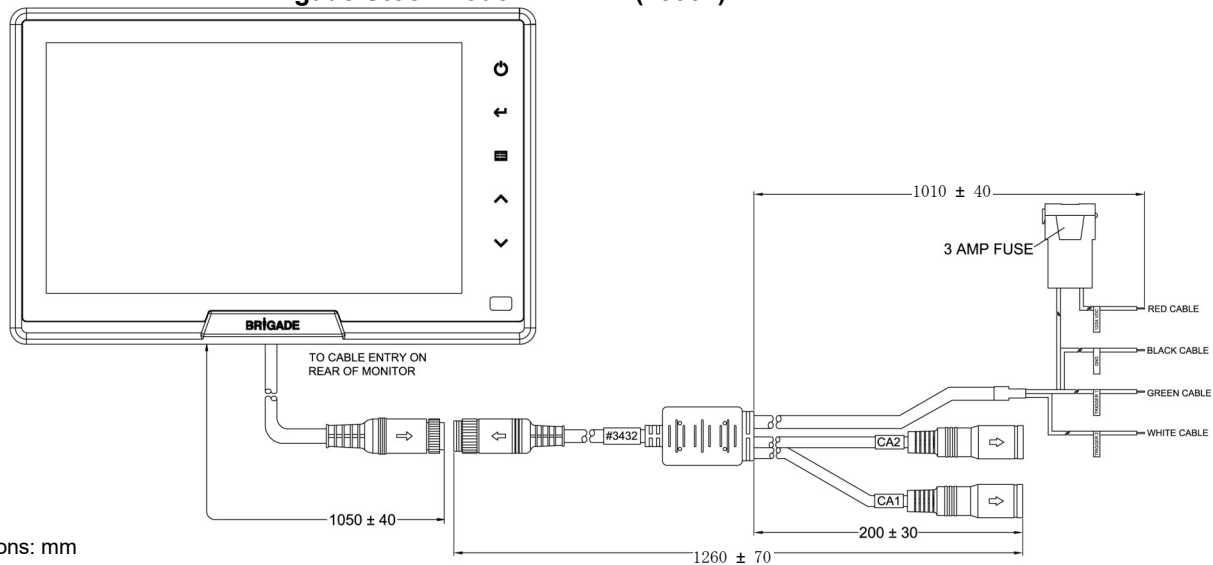

Dimensions: mm

Product Specification

Environmental Specifications:

- Shock Rating: 100G
- Vibration Rating: 20G
- Connector IP Rating: IP69K
- Monitor IP Rating: IP69K
- Operating Temperature: -40° to +70 °C
- Storage Temperature: -40° to +85°C

Approved Standards:

- RoHS
- WEEE
- HALT
- - ISO - 16750 1,2,3,4,5 (Climatic Loads)
- Electro Magnetic Compatibility
 - 'e' Marking - 2009/19/EC
 - 'E' Marking - Reg10 Rev04
 - CE - (EN 61000-6-3:2007+A1:2011+AC:2012)/ (EN 61000-6-1:2019)
 - FCC - ANSI C63,4/2003
 - ISO - 13766 : 2006

Technical Specifications:

- Operating Voltage: 12~24 Vdc
- Current Consumption: MAX 0.9A @ 10 Vdc
- Power Consumption: MAX 11Watts @ 10 Vdc (Auto. Switching)
- TV System: PAL or NTSC
- Digital Panel Size: 7.0" Diagonal
- Resolution: 800 x (RGB) x 480
- Contrast Ratio: 500:1
- Brightness: 500 cd/m²
- Viewing Angle:
 - 50(T), 60(B), 65(L), 65(R)
- Number of Video Inputs: 2 Camera
- Number of Triggers In: 2
- Number of Triggers Out: None
- Shutter Function on Channels: Yes

Technical Specifications Continued...

- Cable Thickness:
 - Power Cables: 18 AWG
 - Trigger Cables: 22 AWG
- Speaker: 8Ω @ 1 Watts
- Weight: 850 Grams
- Video Input: 1.0 Vp-p / 75Ω
- Length of Cable:
 - Monitor Pigtail: 1050 ± 40mm
 - Cable Adapter: 1260 ± 70mm
- Overall Dimensions: (Without Sunshield) 194 mm (W) x 48 mm (D) x 124 mm (H)
- Casing Material: ALDC (Aluminium Die Cast)
- Colour: Dark Grey Finish

Features:

- Single Image Display (16:9)
- High Quality Digital LCD Panel
- Tamperproof/Lock out menus
- On Screen Display Menu (OSD)
- Backlit Control Buttons
- Built in speaker
- 6 x OSD Languages
- Electronic On Screen Markers
 - Distance Marker Setting
 - Vertical Line Marker Setting
- Low Reflection TFT LCD (Anti Glare)
- Capacitive Touch Buttons

Package Contents:

- 1x Monitor
- 1x Cable Adapter
- 1x Sunshield
- 1x Bracket
- 1x Installation Guide
- 1 x Fixing Pack