



 9Vdc - 16Vdc

 -40°C - +70°C

 250g  230g  290g

 71°(H) 42°(V) 82°(D)

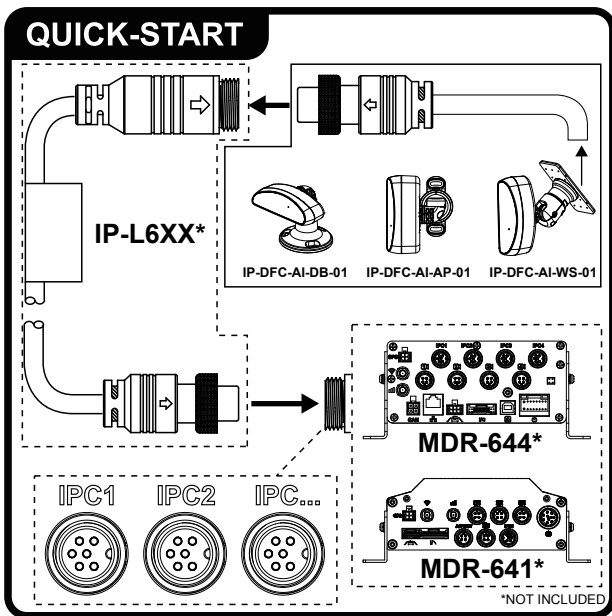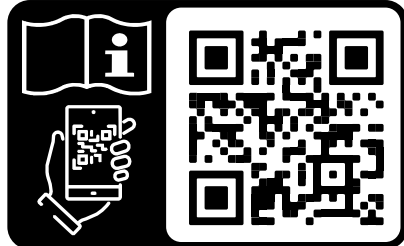

EN For IP-DFC-AI-XX-01 Series setup, refer to the user manual by scanning the QR code.

FR Pour la configuration de l'IP-DFC-AI-XX-01, consultez le manuel d'utilisation en scannant le code QR. *Non inclus.

DE Für die Einrichtung mit der IP-DFC-AI-XX-01, folgen Sie der Betriebsanleitung durch scannen des QR codes. *Niet inbegrepen.

IT Per il setup della IP-DFC-AI-XX-01, si prega di far riferimento al manuale, scansionando il codice QR. *Non incluso.

ES Para la configuración de la IP-DFC-AI-XX-01, consulte el manual del usuario escaneando el código QR. *No incluido.

NL Voor de instellingen in de IP-DFC-AI-XX-01 kunt u de QR code in de handleiding scannen. *Niet inbegrepen.

PT Para a configuração do IP-DFC-AI-XX-01, consulte o manual do usuário digitalizando o código QR. *Não incluído.

RU Для настройки IP-DFC-AI-XX-01 обратитесь к руководству пользователя отсканировав QR-код. *Не входит в комплект.

TR IP-DFC-AI-XX-01 kurulumu için QR kodunu okutarak kullanımlık kılavuzunu indiriniz. *Dahil değildir.

PL W celu podłączenia do IP-DFC-AI-XX-01, proszę zapoznać się z instrukcją, skanując kod QR. *Nie zawiera.