


Product Specification



Brigade Model Number: IP-EM8
Part Number: (5861)

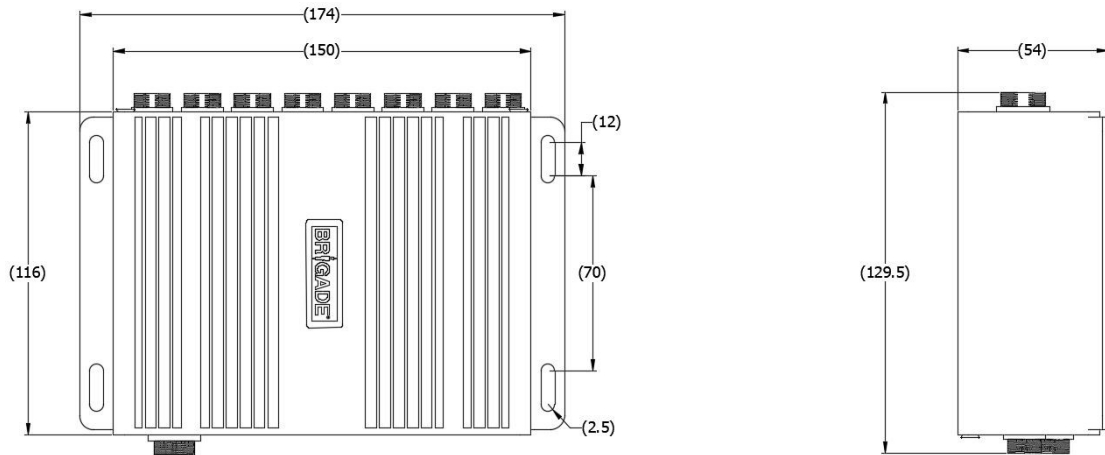

Dimensions: mm

Environmental Specifications:

- Shock Rating: 150G
- Vibration Rating: 2.3G
- PON Switch IP Rating: IP30
- Operating Temperature: -40° to +70°C
- Storage Temperature: -40° to +85°C

Approved Standards:

- CE - (Directive: 2014/30/EU
EN 55032:2012+AC:2013 / EN 55024:2010+A1:2015)
- FCC (47 CFR Part 15 Subpart B)
- Industry Canada (ICES-003)
- E-Mark (ECE Regulation 10 Rev. 05)
- RoHS2
- REACH
- WEEE

Technical Specifications:

- Operating Voltage: 12V dc / 24V dc
- Power Consumption: ≤3 Watts (PON switch only)
- Output Voltage (per channel): 12V dc Nominal
- Output Power (per channel): 7W Max.
- Video Inputs: 8 x IP Cameras
- LAN Port: 1 x 1000M

Technical Specifications Continued...

- Assembled Weight: 1142 Grams
- Overall Dimensions: 174mm(W) x 54mm(H) x 129.5mm(D)
- Housing Material: Aluminium / Cold Rolled Steel / PC
- Finish: Black

Features:

- Expands the capability of the MDR-508 adding up to 8 channels by enabling the use of IP cameras
- VBV Type Female Connector (6-pin)
- Status LED Indicators for power, video inputs and MDR connectivity
- Support of cameras with Power Over Network (PON) via the VBV Type Connector (6-pin) with dedicated power pins. Incompatible with cameras that require Power over Ethernet (PoE)

Package Contents:

- 1 x IP-EM8-SW - 8-Port Switch
- 1 x IP-EC-1 - Ethernet Cable - 1 metre
- 1 x IP-EM-PC - Power Cable
- 1 x IP-EM4/8-IG - Installation Guide

Optional Ancillaries:

- IP-EC-5 - Ethernet Cable - 5 metre