



Revision Notes.				
R1 -				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -

VIEW A

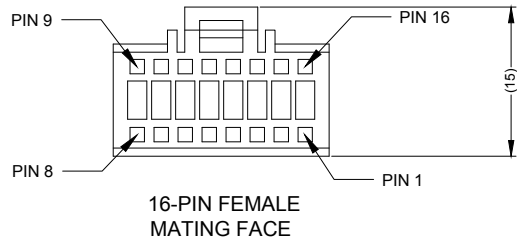

PIN#	COLOUR	DESCRIPTION
1	BLUE	TRIGGER OUTPUT 2
2	RED	TRIGGER INPUT 4
3	N.C	N.C
4	RED	TRIGGER INPUT 1
5	RED	TRIGGER INPUT 2
6	GREEN	SPEED-A
7	GREEN	SPEED-B
8	N.C	N.C
9	YELLOW	12V OUT
10	RED	TRIGGER INPUT 8
11	RED	TRIGGER INPUT 7
12	RED	TRIGGER INPUT 5
13	RED	TRIGGER INPUT 6
14	RED	TRIGGER INPUT 3
15	BLUE	TRIGGER OUTPUT 1
16	BLACK	GND

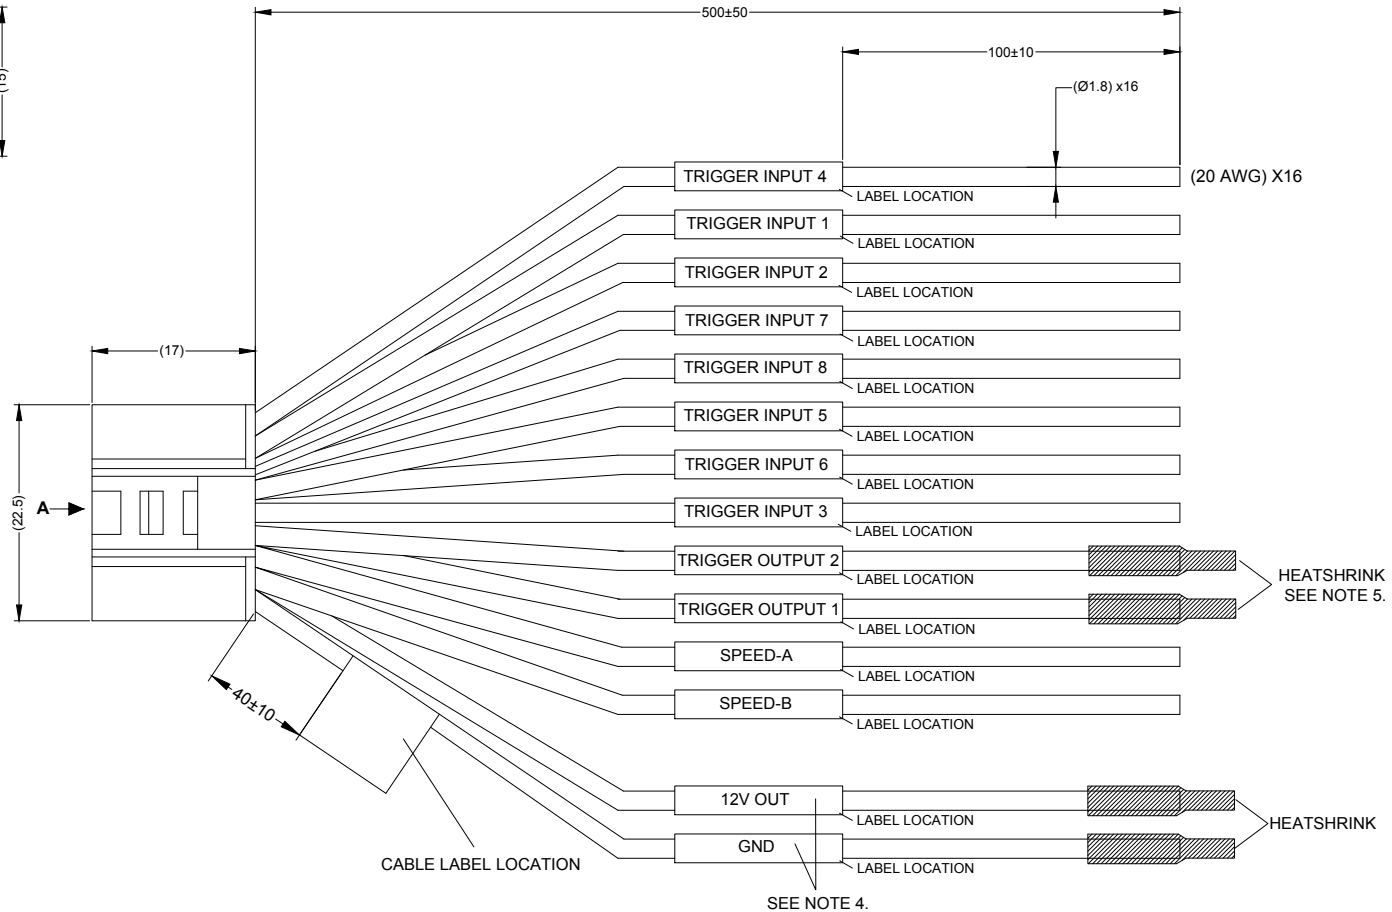

- LABEL SPECIFICATIONS**
1. ALL LABELS SHOULD BE WHITE/SILVER.
 2. ALL INK SHOULD BE BLACK.
 3. ALL TEXT PRINTED SHOULD BE 3MM.

- NOTES:**
1. REFERENCE INSTRUCTION GUIDE FOR FUNCTIONALITY.
 2. ISOLATE CABLES IF NOT USED.
 3. FOR CABLE LABEL REFER TO LATEST REVISION OF DRAWING BE-003113-XX-15.
 4. 12V OUT MAXIMUM LOAD: 12V @ 1A
 5. TRIGGER OUTPUTS MAXIMUM LOAD: 12V @200mA
 6. SUPPLIED WITH TWIST-TIE.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE[®]
 www.brigade-electronics.com

Assembly Pl Approval P.YANG	Approved by B.JOHN	Checked by P.MISSEN	Drawn by L.PILLAY
Angle of Projection 	Units mm	Scale N/A	Released 21/07/15
	Status RELEASED	Assembly Ref MDR-404-TRIG	
	Part No 4881	BE-003101-00-15	