


Product Specification



Brigade Model Number: MDR-MCU-R-01
Brigade Part Number: 7053

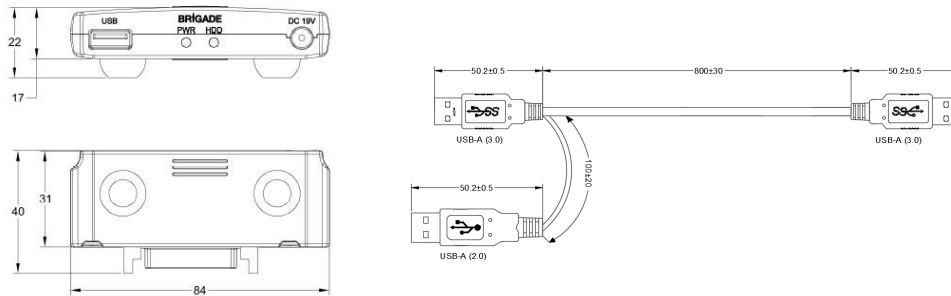

Dimensions: mm

Environmental Specifications:

- IP Rating: IP30
- Operating Temperature: -10° to +50°C

Approved Standards:

- CE - (EN55032:2015+A11:2020; EN55035:2017+A11:2020)
- FCC - (47 CFR Part 15 Subpart B Class B)
- IC - (ICES-003: 2020 Issue 7 Class B)
- RoHS2
- REACH

Technical Specifications:

- Operating Voltage: USB Powered
- Housing Material: Plastic
- Finish: Black
- Packaged Weight: 160g
- Dimensions (without cables): 84mm (W) x 40mm (D) x 22mm (H)

Features:

- Connects Mobile Caddy Unit MDR-641-X-MCU-XXX to PC when using the MDR-Dashboard PC software
- Connects to a USB-A 3.0 connector of a PC
- Second USB-A 2.0 connector needed if the main USB connection cannot supply enough power
- Additional power input (DC 19V) not required for Mobile Caddy Unit MDR-641-X-MCU-XXX
- LED status lights for power & HDD read/write

Package Contents:

- 1 x MDR-MCU-R-01-R MDR MCU Reader only
- 1 x MDR-USB-A-01 MDR USB 3.0 Cable
- 1 x MDR-MCU-R-QS MDR MCU Reader Link Card