


Product Specification

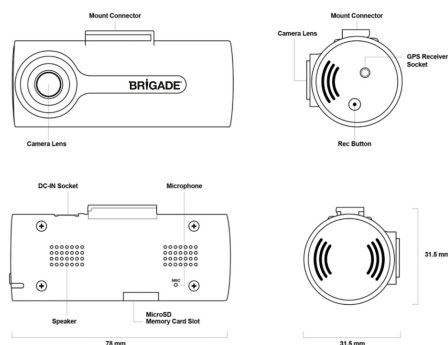

Dimensions: 78 x 34.6 x 31.5 mm

UK/USA/EU/CAN

Model Number: DC-101-000 (6290) UK
(Part Number) DC-101-001 (6560) USA
 DC-101-002 (6558) EU
 DC-001-003 (7030) CAN

Optional accessories
 DC-1XX-LOCK (6296)
 DC-1XX-DPC7 (6323)

Key features	Advanced Video Clear Technology Super Capacitor Integrated Thermal Protection Anti-File Corruption Parking Mode (Motion & Impact Detection)* Safety Camera Alert (Speed Camera, Red Light Camera) * GPS Port for GPS Antenna PC Viewer (Windows & Mac OS) Supports MicroSD Cards up to 64GB *Installation Required	Package contents	1 x DC-101 1 x 16GB MicroSD card and SD Adaptor (UK/USA/CAN) 1 x 64GB MicroSD card and SD Adaptor (EU) 1 x GPS Sensor 1 x 3m Hardwire cable 1 x Windscreen Mount 1 x 3M Sticky pad 3 x 3M cable clips 1 x Quick Start Guide
---------------------	---	-------------------------	---

Dimensions / Weight	78 x 34.6 x 31.5 mm / 42.4g 3.1 x 1.4 x 1.2" / 0.1lb	
Memory	microSD memory card	- UHS-1: 16GB, 32GB, 64GB - Class 10: 8GB
Recording mode	Continuous Rec	Records videos in 1-minute segments
	Incident Rec	Records 10 seconds before and after the incident (total 20 seconds)
	Manual Rec	Records from 10 seconds before and 50 seconds after manually starting the recording (total 1 minute)
	Parking Rec (parking mode)	Requires the hardwiring cable installation
Camera sensor	2.1M Pixel 1/2.7" CMOS 1080P	
Angle of view	Approximately 140°(diagonally)	
Video	FHD (1920 x 1080) / H.264 / file extension: MP4	
Frame rate	Maximum 30 fps	
Audio	PCM (pulse code modulation)	
Acceleration Sensor	Triaxial acceleration sensor (3D, +/-3G)	5 levels of sensitivity adjustment available
GPS	External GPS receiver	Safety driving section alert supported, stereo socket 2.5Ø / quadrupole
Power input	DC 12 /24V supported	
Power consumption	2W (mean) / 14V	Except for the fully charged supercapacitor / GPS
Auxilliary power unit	Super capacitor	
LED Indicator	Status LED	
Key	REC key	Multi-function REC Key - Manual recording (press for 1 second) - Audio recording (press for 3 seconds) - Memory card format (press for 5 seconds)
Alarm	Built-in speakers	Voice guide (buzzer sounds)
Operating temperature	14 to 140°F / -10 to 60°C	
Storage temperature	-4 to 158°F / -20 to 70°C	
Certifications	UKCA, CE, FCC & IC	