Revision Notes.				
R1 – DIMENSION OF CABLE CORRECTED FROM 350 ± 10 TO 315 ± 10 AS PER QI710.				
APA: N.MEHTA	Drawn:R.BATES	Checked:M.POTTER	Approved:D.WALLIN	Date: 24/07/15

VIEW A



MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	12-24VDC
2	BLACK	GROUND

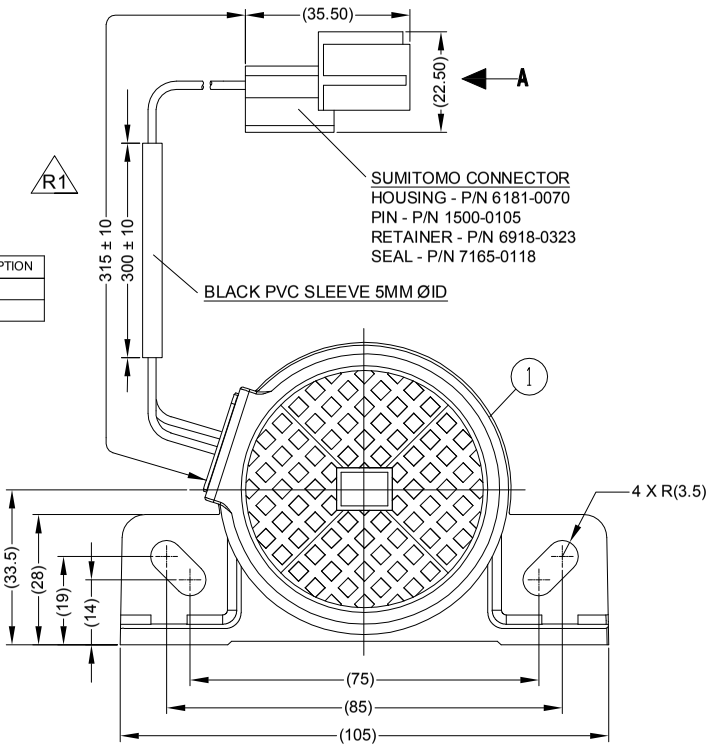

ITEM	STOCK CODE	QTY	DESCRIPTION
1	(N/A)	1	BBS-87 (SC) ALARM ONLY
2	(N/A)	1	FITTING INSTRUCTIONS (NOT SHOWN)

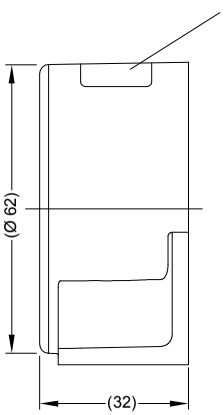

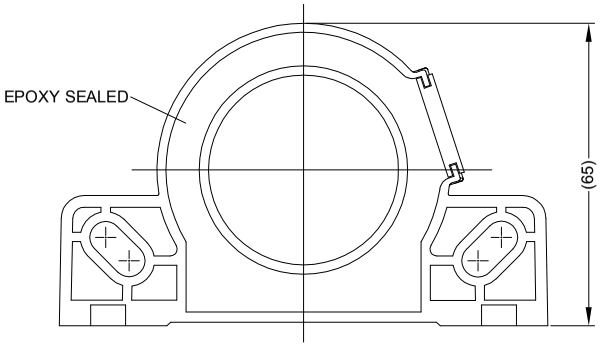

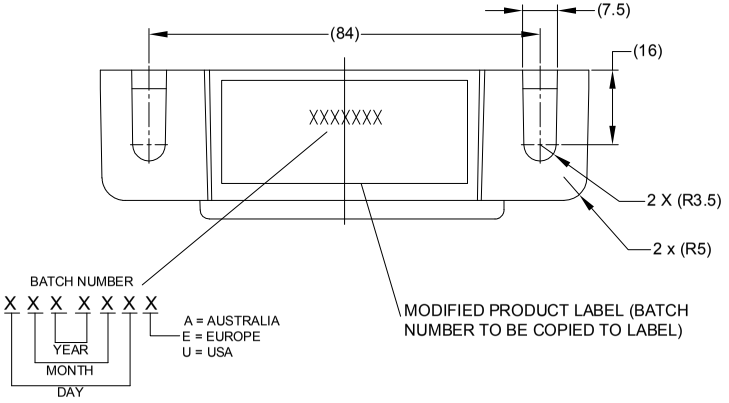

CHANGES FROM BASE PRODUCT BSS-87 (0897B) TO BBS-87(SC) (1015A):

CHANGE:
1. 300mm OF 5mm ØID BLACK PVC SLEEVE ADDED TO CABLE.
2. SUMITOMO CONNECTOR ADDED.
3. REMOVE FITTING GUIDE LABEL (LOCATED ON THE END OF POWER WIRES).
4. MODIFIED PRODUCT LABEL ADDED REF LATEST REVISION OF DRW BE-002604-XX-13 & TEMPLATE BE-00206-XX-13.
5. REPLACEMENT GIFT BOX LABEL ADDED TO NEW GIFT BOX REF LATEST REVISION OF DRW BE-002605-XX-13 & TEMPLATE BE-002607-XX-13.

OPERATION: SAME AS BASE PRODUCT.

SPECIFICATION:
RATED VOLTAGE: 12-24VDC (WORKING VOLTAGE 9-32VDC).
RATED CURRENT: 0.2A OR LESS.
SOUND PRESSURE: 87±4DECIBELS AT TEST VOLTAGE OF 14 AND 28 VOLTS.
INTERMITTENCE: 80±10 CYCLES PER MINUTE AT TEST VOLTAGES 14 AND 28 VOLTS.
OPERATING TEMPERATURE: -40° TO +85°.
TONE: WHITE SOUND (bbs)
ENVIRONMENTAL TEST: SUBJECT TO SAE J994.
FINISH: MATT BLACK.
MATERIAL: ABS PLASTIC.

NOTES:
1. REFER TO BASE PRODUCT FOR PRODUCT SPECIFICATION.

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
www.brigade-electronics.com

Assembly PI Approval N.MEHTA 22/08/13	Approved by B.JOHN	Checked by R.BATES	Drawn by P.MISSEN
Angle of Projection	Units mm / Scale N/A	Released 27/08/13	Assembly Ref -
Third Angle	Status RELEASED	BBS-87(SC)	
	Part No 1015A	BE-002603-01-13	

FrameV3