
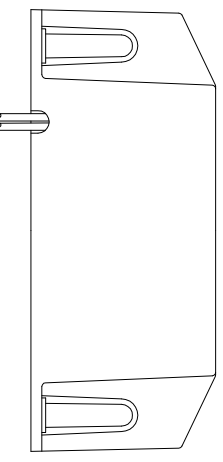
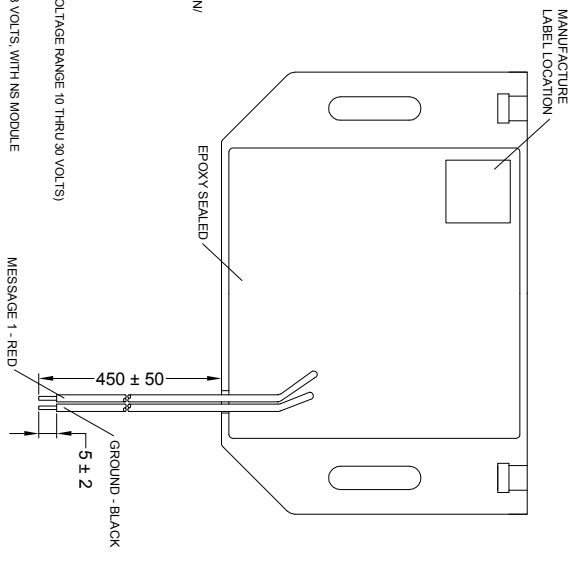
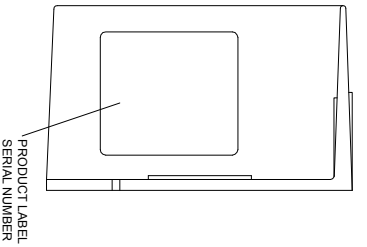
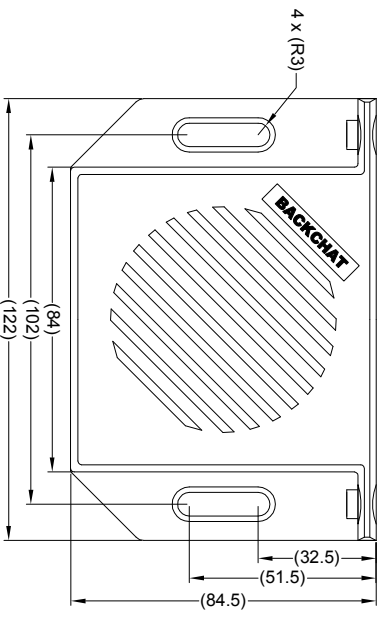


Revision Notes			
R1 - NOTES UPDATED TO INDICATE CORRECT LABEL DETAILS. STANDARDS UPDATED AS PER ECR CR-A253			
APAC AHEDDLE	Drawn/BATES	Checked/MBUTLER	Approved/GPUTH
			Date: 06/02/14

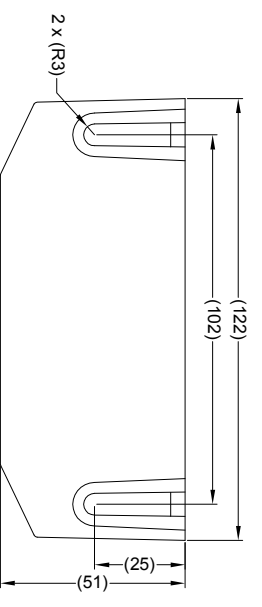

**SPECIFICATION**

RATED VOLTAGE: 12 AND 24 VOLTS DIRECT CURRENT (WORKING VOLTAGE RANGE 10 THRU 30 VOLTS)

RATED CURRENT: 0.5 AMPERES OR LESS

SOUND PRESSURE: 90dB DECIBELS AT TEST VOLTAGE OF 14 AND 28 VOLTS, WITH NS MODULE

THE ALARM IS SILENT WITH REVERSE DOUBLE ENGAGED WITHIN 2 SECONDS

CABLE THICKNESS: ALL CABLES 2#02MM

MESSAGE(S): 'BESPOKE CUSTOM MESSAGE'

MESSAGE LIBRARY NUMBER(S): LIBRARY NUMBER IS ASSIGNED AFTER CONFIRMATION

VOICE/ACCENT: DEPENDENT ON CUSTOM MESSAGE

LANGUAGE: DEPENDENT ON CUSTOM MESSAGE

- NOTES:**
1. MATERIAL: ABS PLASTIC - ULTRA VIOLET STABILIZED
  2. FINISH: BLACK
  3. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002749-XX-13
  4. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002325-XX-13
  5. FOR MANUFACTURE LABEL REFER TO LATEST REVISION OF DRAWING BE-001990-XX-12
  6. 2 X M6 X 25 BOLTS, 2 X M6 FLAT WASHER & 2 X M6 NUTS ARE SUPPLIED IN A PRESS SEAL BAG IN THE BOX.
  7. POWER & MESSAGE CABLES LENGTHS ARE MEASURED FROM CABLE ENTRY POINT ON HOUSING.

**PROPRIETARY NOTICE**

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

**BRIGADE**  
www.brigade-electronics.com

 Third Angle	Assembly PI Approval	Approved by	Checked by	Drawn by
	AHEDDLE	DKERAL	JNEWMAN	MBUTLER
Angle of Projection	Units	Scale	Released	Assembly Ref
	mm	N/A	22/07/11	BC-01(NS-B)
Status	RELEASED			
Part No	#1198			
				BE-0014,17-01-11