
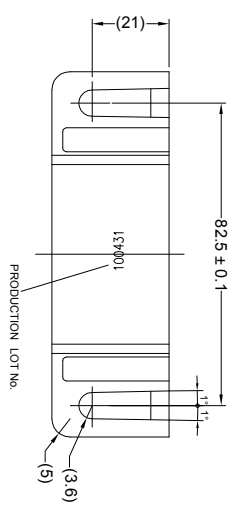
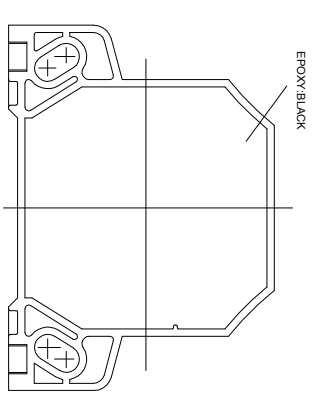


Revision Notes			
R1 - DRAWING UPDATED TO INCLUDE LABEL DETAILS IN NOTES, STANDARDS UPDATED: AS PER 01529			
APPA: KILDA	Drawn: RBATES	Checked: MBUTLER	Approved: GRUTH Date: 18/12/13
R2 - NOTES UPDATED TO INCLUDE LABEL DETAILS, STANDARDS UPDATED AS PER ECR CR-A274.			
APPA: KILDA	Drawn: RBATES	Checked: MBUTLER	Approved: GRUTH Date: 28/08/14

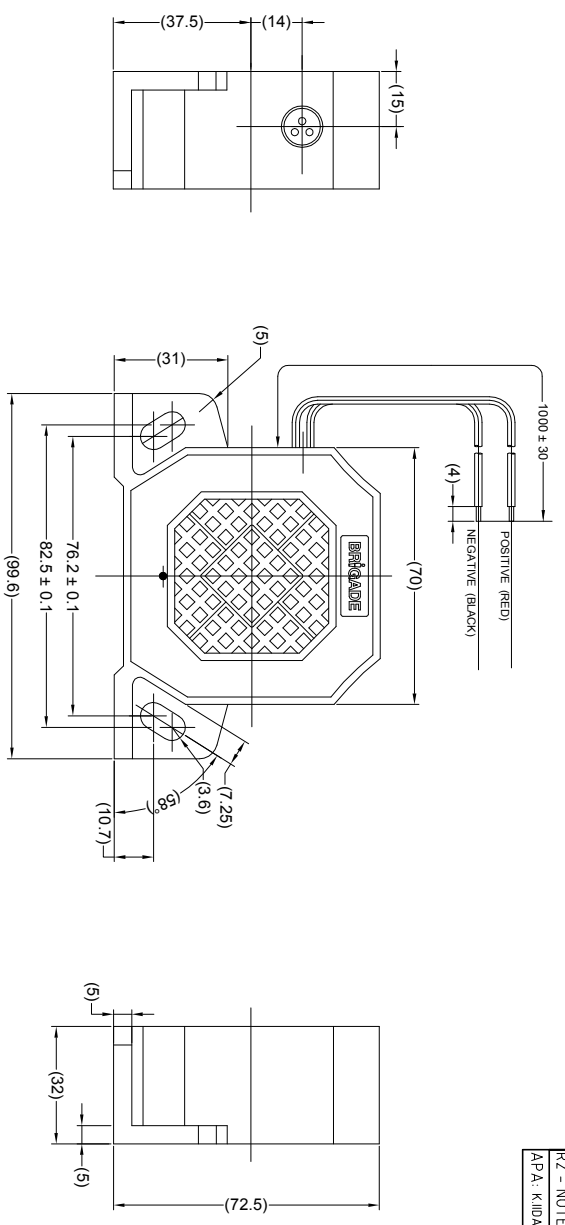

- SPECIFICATION:**
1. RATED VOLTAGE: 12-24VDC (WORKING VOLTAGE 9-32VOLTS)
 2. RATED CURRENT: 0.3A OR LESS.
 3. SOUND PRESSURE: 102.4DECIBELS AT TEST VOLTAGES OF 14-28 VOLTS. (AS MEASURED AT A DISTANCE OF 1.2METERS AND AT A HEIGHT OF 1.2METERS ABOVE THE GROUND)
 4. FREQUENCY: 1400±200Hz AT TEST VOLTAGES OF 14-28 VOLTS.
 5. INTERMITTENCE: CONTINUATION
 6. DURABILITY: TO BE ABNORMALITY-FREE AFTER SUBJECT TO ITEM 5.6. SAEJ1105.
 7. SURGE VOLTAGE: TO BE FREE FROM ABNORMALITY WHEN APPLYING 100V, 100ms PULSES FOR 5 SECONDS AT A TEST VOLTAGE OF 28 VOLTS.
 8. RANGE OF OPERATING TEMPERATURE GUARANTEED: -40°C ~ 85°C.

- NOTES:**
1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
 2. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002834-XX-14.
 3. 'R TRIANGLE' INDICATES CHANGES MADE TO REVISION OF DRAWING AS IDENTIFIED IN REVISION NOTES.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly PI Approval		Approved by		Checked by		Drawn by	
DKERAL		DKERAL		DKERAL		DKERAL	
Angle of Projection		Units	Scale	Released	Assembly Ref		
Third Angle		mm	N/A	21/01/06	-		
		Status	CT-470				
		RELEASED					
		Part No	BE-000377-02-06				