
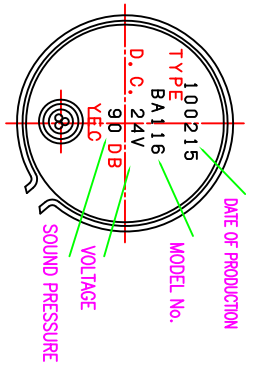


仕 様 書

1. 定格電圧：0.0224V (標準電圧範囲0.018~0.21V)
2. 定格電流：0.2A1F (最大電流 1A1F)
3. 定格電圧：0.2 AMPERES OR LESS (NOMINAL CURRENT 1 AMPERES OR LESS)
4. 定格電流：90.48 dB (標準電圧：0.0224V) (標準電流：0.2A)
5. 定格電流：90.48 DEGREES AT RATED VOLTAGES (AS MEASURED AT A DISTANCE OF 1 METERS AND AT A HEIGHT OF 1 METERS ABOVE THE GROUND)
6. 定格電流：800.42 000Hz
7. 定格電流：800.42 000Hz AT RATED VOLTAGES
8. 定格電流：80.42 CYCLES PER MINUTE AT RATED VOLTAGES
9. 定格電流：80.42 CYCLES PER MINUTE AT RATED VOLTAGES
10. 定格電流：80.42 CYCLES PER MINUTE AT RATED VOLTAGES
11. 定格電流：80.42 CYCLES PER MINUTE AT RATED VOLTAGES
12. 定格電流：80.42 CYCLES PER MINUTE AT RATED VOLTAGES

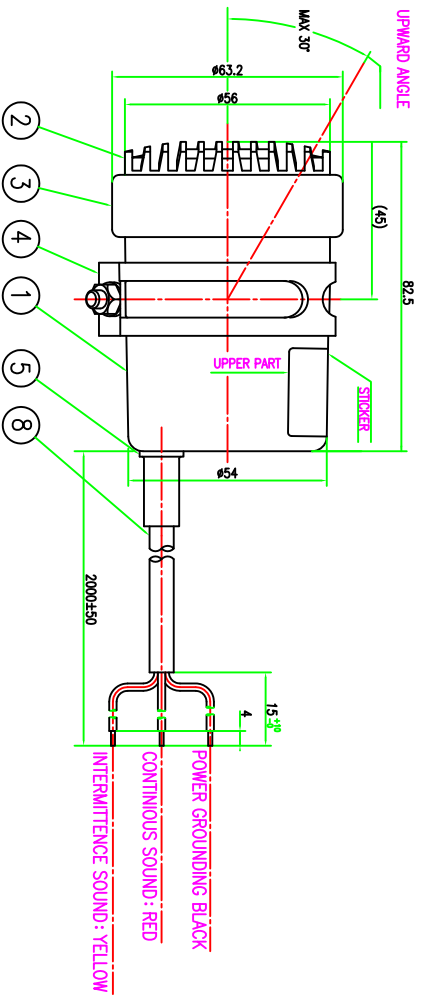

\* SEAL COLOR BLACK

PROPRIETARY NOTE  
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS PLC AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATE BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS PLC.

ITEM NO.	QUANTITY	TITLE/NAME, DESIGNATION, MATERIAL, DIMENSION ETC	ARTICLE NO./REFERENCE
DESIGNED BY	CHECKED BY	APPROVED BY	DATE
MAUTLER			06/05/08
BRIGADE ELECTRONICS PLC			DF-116 (1457)
BE-000564-00-08			EDITION 0
			SHEET 1/1