
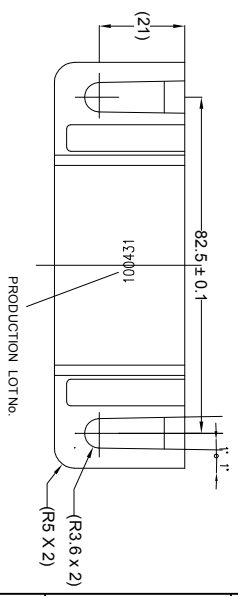
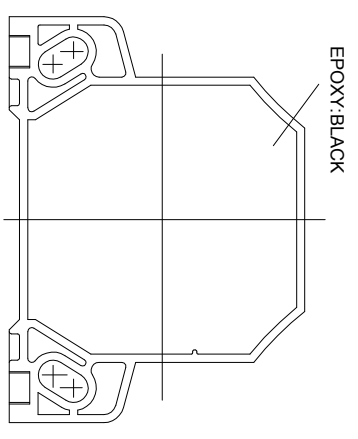


Revision Notes			
R1 - STANDARDS UPDATED, NOTES UPDATED TO REFLECT LABEL DETAILS AS PER Q1520.			
AP: A. KILDA	Drawn/BATES	Checked/M BUTLER	Approved/G SLITH
			Date: 28/08/14

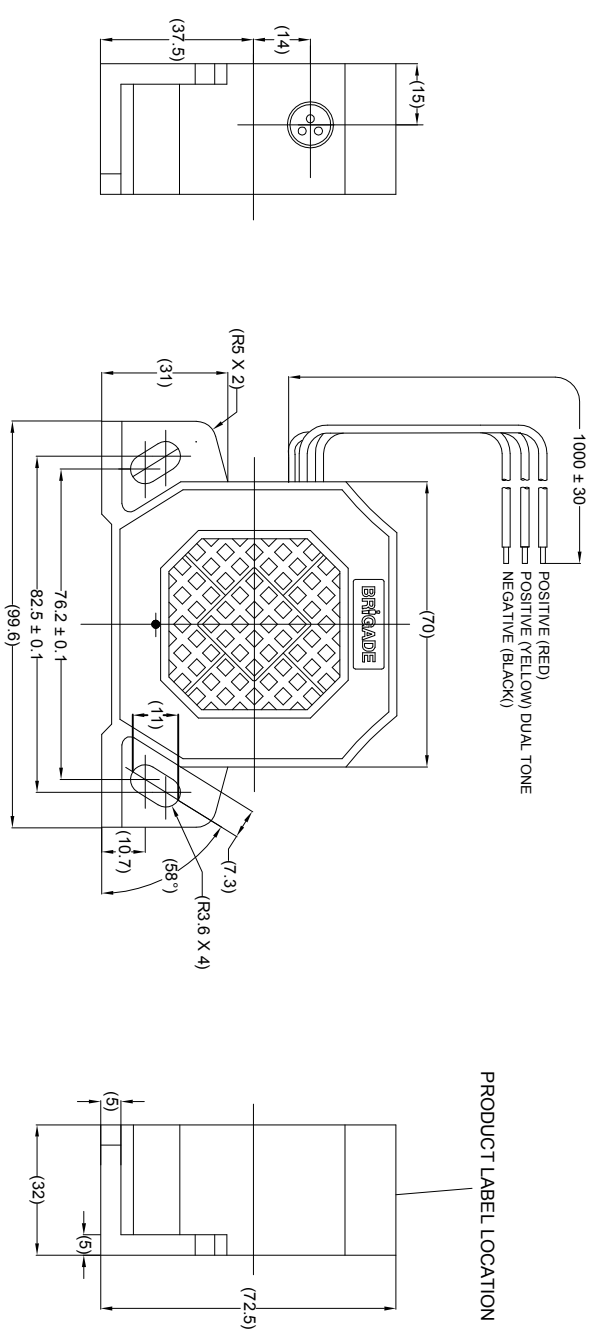

SPECIFICATION

- 1, RATED VOLTAGE: 12/24VDC (WORKING VOLTAGE 9 THRU 32VOLTS)
- 2, RATED CURRENT: 0.3A OR LESS
- 3, SOUND PRESSURE: 102+/-4DECIBELS AT TEST VOLTAGE OF 14-28 VOLTS, (AS MEASURED AT A DISTANCE OF 1.2METRES AND A HEIGHT OF 1.2METRES ABOVE THE GROUND)
- 4, FREQUENCY: 1400+/-200HZ AT TEST VOLTAGE OF 14-28 VOLTS BACKUP SOUND DUAL TONE 1400/1550+/-200HZ
- 5, INTERMITTENCE: CONTINUATION (FREQUENCY CHANGE: 80 ± 10 CYCLE PER MINUTE)
- 6, DURABILITY: TO BE ABNORMALITY-FREE AFTER SUBJECT TO ITEM SAEJ994.
- 7, TO BE ABNORMALITY-FREE AS TESTED TO ISO7837 ITEM 3a, 3b, 5.
- 8, RANGE OF OPERATING TEMP. GUARANTEED: -40C THRU 85C
- 9, ENVIRONMENTAL TESTS PER SAE J994.

NOTES:

1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
2. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002834-XX-14.
3. "R" TRIANGLE INDICATES CHANGES MADE TO REVISION OF DRAWING AS IDENTIFIED IN REVISION NOTES.



PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



<p>Angle of Projection</p> <p>Third Angle</p>	Assembly Pl Approval	Approved by	Checked by	Drawn by
	-	DKERAL	DKERAL	DKERAL
<p>Status</p> <p>RELEASED</p>	Units	Scale	Released	Assembly Ref
	mm	N/A	21/04/06	-
Part No	DF-470			
2068	BE-00379-01-06			