





Revision Notes	
R1 -	
APR -	Drawn -
	Checked -
	Approved -
	Date -

- CHANGES FROM BASE PRODUCT DF-470 (1360) TO DF-470 (3DC) (2068):
1. THREE CORE CABLE CUT FROM 1000 ± 30 TO 140 ± 30.
 2. PVC SLEEVE ADDED.
 3. DEUTSCH CONNECTOR ADDED.
 4. DF-470 GB-LBL REPLACED WITH WAREHOUSE GIFTBOX LABEL.
- OPERATION: OPERATION WILL REMAIN THE SAME.



PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12V
2	BLACK	GROUND
3	YELLOW	+12V (DUAL TONE)

PRODUCT LABEL LOCATION

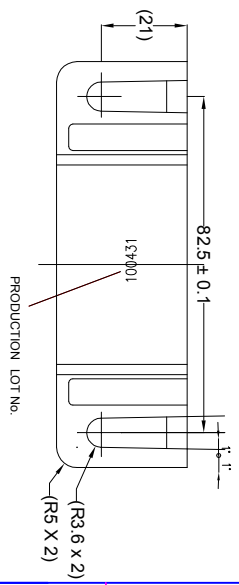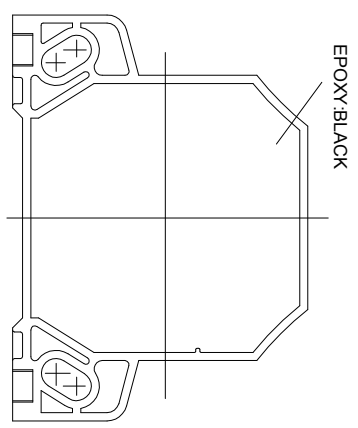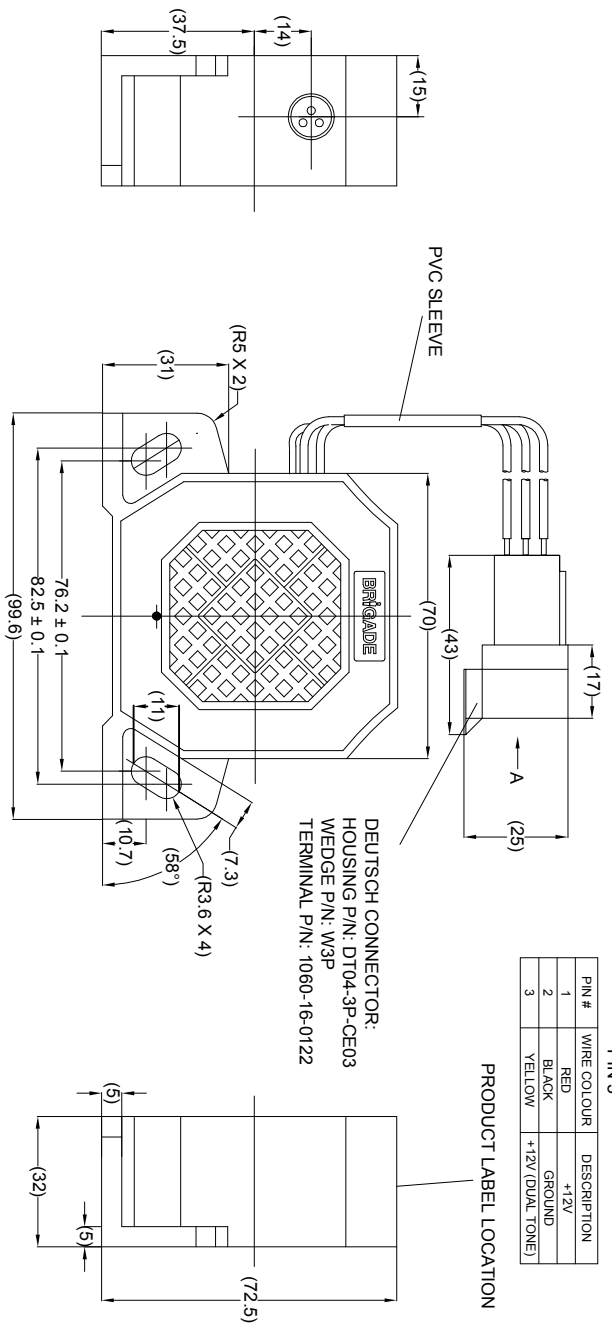

- SPECIFICATION:
1. RATED VOLTAGE: 1224VDC (WORKING VOLTAGE 9 ~ 32 VOLTS).
 2. RATED CURRENT: 0.3A OR LESS
 3. SOUND PRESSURE: 102 ± 4 DECIBELS AT TEST VOLTAGES OF 14-28 VOLTS.
(AS MEASURED AT A DISTANCE OF 1.2 METERS AND AT A HEIGHT OF 1.2 METERS ABOVE THE GROUND)
 4. FREQUENCY: 1400 ± 200HZ AT TEST VOLTAGE OF 14-28 VOLTS BACKUP SOUND DUAL TONE 1400/1550 ± 200HZ
 5. INTERMITTENCE: CONTINUATION
 6. DURABILITY: TO BE ABNORMALITY FREE AFTER SUBJECT TO ITEM 5.6 SAEJ1105.
 7. SURGE VOLTAGE: TO BE FREE FROM ABNORMALITY WHEN APPL YING 100V, 100 ms PULSES FOR 5 SECONDS AT TEST VOLTAGE OF 28 VOLTS.
 8. RANGE OF OPERATING TEMPERATURE GUARANTEED: -40°C ~ 85°C

- NOTES:
1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002744-XX-13.
 2. GIFTBOX LABEL CONTROLLED BY OPERATIONS AND MATERIALS.
 3. PVC SLEEVE IS NOT FIXED AND IS FREE TO MOVE ALONG CABLE.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
 www.brigade-electronics.com

Angle of Projection Third Angle	Assembly Pl Approval NAREN - 16/12/13	Approved by GPLTH	Checked by LBRAR	Drawn by RBATES
	Status RELEASED	Units mm	Scale N/A	Released 06/07/14
	Part No #2068		DF-470(3DC)	BE-002742-00-13