Revision Notes.				
R1 - NOTES UPDATED TO INCLUDE LABEL DETAILS AS PER ECR CR-A274.				
APA: K.IIDA	Drawn:R.BATES	Checked:M.BUTLER	Approved:G.PLITH	Date: 28/08/14

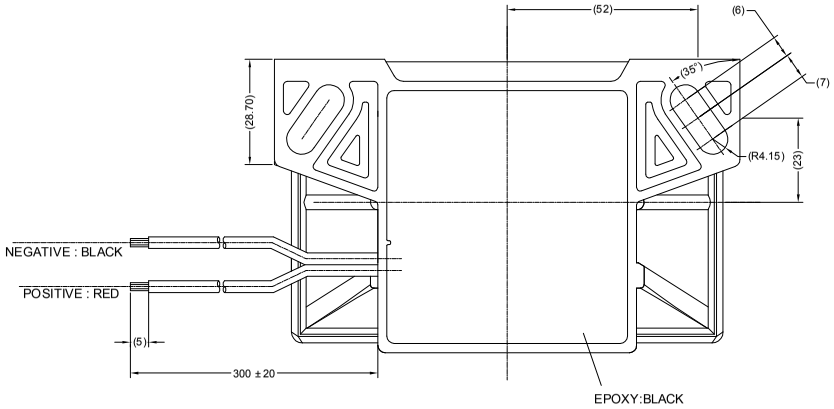



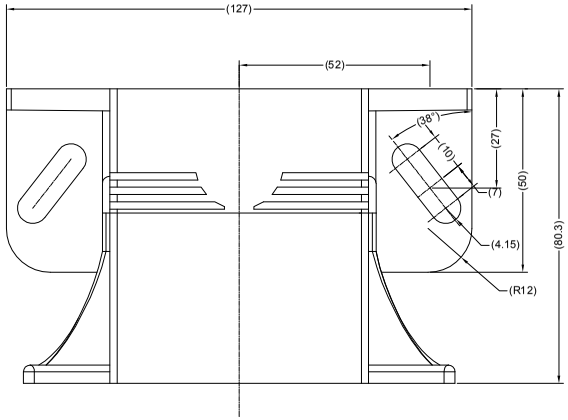

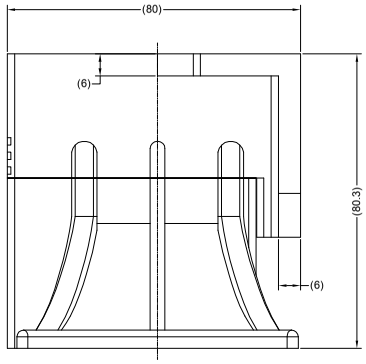

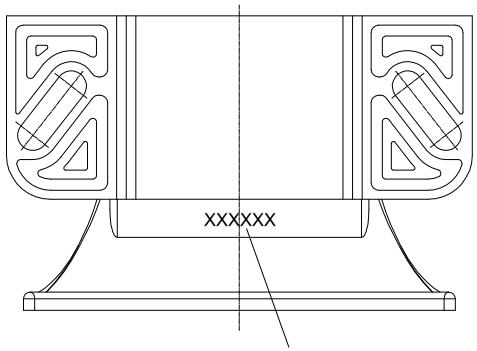

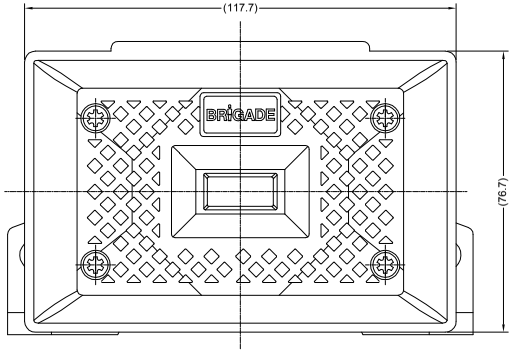

SPECIFICATION:
1. RATED VOLTAGE: 12/24VDC (WORKING VOLTAGE RANGE 9 ~ 32V)
2. RATED CURRENT: 0.5 AMPERES OR LESS.
3. SOUND PRESSURE: SELF-ADJUSTING 82 ~ 107±4dB(A)
(MINIMUM OF 5dB(A) ABOVE SENSED AMBIENT NOISE)
4. FREQUENCY: 1900 ± 200Hz AT TEST VOLTAGES OF 14 AND 28 VOLTS.
5. PULSE RATE: 80 ± 10 CYCLES PER MINUTE AT TEST VOLTAGES OF 14 AND 28 VOLTS)
6. DURABILITY: CONTINUOUS 500 HOURS AT TEST VOLTAGE OF 32 VOLTS.
7. TEMPERATURE: -40°C ~ 85°C.
8. SURGE VOLTAGE TEST: TO BE ABNORMALITY FREE AS TESTED SUBJECT TO ISO7637 ITEM 3a, 3B, 5.
9. OTHERS: MEET REQUIREMENTS OF SAE J994.

NOTES:
1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING: BE-002833-XX-14.
2. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING: BE-002834-XX-14.
3. "R TRIANGLE" INDICATES CHANGES MADE TO REVISION OF DRAWING AS IDENTIFIED IN REVISION NOTES. R1

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
www.brigade-electronics.com

Assembly Pl Approval	Approved by	Checked by	Drawn by
-	D.KERAI	D.KERAI	D.KERAI

Angle of Projection	Units	Scale	Released	Assembly Ref
Third Angle	mm	N/A	21/04/06	-

Status	
RELEASED	SA-600
Part No 1312	BE-000380-01-06

FrameV3