




Revision Notes			
R1 - CONNECTOR POLARITIES ADDED. STANDARDS AND FRAME UPDATED AS PER Q14/61.			
APPA: KILDA	Drawn/MBUTLER	Checked/MBUTLER	Approved/GRUTH Date: 17/11/13
R2 - NOTES UPDATED TO INCLUDE LABEL DETAILS AS PER IECR CR-A274.			
APPA: KILDA	Drawn: RBATES	Checked: MBUTLER	Approved: GRUTH Date: 28/08/14

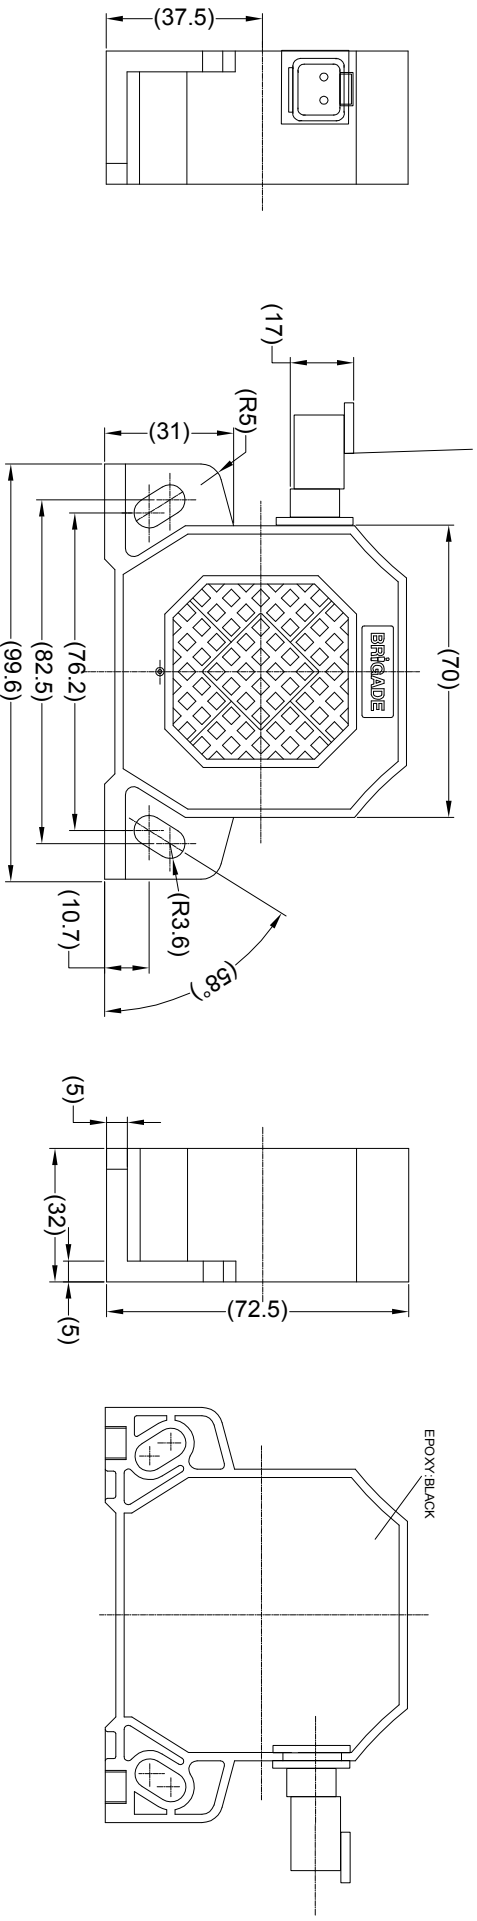

- SPECIFICATION**
1. RATED VOLTAGE: 12-24 VOLTS DIRECT CURRENT (WORKING VOLTAGE RANGE 9 ~ 32 VOLTS.
 2. RATED CURRENT: 0.2 AMPERES OR LESS
 3. SOUND PRESSURE: 97.44 DECIBELS AT TEST VOLTAGES OF 14.28 VOLTS. (AS MEASURED AT A DISTANCE OF 1.2 METERS AND AT A HEIGHT OF 1.2 METERS ABOVE THE GROUND)
 4. FREQUENCY: 1400±200HZ AT TEST VOLTAGES OF 14.28 VOLTS.
 5. INTERMITTENCE: 80±10 CYCLES PER MINUTE AT TEST VOLTAGES OF 14.28 VOLTS.
 6. DURABILITY: CONTINUOUS 500 HOURS AT TEST VOLTAGE OF 32 VOLTS.
 7. RANGE OF OPERATING TEMP. GUARANTEED: -40°C ~ 85°C.
 8. SURGE VOLTAGE TEST: TO BE ABNORMALITY-FREE AS TESTED SUBJECT TO ISOT637 ITEM 3a, 3b, 5.

- NOTES:**
1. FINISH: BLACK
 2. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING: BE-002833-XX-14
 3. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING: BE-002834-XX-14.
 4. "R TRIANGLE" INDICATES CHANGES MADE TO THE REVISION AS IDENTIFIED IN NOTES.

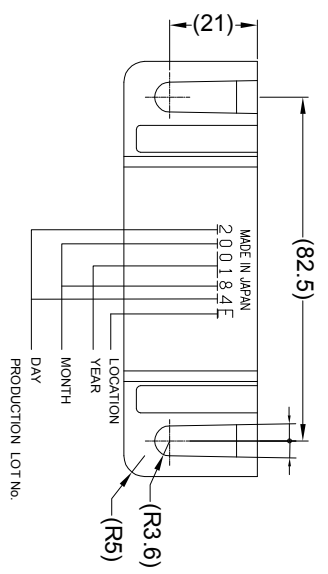

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



<p>Angle of Projection</p> <p>Third Angle</p>	<p>Assembly Pl Approval</p> <p>-</p>	<p>Approved by</p> <p>DKERAL</p>	<p>Checked by</p> <p>DKERAL</p>	<p>Drawn by</p> <p>DKERAL</p>
	<p>Status</p> <p>RELEASED</p>	<p>Units</p> <p>mm</p>	<p>Scale</p> <p>N/A</p>	<p>Released</p> <p>21/04/01</p>
	<p>Part No</p> <p>#1332</p>			<p>Date</p> <p>BE-000382-02-06</p>