

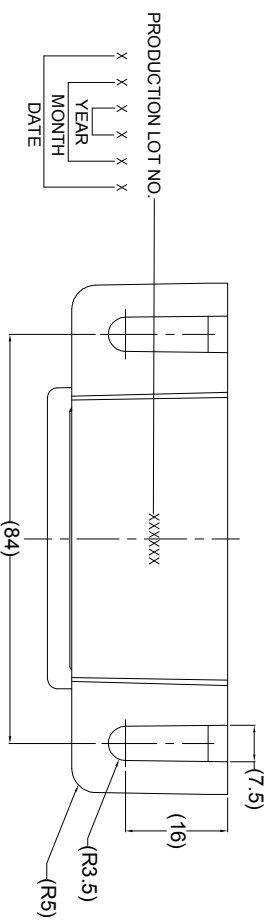


Revision Notes			
R1 - NOTES UPDATED TO INCLUDE LABEL DETAILS AS PER ECR CR -A274.			
APPA KIDA	Drawn/RBATES	Checked/GPUTH	Approved/GPUTH
			Date: 28/08/14

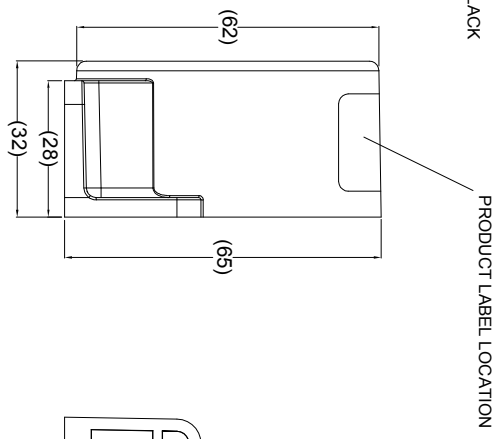

- SPECIFICATION:**
1. RATED VOLTAGE: 12/24 VOLTS DIRECT CURRENT (WORKING VOLTAGE RANGE 9-32 VOLTS.)
 2. CONSUMPTION CURRENT: 0.3 AMPERES OR LESS.
 3. SOUND PRESSURE: 87±4 DECIBELS AT TEST VOLTAGE OF 14/28 (AS MEASURED AT DISTANCE OF 1.2M AND AT A HEIGHT OF 1.2M ABOVE THE GROUND.)
 4. FREQUENCY: 1600±200Hz AT TEST VOLTAGE OF 14/28 VOLTS.
 5. INTERMITTENCE: 80±15 CYCLES PER MINUTE AT TEST VOLTAGE OF 14/28 VOLTS.
 6. DURABILITY: TO BE FREE OF ABNORMALITY AFTER BEING TESTED FOR 500 HOURS CONTINUOUSLY AT TEST VOLTAGE OF 32 VOLTS.
 7. RANGE OF OPERATING TEMPERATURE GUARANTEED: -40°C ~ +85°C
 8. ENVIRONMENTAL: SUBJECT TO SAE J994.
 9. FOR PRODUCT LABEL REFER TO THE LATEST REVISION OF DRAWING BE-002328-XX-13

- NOTES**
1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
 2. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002834-XX-14.
 3. 'R TRIANGLE' INDICATES CHANGES MADE TO REVISION AS IDENTIFIED IN NOTES.

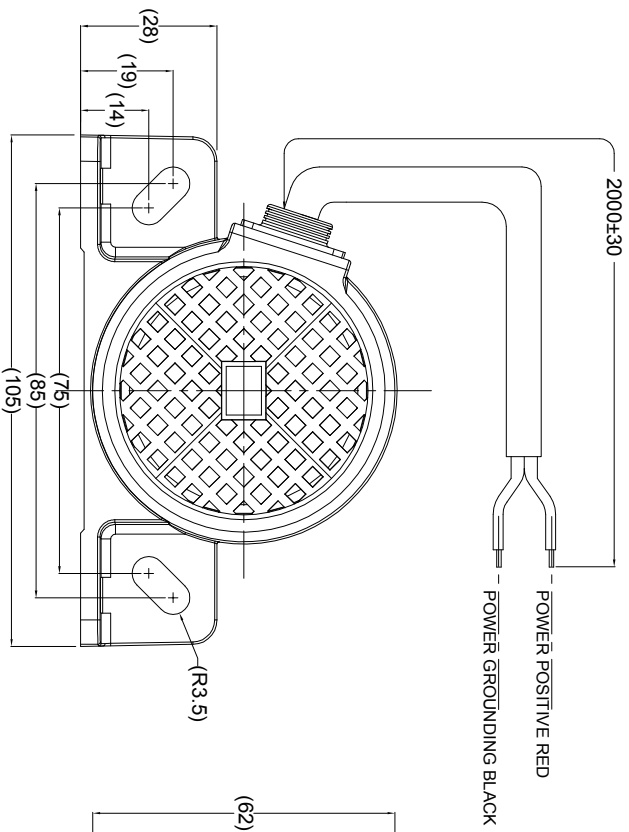

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
 www.brigade-electronics.com

Assembly PI Approval KILDA - 04/03/13		Approved by SMAITHENS		Checked by GPUTH		Drawn by RBATES	
Angle of Projection Third Angle		Scale N/A		Released 05/03/13		Assembly Ref -	
Status RELEASED		BA-530TCA-2					
Part No 2741		BE-002324-01-13					