

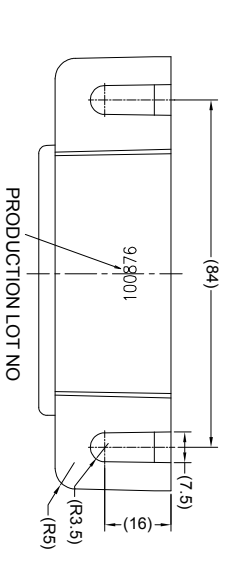
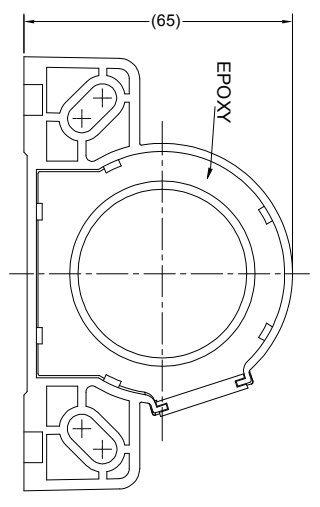



Revision Notes			
R1 - NOTES UPDATED TO INCLUDE LABEL DETAILS, STANDARDS UPDATED AS PER ECR CR- A274.			
AP: A. KILDA	Drawn: BATES	Checked: M BUTLER	Approved: G LITH
			Date: 28/08/14



- SPECIFICATION:**
1. RATED VOLTAGE: 12 AND 24 VOLTS DIRECT (WORKING VOLTAGE RANGE 9 ~ 32 VOLTS)
  2. RATED CURRENT: 0.3 AMPERES OR LESS.
  3. SOUND PRESSURE: 102±4 DECIBELS AT TEST VOLTAGES OF 14 AND 28 VOLTS (AS MEASURED AT A DISTANCE OF 1.2 METERS AND AT A HEIGHT OF 1.2 METERS ABOVE THE GROUND)
  4. FREQUENCY: 1600 ± 200Hz AT TEST VOLTAGE OF 12 AND 28 VOLTS.
  5. INTERMITTENCE: 80±15 CYCLES PER MINUTE AT TEST VOLTAGES OF 14 AND 28 VOLTS.
  6. DURABILITY: TO BE FREE FROM ABNORMALITY AFTER BEING TESTED FOR 500 HOURS CONTINUOUSLY AT TEST VOLTAGE OF 32 VOLTS.
  7. RANGE OF OPERATING TEMPERATURE GUARANTEED: -40°C ~ 85°C.
  8. OTHERS: SUBJECT TO SAE J994.

- NOTES:**
1. FINISH: MATT BLACK
  2. MATERIAL: ABS PLASTIC
  3. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
  4. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002834-XX-14.
  5. "R TRIANGLE" INDICATES CHANGES MADE TO REVISION AS IDENTIFIED IN NOTES.

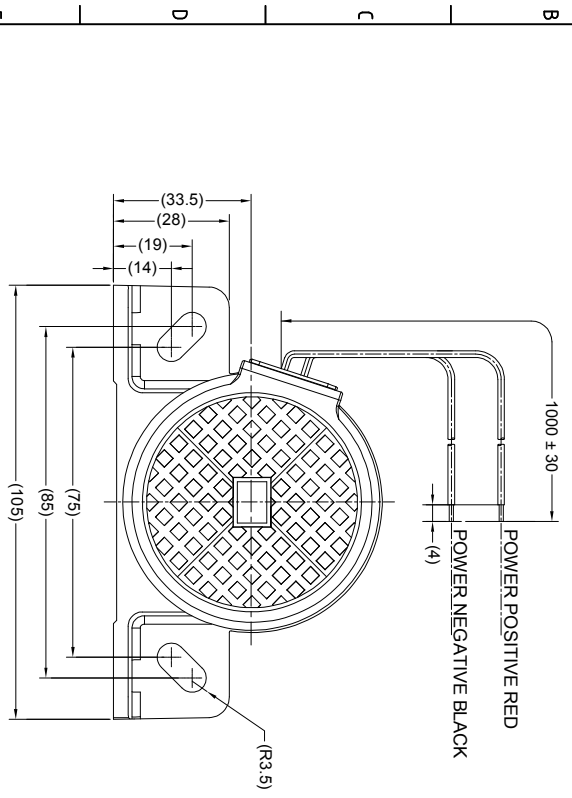

**PROPRIETARY NOTICE**  
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly Pl Approval 	Approved by	Checked by	Drawn by
	S.MATTHEWS	D.KERAI	M.BUTLER
Angle of Projection	Units	Scale	Released
Third Angle	mm	N/A	02/03/10
Status	Part No	Assembly Ref	
RELEASED	#2885	BA-570	
		BE-001008-01-10	