
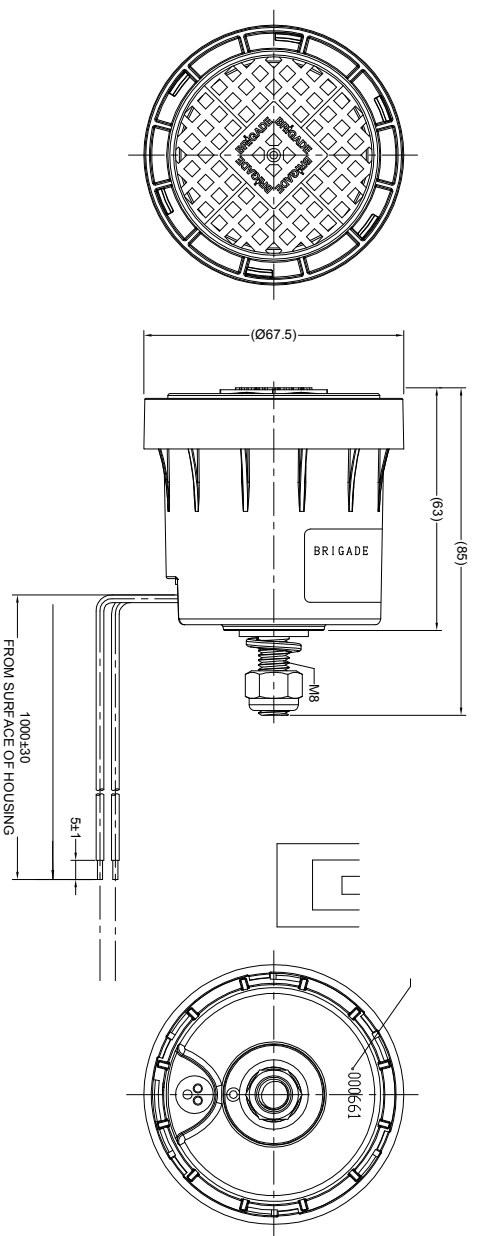


Revision Notes			
R1 - NOTES UPDATED TO INCLUDE LABEL DETAILS, STANDARDS UPDATED AS PER ECR CR- A274.			
APR: KILDA	Drawn/BATES	Checked/MBUTLER	Approved/GRITH
			Date: 28/08/14




- SPECIFICATION:**
1. RATED VOLTAGE: 12 AND 24 VDC (WORKING VOLTAGE RANGE 9-32 VOLTS)
 2. RATED CURRENT: 0.3 AMPERES OR LESS
 3. SOUND PRESSURE LEVEL: 102±4dB AT TEST VOLTAGES OF 14-28 VOLTS (MEASURED AT A HEIGHT OF 1.2m AND AT A DISTANCE OF 1.2m)
 4. FREQUENCY: 1400±250HZ AT TEST VOLTAGES OF 14 AND 28 VOLTS
 5. INTERMITTENCE: 80±15 CYCLES PER MINUTE AT TEST VOLTAGES OF 14 AND 28 VOLTS
 6. DURABILITY: TO BE FREE FROM ABNORMALITY AFTER BEING TESTED FOR 100 HOURS CONTINUOUS AT TEST VOLTAGES OF 32V.
 7. RANGE OF OPERATING TEMPERATURE: -40°C TO 85°C.
 8. SURGE VOLTAGE: TO BE FREE FROM ABNORMALITY BEING TESTED FOR 1 HOUR WITH SUPPLYING 100V/100 ms WITH CYCLE OF 5 SECONDS AT TEST VOLTAGE OF 28 VOLT.
 9. ENVIRONMENT: SUBJECT TO SAEJ994.
 10. TORQUE: THE TORQUE TO FASTEN THE NUT SHOULD BE LESS THAN 10N M.

- NOTES:**
1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
 2. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002834-XX-14.
 3. "R TRIANGLE" INDICATES CHANGES MADE TO REVISION AS IDENTIFIED IN NOTES. 

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



 Angle of Projection Third Angle	Assembly Pt Approval DKERAL		Approved by DKERAL		Checked by DKERAL		Drawn by MBUTLER	
	Status RELEASED Part No 2174	Units mm	Scale N/A	Released 06/05/08	Released -	Assembly Ref BA-760		