Revision Notes.				
R1 - NOTES UPDATED TO INCLUDE LABEL DETAILS, STANDARDS UPDATED AS PER ECR CR-A274.				
APA: K.IIDA	Drawn:R.BATES	Checked:M.BUTLER	Approved:G.PLITH	Date: 28/08/14

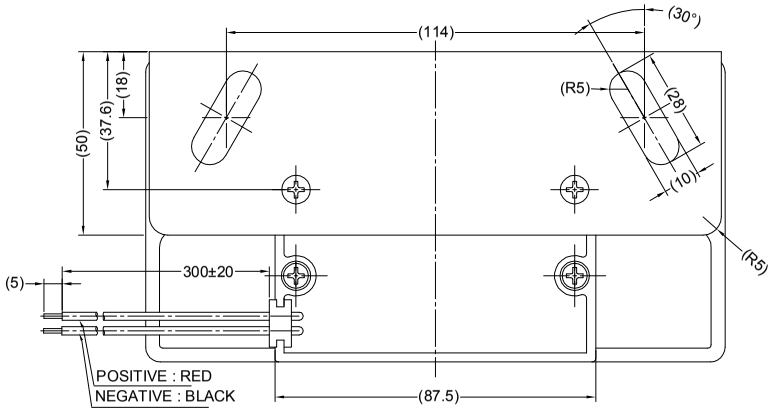

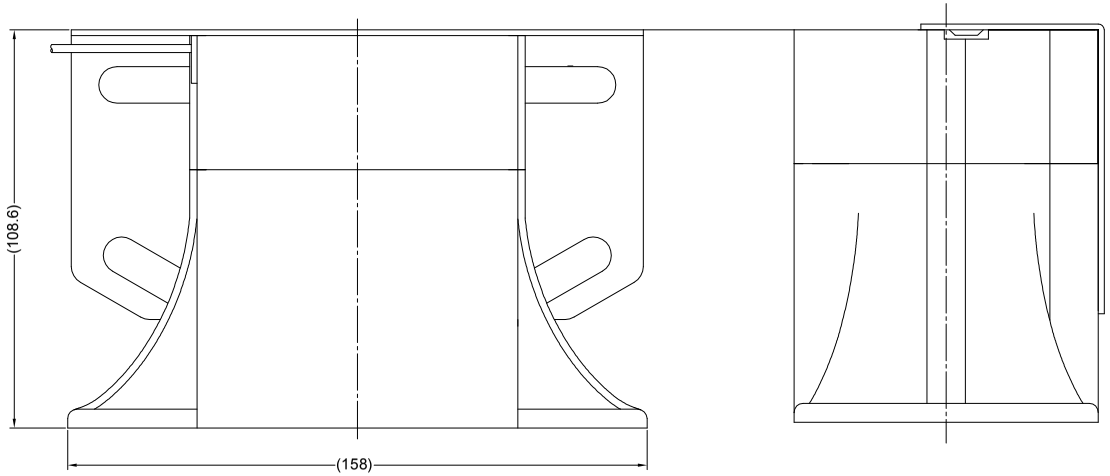

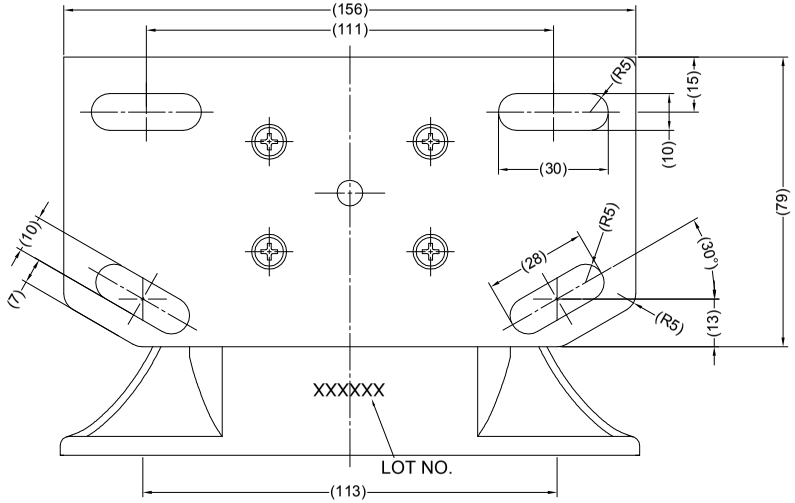

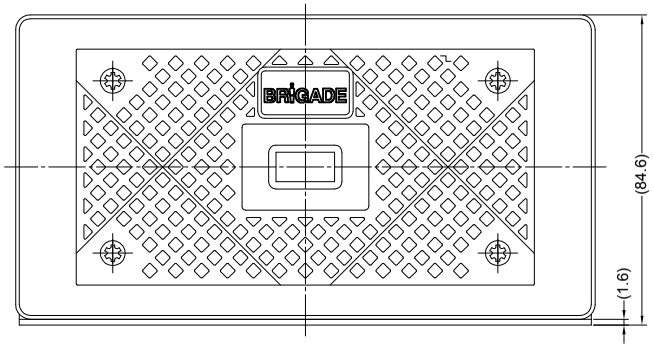

NOTES:
1. RATED VOLTAGE: DC 12/24 (WORKING VOLTAGE RANGE 9 ~ 32VOLTS)
2. RATED CURRENT: 0.5 AMPERES OR LESS
3. SOUND PRESSURE: 107±4dB AT TEST VOLTAGES OF 14 AND 28 VOLTS.
(AS MEASURED AT DISTANCE OF 1.2m AND AT A HEIGHT OF 1.2m ABOVE THE GROUND)
4. FREQUENCY: 1900±200Hz AT TEST VOLTAGES OF 14 AND 28 VOLTS.
5. INTERMITTENCE: 80±10 CYCLES PER MINUTE CYCLES PER MINUTE AT TEST VOLTAGE OF 14 AND 28 VOLTS.
6. DURABILITY: CONTINUOUS 500 HOURS AT TEST VOLTAGE OF 32 VOLTS.
7. TEMPERATURE RANGE: -40°C ~ 85°C.
8. WATER RESISTANCE: TO RESIST VIBRATION AND BE ABNORMALITY-FREE AS TESTED SUBJECT TO ITEM S1 JIS D0203.
9. VIBRATION RESISTANCE: TO RESIST VIBRATION AND BE ABNORMALITY-FREE AS TESTED SWEEP VIBRATION AS SPECIFIED BELOW.
A LOG SWEEP FROM 24Hz TO 2000Hz WITH A PERIOD OF 30 MINUTES SHALL BE PERFORMED FOR 6 HOURS.
10. SURGE VOLTAGE TEST: TO BE ABNORMALITY-FREE AS TESTED SUBJECT TO ISO7637 ITEM 3a, 3b, 5.
11. OTHERS: MEETS REQUIREMENTS OF SAE J994.

NOTES:
1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
2. FOR GIFTBOX ;ABEL REFER T0 LATEST REVISION OF DRAWING BE-002834-XX-14.
3. "R TRIANGLE" INDICATES CHANGES MADE TO REVISION AS IDENTIFIED IN NOTES. R1

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
www.brigade-electronics.com

Assembly Pl Approval	Approved by	Checked by	Drawn by
-	D.KERAI	D.KERAI	B.KHEZR

Angle of Projection
Third Angle

Units	Scale	Released	Assembly Ref
mm	N/A	22/06/04	-

Status	
RELEASED	BA-880
Part No #1301	BE-000177-01-04

FrameV3