
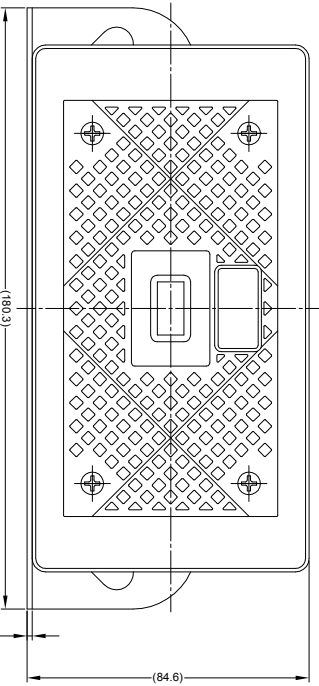
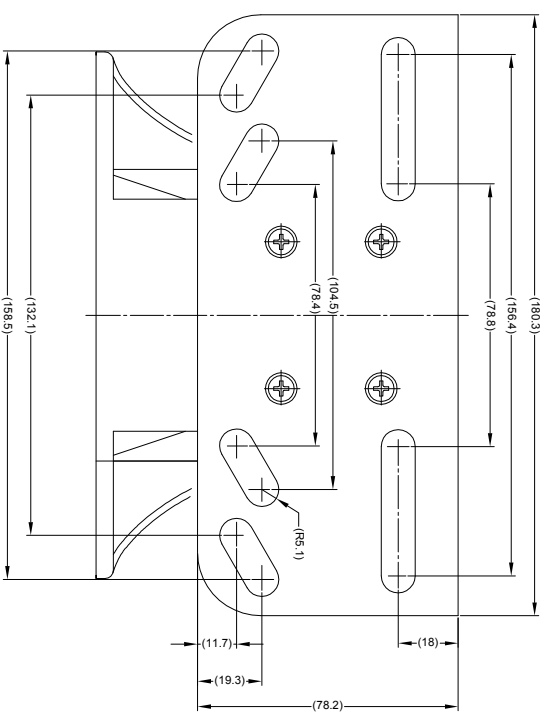
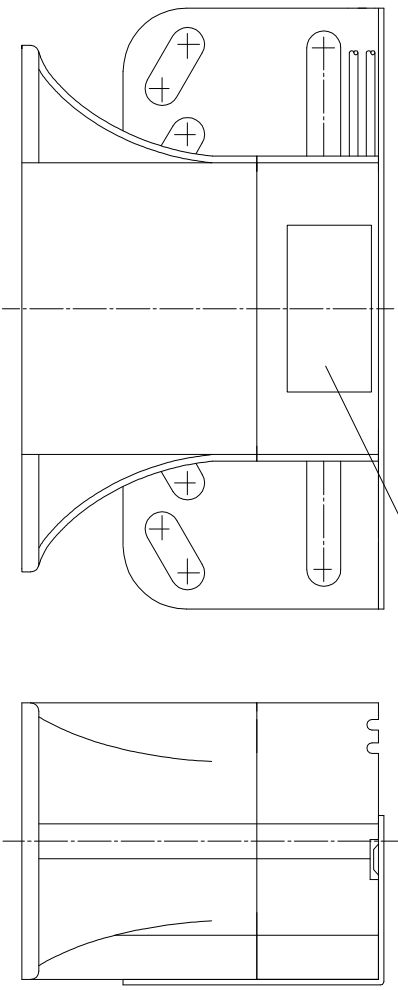


Revision Notes			
R1 - STANDARDS UPDATED, CABLE LENGTH CORRECTED FROM 180 TO 300 AS PER Q1534.			
APAA: KIDA	Drawn: RBATES	Checked: MBUTLER	Approved: GPUTH
R2 - NOTES UPDATED TO INCLUDE LABEL DETAILS AS PER ECR CR-A271.			Date: 11/11/13
APAA: KIDA	Drawn: RBATES	Checked: MBUTLER	Approved: GPUTH
			Date: 28/08/14

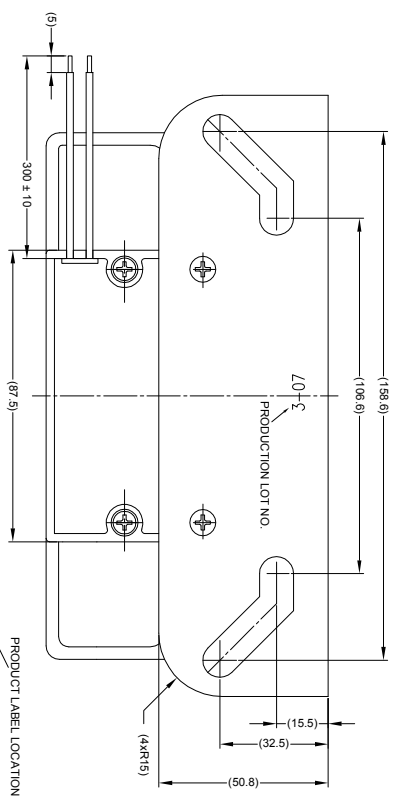

- SPECIFICATION:**
1. RATED VOLTAGE: 12/24 VDC. (WORKING VOLTAGE RANGE 9 ~ 32 VDC)
 2. RATED CURRENT: 1.0 AMPERES OR LESS.
 3. SOUND PRESSURE: 112±4dB AT TEST VOLTAGES OF 14/28 VOLTS. (AS MEASURED AT A DISTANCE OF 1.2m AND AT A HEIGHT OF 1.2m ABOVE THE GROUND.)
 4. FREQUENCY: 1900±200Hz AT TEST VOLTAGES OF 14/28 VOLTS.
 5. INTERMITTENCE: 80±10 CYCLES PER MINUTE AT TEST VOLTAGES OF 14/28 VOLTS.
 6. DURABILITY: CONTINUOUS 500 HOURS AT TEST VOLTAGE OF 32 VOLTS.
 7. TEMPERATURE RANGE: -40°C ~ +85°C.
 8. WATER RESISTANCE: TO RESIST WATER AND BE ABNORMALITY FREE AS TESTED SUBJECT TO ITEM S1, JIS D 0203.
 9. VIBRATION RESISTANCE: PER SAE J984.
 10. SURGE VOLTAGE TEST: TO BE ABNORMALITY FREE AS TESTED SUBJECT TO ISO7637 ITEM 3a,3b,5.
 11. OTHERS: MEET'S REQUIREMENTS OF SAE J994.

- NOTES:**
1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
 2. FOR GIFT BOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002834-XX-14.
 3. "R" TRIANGLE INDICATES CHANGES MADE TO REVISION OF DRAWING AS IDENTIFIED IN NOTES.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
 www.brigade-electronics.com

 Third Angle	Assembly PI Approval		Approved by	Checked by	Drawn by
	 DKERAI		DKERAI	DKERAI	DKERAI
Angle of Projection	Units	Scale	Released	Assembly Ref	
	mm	N/A	23/06/04		
Status	BA-891				
RELEASED					
Part No	BE-000163-02-04				
#1303					

