


Specifications When Used with BA-320 BackBuzzer

1. Nominal Voltage: 24 VDC.
2. Voltage Range: 18-32 VDC.
3. Current: 200 milliamps.
4. Temperature Range: -20°C. to 60°C.
5. Sound Level of BA-320 Attached to Module at 24 VDC:
 - (a) Normal Operation: 90 +/- 5 dB(A) @ 1m.
 - (b) Night Reduction Mode: 80 dB(A) @ 1m.
6. Sound Reduction Double-Engage Time: 5 Seconds +2s -1s.
7. Transient Voltage Spike Tested: 100 V 1ms every 5s for 1hr.
8. Durability Test: 500 Hours Continuous Operation.
9. Vibration Test: JIS D1601 (7G).
10. Output Short Circuit Protection:
 - 5 Second Short To Ground Per Minute.
 - Δ 2005/04/27 Addition

NR-Module Timing Chart

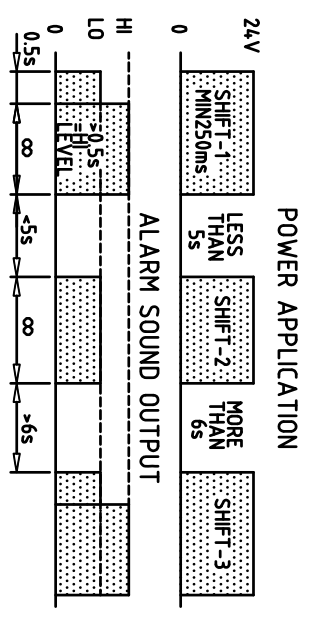

Item#	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Designed by YEC	Checked by DKERAL	Approved by - date	Date 11/10/06
File name NR			Scale N/A

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS PLC, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATE BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS PLC.