


Revision Notes			
R1 - MODEL NO. CHANGED FROM BA-322 TO VRA-322	Drawn: RBATES	Checked: M/POTTER	Approved: S/MATTHEWS
APA -	Drawn: RBATES	Checked: M/POTTER	Date: 05/12/12
R2 - NOTES UPDATED TO INCLUDE LABEL DETAILS AS PER ECR CR-A274.			
APA: KIDA	Drawn: RBATES	Checked: M/BUTLER	Approved: G/PLTH
			Date: 28/08/14

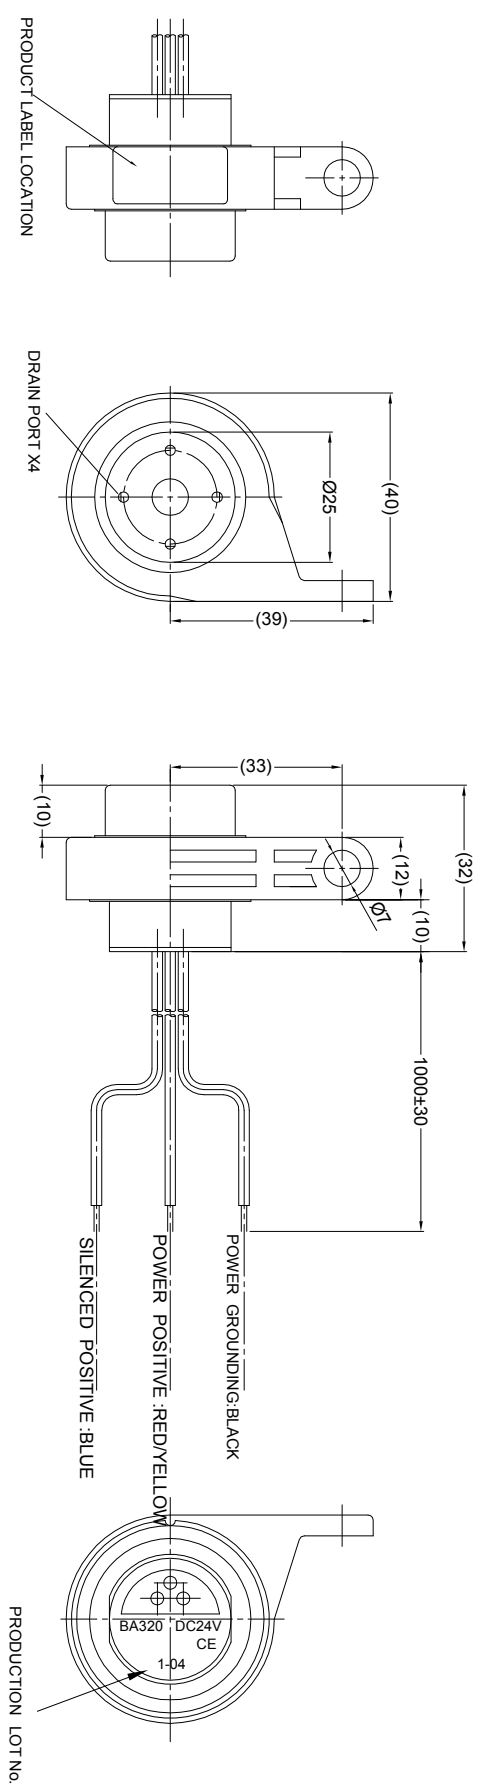

LAST DIGIT OF THE YEAR — PRODUCTION MONTH
 2001 — JAN=01
 FEB=02
 DEC=12

- SPECIFICATION:**
1. RATED VOLTAGE: 12-24 VOLTS DIRECT CURRENT (WORKING VOLTAGE RANGE 9-32 VOLTS)
 2. RATED CURRENT: 20 MILLIAMPERES OR LESS.
 3. SOUND PRESSURE: 90±5 DECIBELS AT TEST VOLTAGES OF 28 VOLTS. REFERENCE SPECIFICATION: 85±5 DECIBELS AT TEST VOLTAGE OF 14. (AS MEASURED AT A DISTANCE OF 1 METERS AND AT A HEIGHT ABOVE THE GROUND)
 4. FREQUENCY: 2900±400HZ AT TEST VOLTAGE OF 28 VOLTS.
 5. INTERMITTENCE: 80±10 CYCLES PER MINUTE AT TEST VOLTAGE OF 28 VOLTS.
 6. DURABILITY: OPERABLE FOR CONSECUTIVE 100 HOURS AT TEST VOLTAGE OF 28 VOLTS.
 7. VOLTAGE-PROOF: DIRECTION VOLTAGE OF ORDER 140VOLTS. OPPOSITE DIRECTION VOLTAGE 200 VOLTS.

- NOTES:**
1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
 2. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002834-XX-14.
 3. "R TRIANGLE" INDICATES CHANGES MADE TO REVISION OF DRAWING AS IDENTIFIED IN NOTES.



PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE
 www.brigade-electronics.com

 Third Angle	Assembly Pl Approval	Approved by	Checked by	Drawn by
		DKERALI	DKERALI	DKERALI
Angle of Projection	Units	Scale	Released	Assembly Ref
	mm	N/A	25/06/04	BA-322
Status	VRA-322			
RELEASED				
Part No	BE-000184-02-04			
9979				