


Revision Notes: _____

Checked By: _____ Approved By: _____ Date Released: _____

ITEM	STOCK CODE	QTY	DESCRIPTION
1	(#09110)	1	BC-VI MASTER
2	(#09111)	1	BC-VI SLAVE
3	(# TBD)	1	FITTING INSTRUCTIONS (NOT SHOWN)

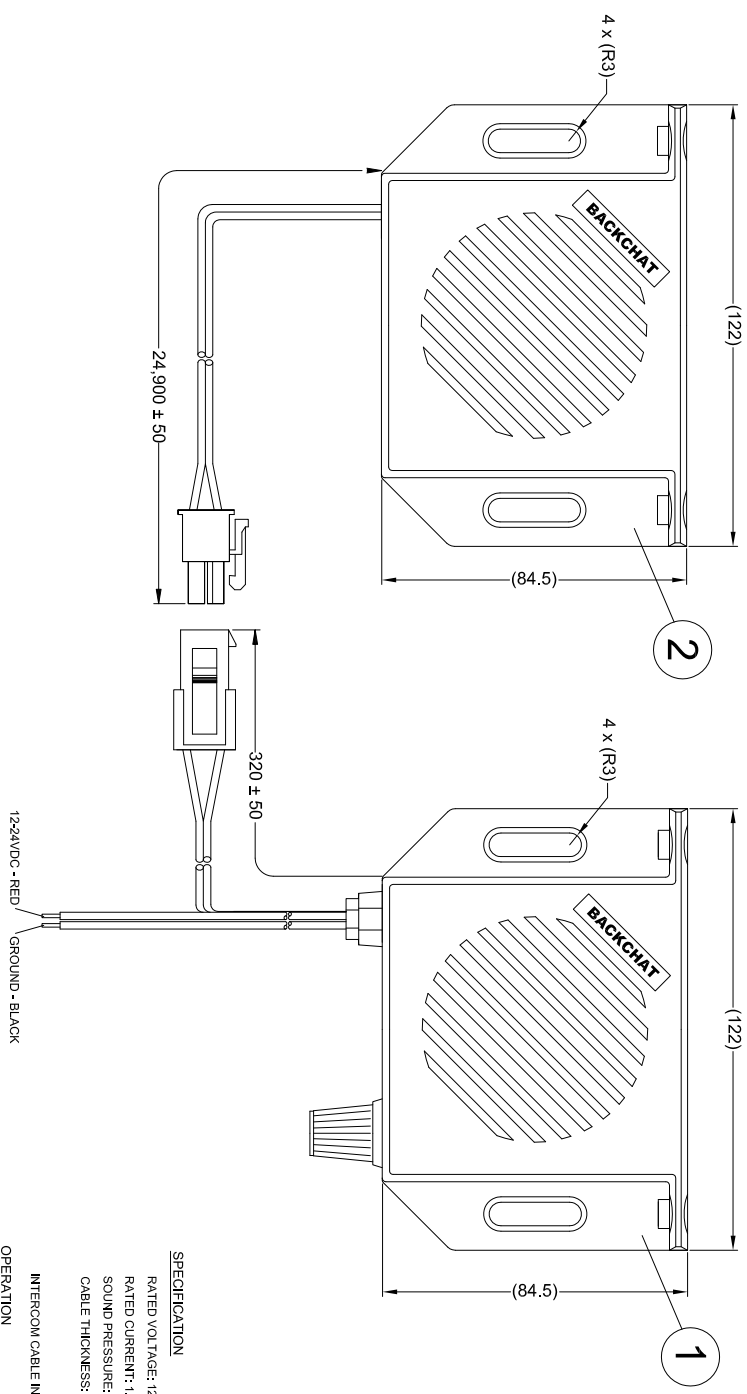

SPECIFICATION

RATED VOLTAGE: 12 AND 24 VOLTS DIRECT CURRENT (WORKING VOLTAGE RANGE 10 THRU 30 VOLTS)
 RATED CURRENT: 1.0 AMPERES OR LESS
 SOUND PRESSURE: MAX 90dB DECIBELS AT TEST VOLTAGE OF 14 AND 28 VOLTS
 CABLE THICKNESS: POWER CABLES 240.2MM
 INTERCOM CABLE 130.2MM IN FIGURE OF 8 CONSTRUCTION
 INTERCOM CABLE INSULATION MUST BE FULLY POTTED AT POINT OF CONNECTION TO PCB.
OPERATION
 MASTER IS ALWAYS LISTENING TO SLAVE UNLESS THE PUSH TO TALK BUTTON IS PRESSED
 UPON WHICH THE MASTER WILL TRANSMIT TO THE SLAVE
 UNIT IS SWITCHED ON BY ROTATING THE CONTROL KNOB CLOCKWISE
 IT CAN THEN BE FURTHER ROTATED TO ADJUST VOLUME

- NOTES:**
1. DIMENSIONS IN MM.
 2. MATERIAL: ABS PLASTIC - ULTRA VIOLET STABILIZED.
 3. FINISH: BLACK
 4. FOR COMPONENT DETAIL REFER TO COMPONENT DRAWINGS.
 5. 4 X M6 X 25 BOLTS, 4 X M6 FLAT WASHER & 4 X M6 NUTS ARE SUPPLIED IN A PRESS SEAL BAG IN THE BOX.
 6. INTERCOM CABLE LENGTH IS MEASURED FROM CABLE ENTRY POINT ON HOUSING.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
 www.brigade-electronics.com

Assembly PI Approval AHEADLE Angle of Projection Third Angle	Approved by DKERAL	Checked by JNEWMAN	Drawn by MBUTLER
	Units mm	Scale N/A	Released 19/10/11
Status RELEASED	BC-VI SYSTEM		
Stock Code #0815	BE-001803-00-11		